


Notes:


1. Backset is measured from centerline of bevel which is centerpoint of door thickness.
2. Door prep with 2-3/4" (69.9) backset meets ANSI standards A115.2 for steel doors and A115.W2 for wood doors plus through bolt holes shown.
3. Dimensions given in inches and (mm).
4. 1-1/4" strike lip suits frame for 1-3/4" thick door. Lip will vary for other door thicknesses.
5. Door prep will vary for 3/4" (19) latch assembly. Refer to template T30528 for details.
6. (*) Outside. For Fire Door only.
7. (**) Inside only. Wire clearance.
8. For Remote Power requirements, CL33803 and CL33805 see sheet 2.

BACKSET "A"	
2-3/4 (69.9)	Regular
3-3/4 (95.3)	Optional
5 (127)	

②

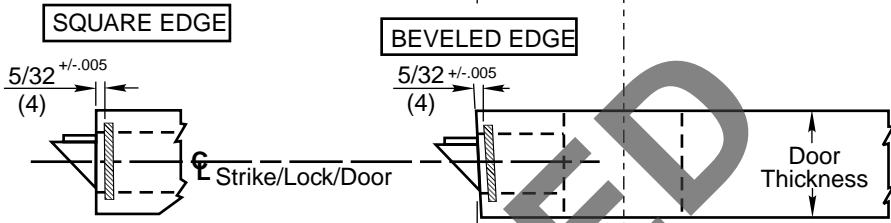

CAUTION: DOOR AND FRAME MANUFACTURERS
When door gasketing or silencers are used, proper allowances must be made for strike location to maintain a common centerline with lock and door as shown so that bolt will freely enter strike.

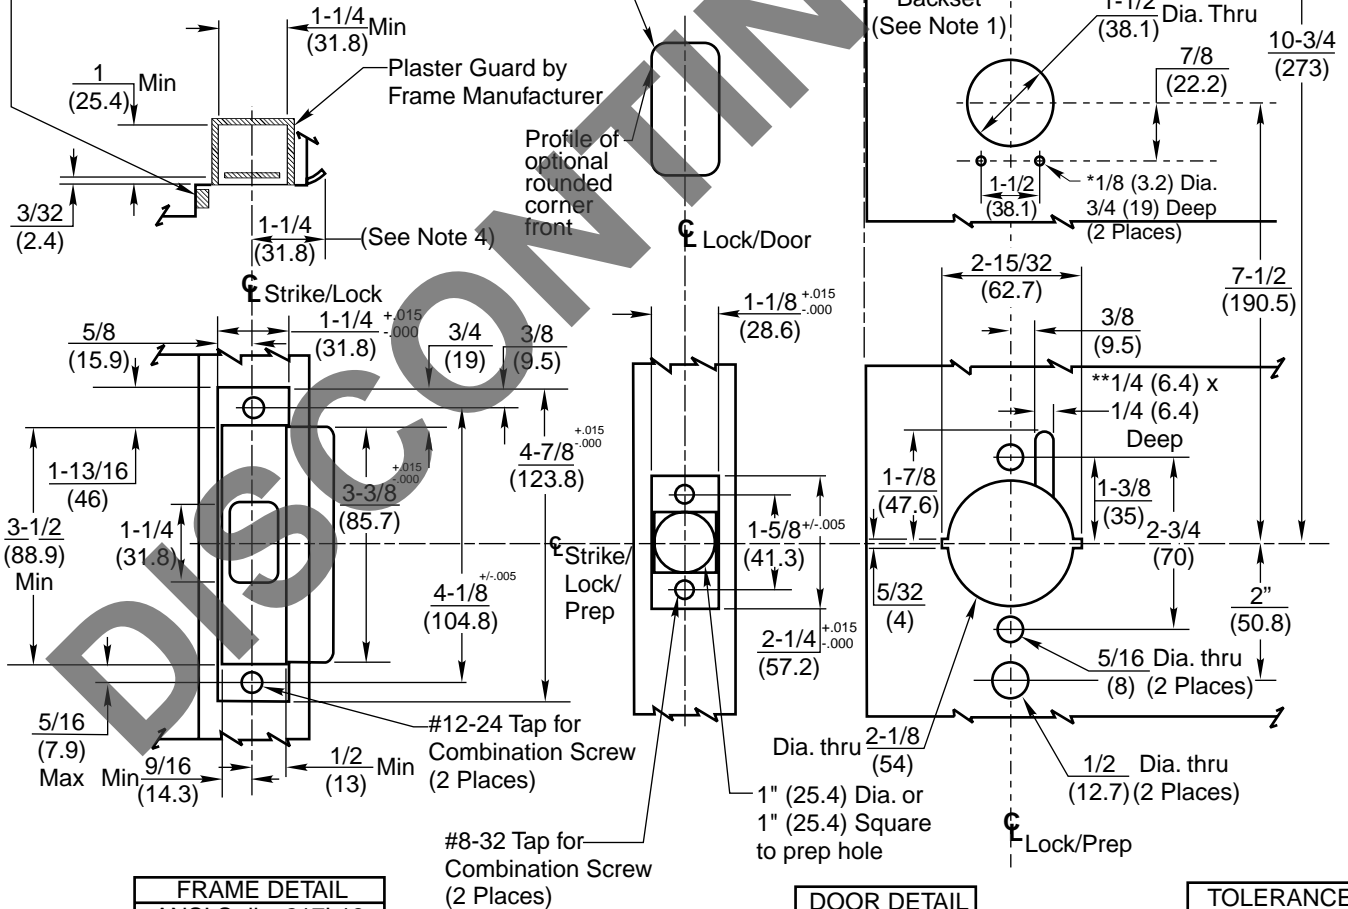

FRAME DETAIL
ANSI Strike 217L13
and Box 120F76
(Regularly Furnished)

DOOR DETAIL

TOLERANCES	
INCHES	(mm)
.005	(.127)
.015	(.381)

**CL33800 Series
Cylindrical Lever Lockset**




Remote Power Supply Door Details

required for CL33803 and CL33805

②

Notes:

1. Dimensions given in inches and (mm).
2. Wire raceway must connect 3/4 (19) counterbore to the hinge edge power source.

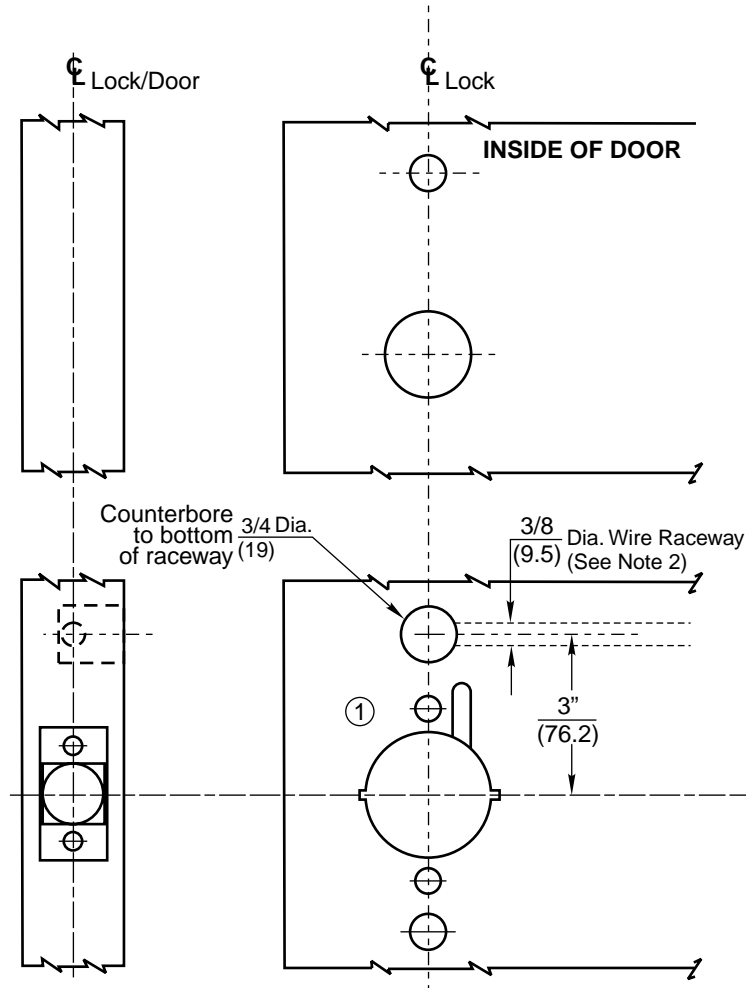

CL33800 Series Cylindrical Lever Lockset

**Corbin
Russwin**

ASSA ABLOY

An ASSA ABLOY Group company

SUPERSEDES T30990-1

DO NOT SCALE DRAWING

TEMPLATE NUMBER

T30990-2

SHEET 2 of 2

DATE 10-07