

MOUNTING INFORMATION

Sex nuts or through bolts are required for wood and plastic covered composite doors, and any type of door without reinforcements and recommended for wood core and metal clad (Kalamein) type doors.

RH SHOWN
LH OPPOSITE


NOTES:

1. Dimensions "A" & "B" apply to centerline of hinge/pivot for butt, swing clear, offset and center hung pivots.
2. Maximum degree of opening for center hung pivot is 140°
3. Dimensions given in inches and (mm).
4. Minimum Top Rail: 4-3/16 (106.4)

Opening Maximum	A	B	Min Door Width
90°	12-3/4 (324)	11-5/8 (295)	27-3/4 (705)
180°	8-11/16 (221)	7-9/16 (192)	23-5/8 (600)

Door Thickness	Sex Nut Length "L"
1-3/8 (35)	1-9/32 (33)
1-3/4 (44) & Over	1-21/32 (42)

CAUTION: Closer To Be Installed In A True Horizontal Position To Ensure Proper Closer Performance.

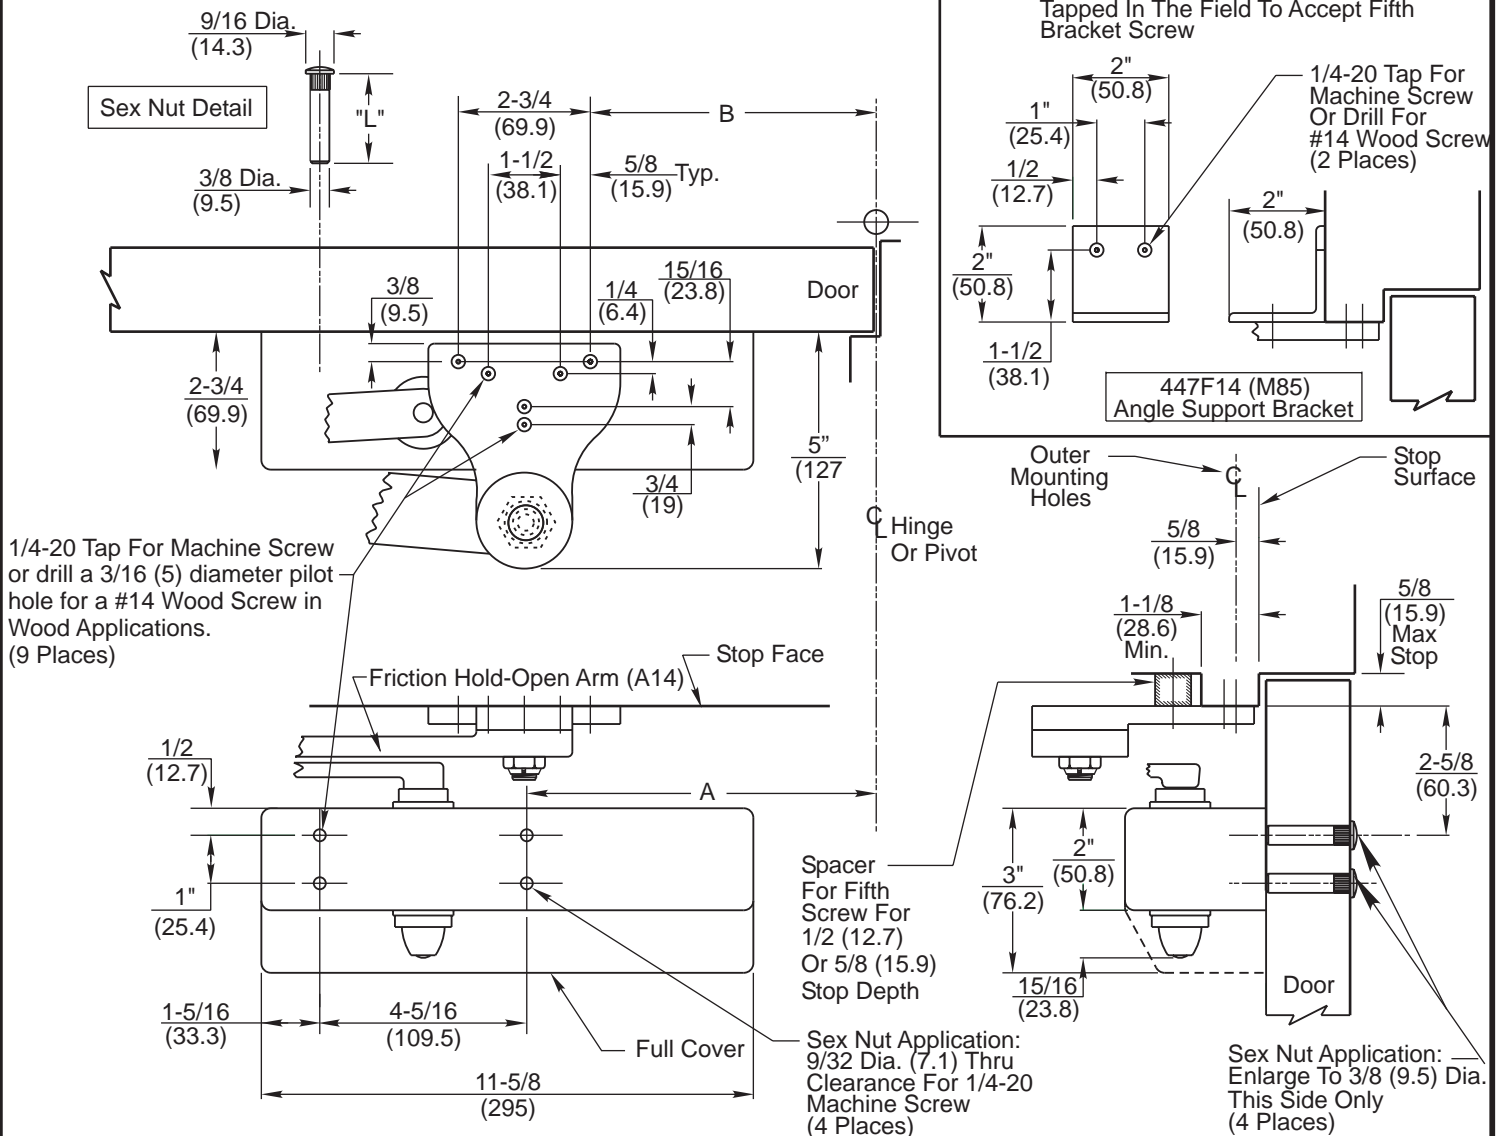

RESPONSIBILITY

Door and Frame Manufacturers are responsible for providing adequate construction or reinforcements for proper installation of hardware shown. All architectural builders hardware must be installed on properly reinforced doors and frames, regardless of the type, material, or method of construction.

DC6210 Series By A14
DC6410 Series By A14

Surface Door Closer
Parallel Arm Mounting
By Friction Hold Open
Heavy Duty Arm



www.corbinrusswin.com

Do Not Scale Drawing

Supersedes Dr. App.

Date 07-06 Template Number T31021