


NOTES:

1. Backset is measured from centerline of bevel which is centerpoint of Door Thickness. "A" is adjustable for 2-3/8 (60.3) or 2-3/4 (69.3)
2. Dimensions given in inches and (mm)
3. Door prep applied to all functions.
4. Door and Frame prep with 2-3/4" (69.9) Backset and 1-1/8" 926.6) Wide Lock Front meets ANSI standard A115.13 (Steel) for Bored Deadlocks.

TEMPLATE CROSS REFERENCE

| DESCRIPTION | TEMPLATE |
|--------------------|----------|
| 423L71 ANSI Strike | T30543 |

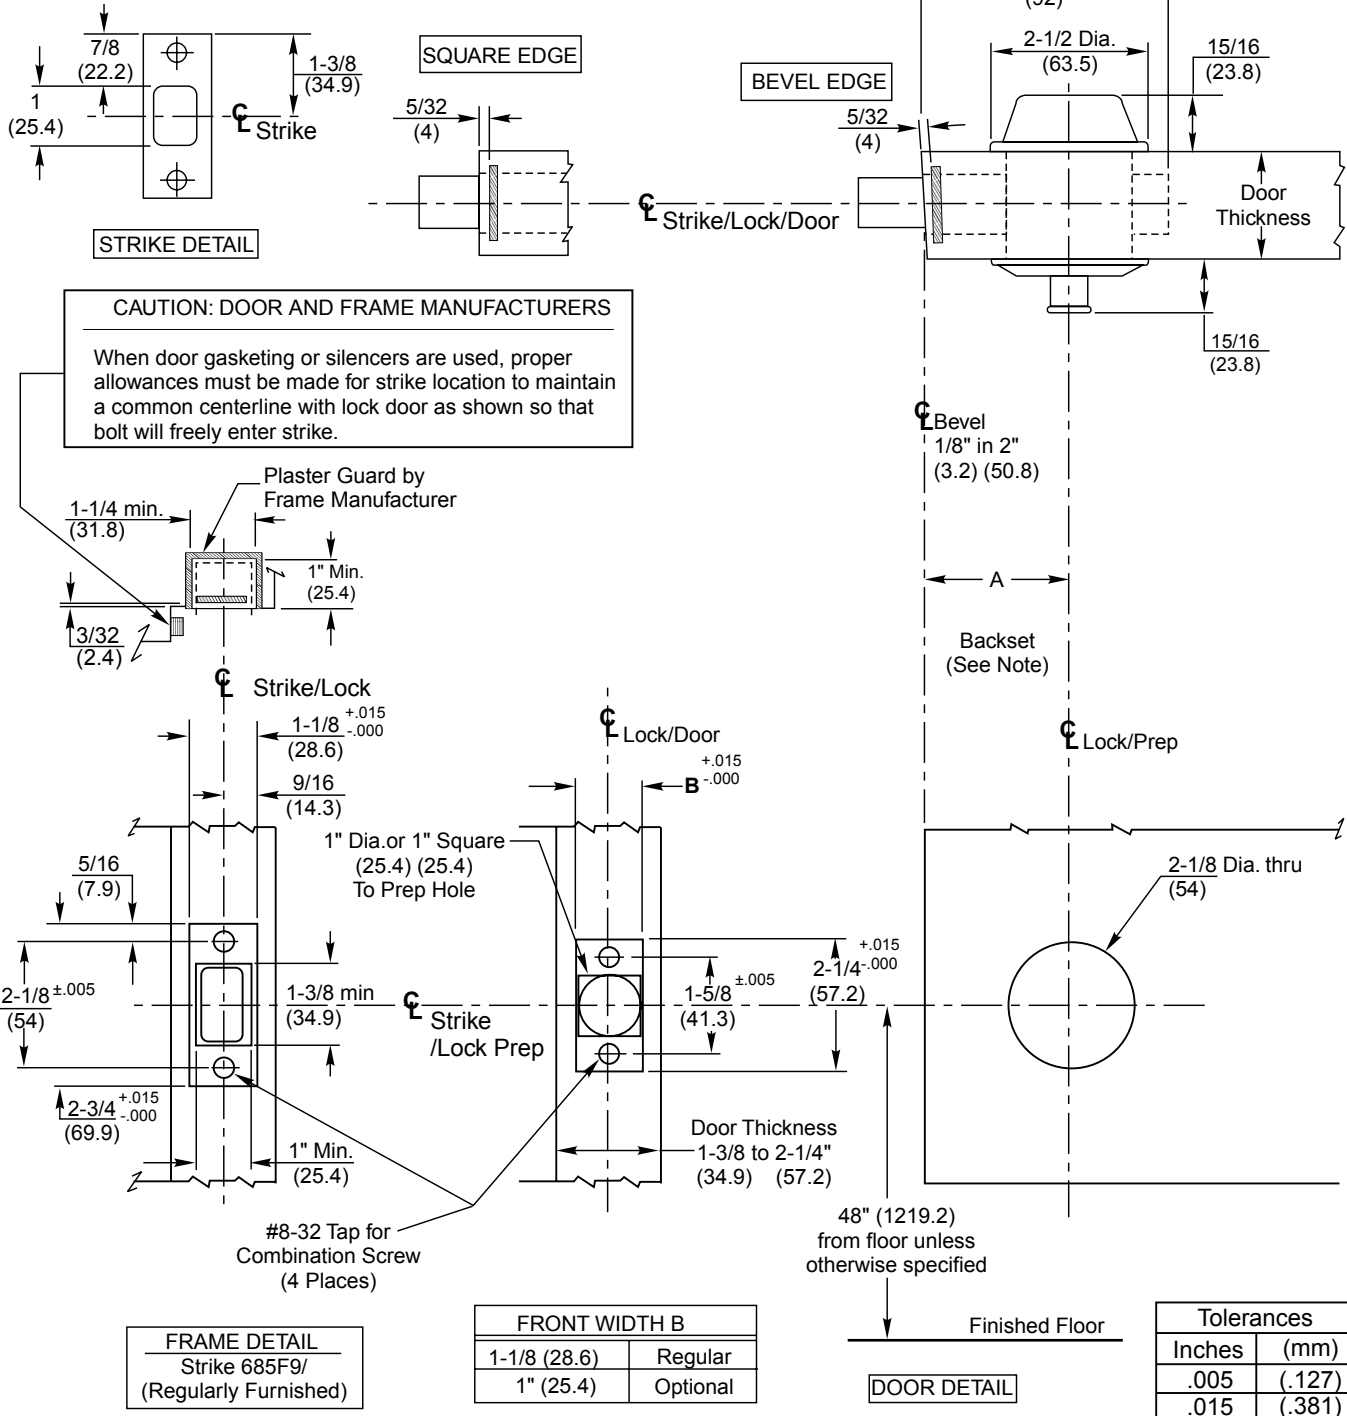

RESPONSIBILITY

Door and Frame Manufacturers are responsible for providing adequate construction or reinforcements for proper installation of hardware shown. All architectural builders hardware must be installed on properly reinforced doors and frames, regardless of the type, material, or method of construction.

DL 3200 Cylindrical Deadbolt
DL 2200 Cylindrical Deadbolt



www.corbinrusswin.com

Do Not Scale Drawing

| | | |
|------------|-------|------------------------|
| Supersedes | Dr. | App. |
| Date | 06-11 | Template Number T31191 |