


NOTES:

1. BACKSET IS MEASURED FROM CENTERLINE OF BEVEL WHICH IS CENTERPOINT OF DOOR THICKNESS.
2. DOOR AND FRAME PREP APPLIES TO ALL FUNCTIONS AND MEETS ANSI STANDARDS A115.13 (STEEL) FOR BORED DEADLOCKS.
3. DIMENSIONS GIVEN IN INCHES AND (MM).
4. NOTCHING OF 2-1/8 (54) DIAMETER CUTOUT PER ANSI STANDARDS A115.2 (STEEL) AND A115.W2 (WOOD) IS PERMISSIBLE BUT NOT REQUIRED. REFER TO APPROPRIATE ANSI 115 STANDARDS FOR DETAILS.

TEMPLATE CROSS REFERENCE

DESCRIPTION	TEMPLATE
423L71 ANSI STRIKE	T30543
394F19 OPTIONAL STRIKE	T30540

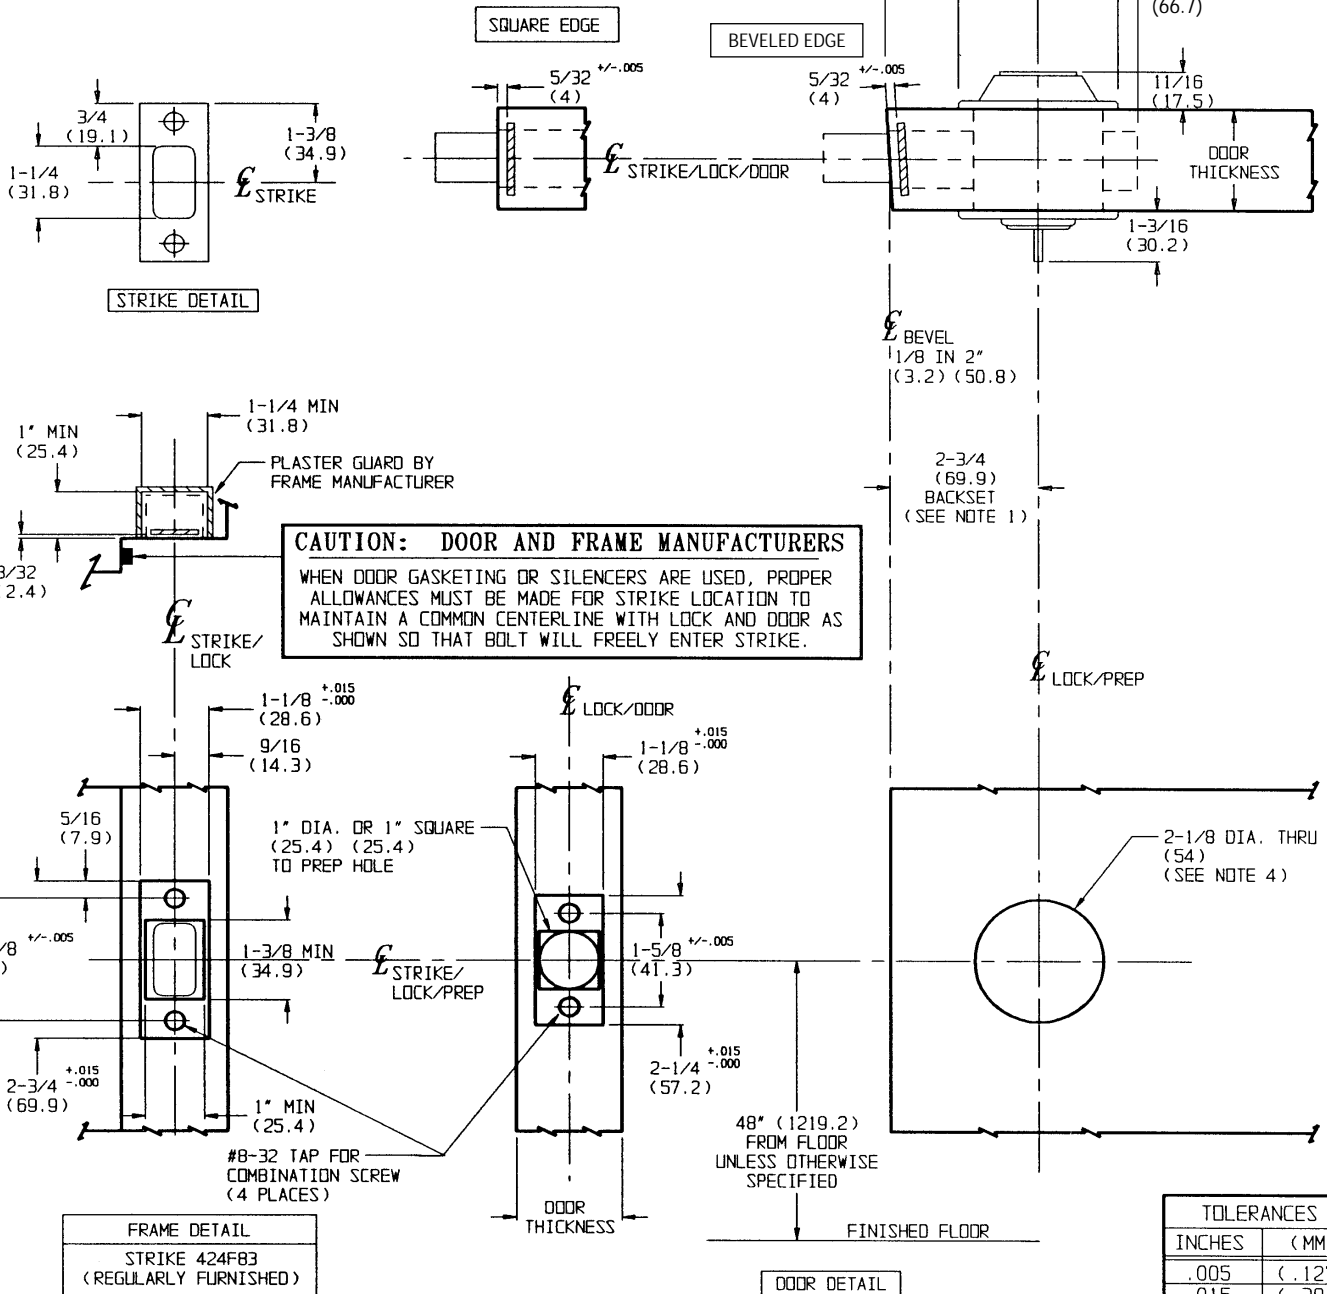

RESPONSIBILITY

Door and Frame Manufacturers are responsible for providing adequate construction or reinforcements for proper installation of hardware shown. All architectural builders hardware must be installed on properly reinforced doors and frames, regardless of the type, material, or method of construction.

DL3000 SERIES
CYLINDRICAL DEADLOCK



www.corbinrusswin.com

DO NOT SCALE DRAWING

SUPERSEDES	T30544	DR.	C J F	DATE	6-04	TEMPLATE NUMBER	T30544-1
------------	--------	-----	-------	------	------	-----------------	----------