



(4) Wood: 3/32" Dia x 1-1/4" Deep
 Metal: #10-24 Inside only
 SNB: 3/8" Through hole

This cutout on inside face of door only. Wood door depth 3/4". (Cutout used for 10 & 55 Function with levers.)


43-1/8" (1095) From Finished Floor
 (Cross Bar 36" (914) From Floor)

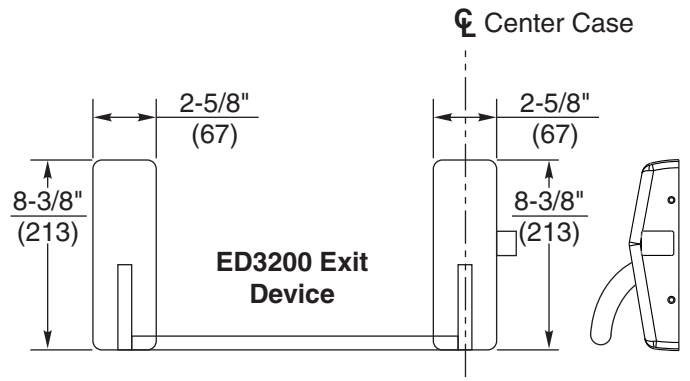


Single Door Using Standard Strike

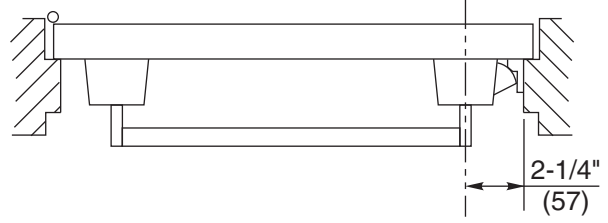

Pair of Doors Using Mullion

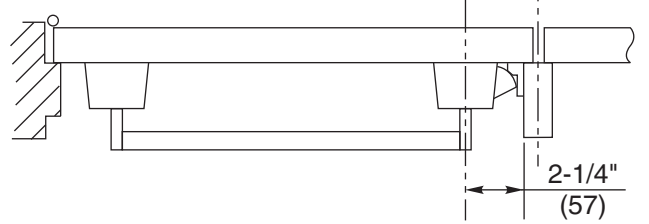

Pair of Doors Without Mullion Using S02 Strike

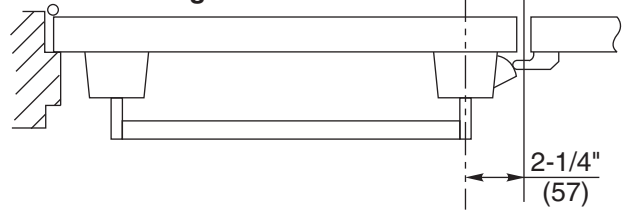

- Note**
1. Do not scale.
 2. Dimensions given in inches (millimeters).

RESPONSIBILITY

DOOR AND FRAME MANUFACTURERS ARE RESPONSIBLE FOR PROVIDING ADEQUATE CONSTRUCTION OR REINFORCEMENTS FOR PROPER INSTALLATION OF HARDWARE SHOWN. ALL ARCHITECTURAL BUILDERS HARDWARE MUST BE INSTALLED ON PROPERLY REINFORCED DOORS AND FRAMES, REGARDLESS OF TYPE, MATERIAL, OR METHOD OF CONSTRUCTION.

**ED3200(A) Rim Exit Device
 Wood and Metal Doors**



ASSA ABLOY

www.corbinrusswin.com

SUPERSEDES	T31220-2	DO NOT SCALE DRAWING
TEMPLATE NUMBER	T31220-3	DATE
		08-15