Installation & Wiring Instructions



FE6600/BL6600/MP6600 Series

End-of-Line Resistors for EcoFlex® Electrified (NAC only) and Integrated Wired (Access 600, SE LP10)

Multi-Point Locks

Description

The EcoFlex multi-point lock platform, including Corbin Russwin Access 600 and SE LP10 Integrated Wired multi-point locks, is now available with internal end-of-line resistors for comprehensive monitoring of the circuit between the access control panel and lock. Integrating the end-of-line resistors into the lock not only eliminates the risk of undetected tampering, but reduces installation costs, simplifies specification, and offers the assurance of a factory installed and tested product.

2 EAC Resistor Configurations

- R01: Mercury/Lenel Standard 1K/2K
- R03: Software House Standard 1K/2K
- R04: AMAG 4-State supervision

NOTE: End-Of-Line Resistor harnesses are designated by blue shrink-tubing.

				Tamper			Normal		Tamper			Normal	
	ID	OEM	Description	REX	Short	Open	Secure	Alarm	DPS	Short	Open	Secure	Alarm
	R01	Mercury/Lenel	Standard 1K/2K	NO	0Ω	∞Ω	2ΚΩ	1KΩ	NC	0Ω	∞Ω	1KΩ	2ΚΩ
	R03	Software House	Standard 1K/2K	NO	0Ω	∞Ω	1ΚΩ	500Ω	NC	0Ω	∞Ω	1ΚΩ	2ΚΩ
	R03	AMAG	4-State Supervision	NO	0Ω	$\infty \Omega$	10КΩ	5ΚΩ	NC	0Ω	∞Ω	4.7ΚΩ	9.4KΩ

A WARNING

This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov.

www.corbinrusswin.com

For installation assistance contact Corbin Russwin 1-800-543-3658 • techsupport.corbinrusswin@assaabloy.com

Copyright © 2017, 2020, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.

FM472 8/20


The ASSA ABLOY Group is the global leader in access solutions. Every day we help people feel safe, secure and experience a more open world.

3



Configure DIP Switch Settings

IMPORTANT: This product is built and factory tested to the configuration specified. Any change to the 3-position DIP-switch settings located at the bottom of the mortise lock body must be made prior to lock installation.

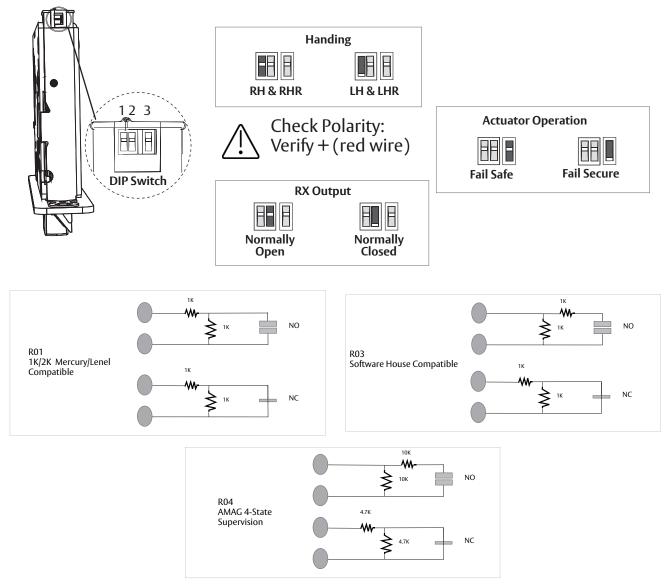

Corbin Russwin, Inc. 225 Episcopal Road Berlin, CT 06037 USA Phone: 800-543-3558 Fax: 800-447-6714 www.corbinrusswin.com

For installation assistance contact Corbin Russwin 1-800-543-3658 • techsupport.corbinrusswin@assaabloy.com

Copyright © 2017, 2020, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.

FM472 8/20

Experience a safer and more open world