



# IN100

## Aperio® Wireless Access Control

*Available through Authorized Channel Partners only. Contact your local ASSA ABLOY Door Security Solutions sales consultant for details.*



# Product Catalog

Experience a safer  
and more open world

## About ASSA ABLOY's Authorized Channel Partner and Certified Integrator Programs


The Corbin Russwin IN100 is part of the expanding ASSA ABLOY family of innovative products combining our proven mechanical locking devices with leading-edge technologies to provide integrated electronic access control solutions. As such, these products require training and certification for resellers and integrators to ensure proper product selection, successful deployment and customer satisfaction.

To aid our customers in this area, ASSA ABLOY has created two programs that provide the necessary training to sell, order, install and service our technology products, including Aperio wireless, Integrated Wiegand, IP-enabled and self-configurable intelligent components:

- The Authorized Channel Partner (ACP) program is open to resellers, who sell ASSA ABLOY's technology products to certified integrators and help with product selection based on the application.
- The Certified Integrator (CI) program provides hands-on training for security systems integrators and network administrators. Not only does this training familiarize certified integrator candidates with product features and applications, it also gives them valuable experience installing, commissioning and troubleshooting the products in a real-world environment.

For more information on the qualifications for becoming an ACP or CI, contact your local ASSA ABLOY Door Security Solutions sales consultant for details.

Sold through:



Authorized Channel Partner  
ASSA ABLOY

Installed by:



Certified Integrator  
ASSA ABLOY

Sold through:



Authorized Channel Partner  
ASSA ABLOY

# Introduction

## IN100 Aperio® Wireless Access Control

### Index

Features and Benefits ..... 4  
 Overview ..... 5

**ML2000 Mortise Locks**  
 Features ..... 6  
 How to Order ..... 7-8  
 Quick Codes ..... 9

**CLX3300 Cylindrical Locks**  
 Features ..... 10  
 How to Order ..... 11  
 Quick Codes ..... 13

**ED5000N Exit Devices**  
 Features ..... 14  
 How to Order ..... 15-16  
 Quick Codes ..... 17

**PED5000 Exit Devices**  
 Features ..... 18  
 How to Order ..... 19-21  
 Quick Codes ..... 22


**IN Series Retrofit Kits for Von Duprin®  
 98/99 series**  
 Features ..... 23  
 How to Order ..... 24

**BL6600/FE6600/MP6600  
 Multi-Point Locks**  
 Features ..... 25  
 How to Order ..... 26-27

Alternative Power Options ..... 28  
 Aperio Configuration Kits ..... 28  
 Aperio Hub ..... 29  
 Available Trim Options Mortise Locks  
 and Exit Devices ..... 30-31  
 How to Order Muséo Piet Levers ..... 32  
 Available Trim Options and Finishes  
 Mortise Locks ..... 33  
 Common Replacement Parts ..... 34

For architectural specifications,  
 consult your Door Security Solutions  
 Representative.

The IN100 offers the convenience and flexibility of Aperio® wireless technology with the real-time communication of online access control, enabling remote lock/unlock in less than 10 seconds. The IN100 also provides simultaneous support for multiple credential types and HID Mobile Access® powered by Seos®. Featuring integrated ANSI/BHMA Grade 1 hardware, the IN100 is ideal for a variety of applications such as schools and corporate office buildings.

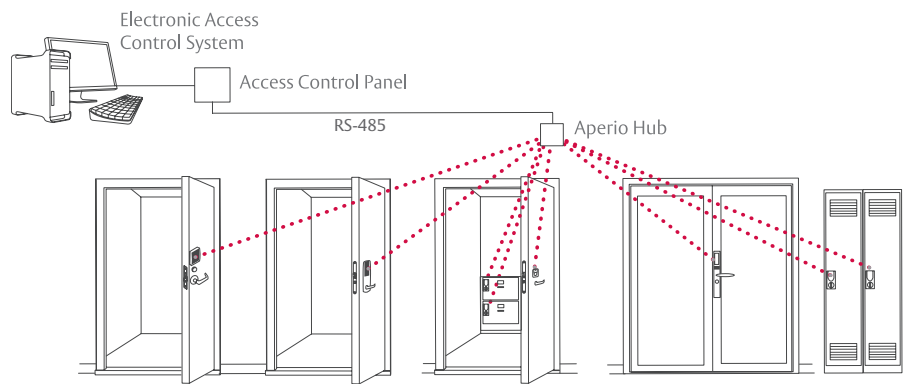

*IP hub also available for direct connection to IT infrastructure*



# Features and Benefits

## IN100 Aperio® Wireless Access Control

Features	Benefits
Utilizes IEEE 802.15.4 wireless communication	<ul style="list-style-type: none"> <li>• Eliminates the greatest cost and inconvenience of wired access control - the wiring around the door</li> <li>• Leverages EAC or IP infrastructure</li> <li>• Ideal for hard-to-wire locations</li> </ul>
multiCLASS SE® Technology from HID Global®	<ul style="list-style-type: none"> <li>• Provides heightened security</li> <li>• Supports: <ul style="list-style-type: none"> <li>– A wide range of credential technologies, offering easy migration to higher security credentials or consolidation of mixed credentials</li> <li>– HID Mobile Access® powered by Seos®, for iOS® and Android™ devices</li> </ul> </li> </ul>
Real-time communication	<ul style="list-style-type: none"> <li>• Alarms and events are communicated in real time to the EAC system</li> <li>• Access decisions are determined in real time by the EAC system</li> <li>• Schedules and door states can be initiated/changed in real time*</li> </ul>
Centralized decision making	<ul style="list-style-type: none"> <li>• System capacities bounded by the EAC system, not the locking device</li> <li>• Access decisions based on the current system information</li> </ul>
Privacy button*	<ul style="list-style-type: none"> <li>• Enables shelter in place/local lockdown</li> <li>• Offers privacy capabilities for applications such as restrooms</li> </ul>
Smart Credential Cache	<ul style="list-style-type: none"> <li>• Allows previously authorized credentials to be granted access when the EAC infrastructure is offline for any reason</li> <li>• Can be enabled/disabled</li> <li>• Programmable cache size/validity time</li> </ul>
Integrated ANSI/BHMA Grade 1 hardware, available in cylindrical lock, mortise lock, multi-point and exit device configurations	<ul style="list-style-type: none"> <li>• Flexibility to support various openings</li> <li>• Assurance of high quality Corbin Russwin hardware</li> </ul>
Superior aesthetics	<ul style="list-style-type: none"> <li>• Blends into any environment seamlessly</li> <li>• Designed to meet the requirements of designers and architects</li> <li>• Available with a wide range of finishes and decorative levers</li> <li>• Suites with other IN Series locks, regardless of technology</li> </ul>

\*Access Control Partner software dependent. Contact your local ASSA ABLOY Integrated Solutions Specialist for more information.

Sold through:



Authorized Channel Partner  
ASSA ABLOY

# Overview

## IN100 Aperio® Wireless Access Control

### Credential Support:

IN100 locks feature HID® multiCLASS SE® technology

to support the following credentials:

- High Frequency (13.56 MHz):
  - HID iCLASS®
  - HID iCLASS SE® (SIO-enabled)
  - HID iCLASS® Seos™
  - HID MIFARE® SE
  - HID DESFire® EV1 SE
  - MIFARE Classic
  - DESFire EV1
  - DESFire EV2/EV3 (EV1 Compatibility)
  - PIV/PIV-I (40-bit BCD, 64-bit BCD, 75 bit, 128-bit or 200-bit outputs)
- Low Frequency (125 kHz):
  - HID Prox®, AWID, EM4102
- NFC & BLE-enabled Mobile Phones:
  - HID Mobile Access® (BLE and NFC)
  - Apple Wallet Seos or DESFire® (NFC)
  - Google Wallet DESFire® (NFC)

### Environmental Specifications:

- Operating temperature:
  - 13°F (-25°C) to 151°F (66°C)
- Humidity: < 85% non-condensing
- Storage temperature:
  - 22°F (-30°C) to 176°F (80°C)

### Security:

- AES 128-bit encryption
- For specific security information, please contact your local ASSA ABLOY Door Security Solutions sales representative or call 800-810-Wire.



### Software:

- Works with ASSA ABLOY Aperio Access Control Partner software, allowing simple integration into existing or new systems
- Software Development Kits (SDK) and support available to integrate into other third party access control systems.

For assistance, email:

OEMSupport\_Group@assaabloy.com

## Battery Life

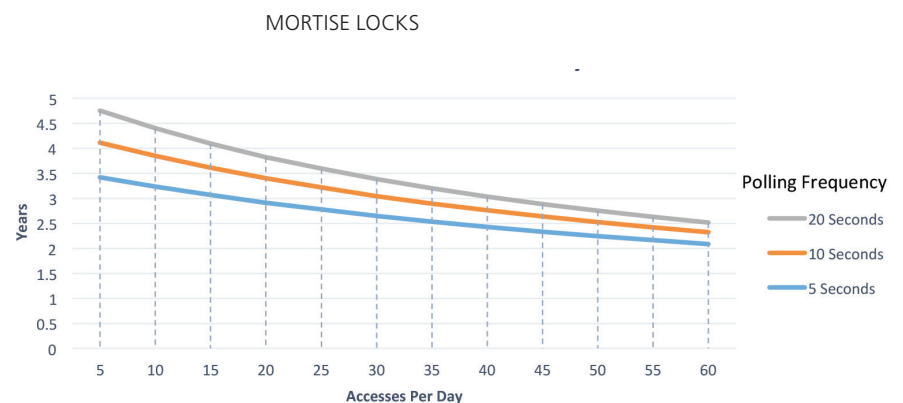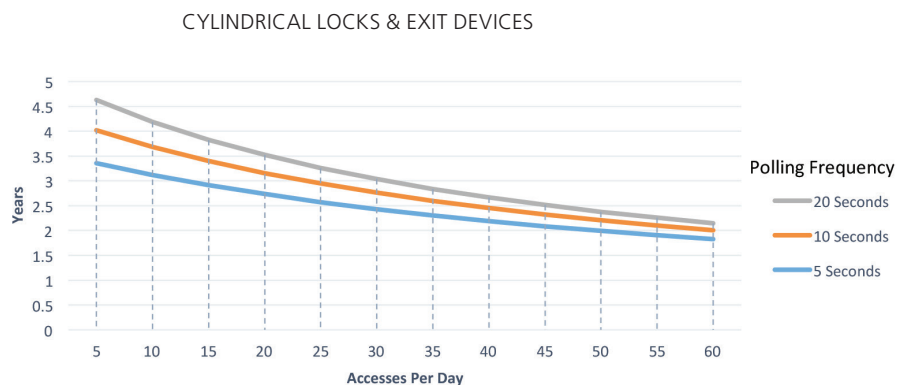

Battery life data was calculated using Duracell batteries.



# Features

## ML2000 IN100 Mortise Locks



Mortise Lock  
ML2000

The IN100 mortise lock has a clean, crisp design and is available with a variety of lever designs and hardware finishes. EcoFlex® technology offers improved battery life.

### Features

#### Handing

Handed; quick reversibility. The lockset can be re-handed without disassembling the lock body.

#### Door Thickness

1-3/4" (44mm) standard.  
Optional 2" (50mm) to 2-1/4" (57mm); see Quick Code section.

#### Backset

2-3/4" (70mm).

#### Lockcase

Heavy-gauge chrome plated steel,  
5-7/8" (149mm) x 4" (102mm) x 15/16"  
(24mm).

#### Front

Heavy-gauge steel, 8" (203mm) x 1-1/4"  
(32mm) x 3/32" (2mm). Accommodates  
non-beveled and beveled doors 1/8"  
(3mm) in 2" (51mm).

#### Armored Front

Wrought brass, bronze or stainless steel  
attached by machine screws to lockcase  
front.

#### Latch

Quick, reversible 2-piece mechanical with  
anti-friction insert 5/8" (16mm) x 1"  
(25mm) x 3/4" (19mm).

#### Auxiliary Latchbolt

9/16" (14mm) effective throw and  
3/8" (10mm) effective auxiliary latch  
deadlocking.

#### Deadbolt

One-piece stainless steel, 19/32" (15mm) x  
1-1/4" (32mm) x 1" (25mm) throw.

#### Hub

Steel, 5/16" (8mm).

#### Strike

Wrought brass, bronze or stainless steel  
ANSI straight lip standard, 4-7/8" (124mm)  
x 1-1/4" (32mm) x 1-1/8" (29mm) lip to  
center.

Optional strikes, lip lengths and ANSI  
wrought strike box available.

#### Cylinder

CR1000-118-A01, 6-pin, L4, keyed  
random, furnished standard for 1-3/4"  
(44mm) door.

Optional cylinders available.

#### Keying Features Available

Master keying  
Construction master keying  
Visual key control  
Concealed key control  
Interchangeable core (LFIC OR SFIC)

#### Security

Security LFIC  
Access 3  
Access 3 LFIC  
Pyramid  
Pyramid LFIC

#### Environmental Specifications

*Operating Temperature:*  
-13°F (-25°C) to 151°F (66°C)

*Operating humidity:*  
5% to 95% relative humidity  
non-condensing

#### EcoFlex®

EcoFlex technology reduces power  
consumption up to 92% as certified by  
GreenCircle

#### ML20100 Monitoring

- Request to Exit
- Door Position (external)

#### ML20200 Monitoring

- Request to Exit
- Deadbolt
- Auxiliary latch
- Latch bolt
- DPS cylinder monitoring (indirect)  
integrated into lock body

#### Warranty

10-year limited mechanical.  
2-year limited electrical.

#### Shipping Weight

Approx. 11 lbs.

### Certification/Compliance

#### ANSI/BHMA

Meets A156.13, Grade 1 requirements.  
Meets A117.1 Accessibility Code.  
Meets A156.25 requirements.

#### UL /ULC-UL10C Positive Pressure

All locks listed for A label and lesser class  
doors, 4' (122cm) x 10' (305cm) single  
or 8' (244cm) x 10' (305cm) pair. Letter F  
and UL symbol on armored front indicate  
listing.

Any retrofit or other field modification to  
a fire rated opening can potentially impact  
the fire rating of the opening, and Corbin  
Russwin, Inc. makes no representations or  
warranties concerning what such impact  
may be in any specific situation. When  
retrofitting any portion of an existing fire  
rated opening, or specifying and installing  
a new fire-rated opening, please consult  
with a code specialist or local code official  
(Authority Having Jurisdiction) to ensure  
compliance with all applicable codes and  
ratings.

Sold through:



Authorized Channel Partner  
ASSA ABLOY

# How to Order

## ML2000 IN100 Mortise Locks

Build your order string:

				Required Options			Other Options
Function	Trim	Finish	Handing	Technology Code	Reader Code	Reader Modifier	Cylinder, Strike, Door Thickness
ML201__	---	---	---	IN100	BIPS	--	----

For finish, additional cylinder, and/or mechanical options, please refer to page 9.

Function	Type	Monitoring	Function Description
ML20133 No Key Override No Deadbolt	Entry		<ul style="list-style-type: none"> <li>Deadlocking latch</li> <li>Latch retracted by inside lever at all times</li> <li>Outside lever rigid except when in "passage" mode or valid credential presented</li> </ul>
ML20134 With Key Override No Deadbolt	Entry	<ul style="list-style-type: none"> <li>Request to Exit</li> <li>Door Position (external)</li> </ul>	<ul style="list-style-type: none"> <li>Deadlocking latch</li> <li>Latch retracted by inside lever at all times</li> <li>Outside lever rigid except when in "passage" mode or valid user code entered</li> <li>Key outside retracts latch</li> <li>No deadbolt function</li> </ul>
ML20233 No Key Override No Deadbolt	Entry		<ul style="list-style-type: none"> <li>Deadlocking latch</li> <li>Latch retracted by inside lever at all times</li> <li>Outside lever rigid except when in "passage" mode or valid user code entered</li> </ul>
ML20234 With Key Override No Deadbolt	Entry	<ul style="list-style-type: none"> <li>Request to Exit</li> <li>Deadbolt</li> <li>Auxiliary latch</li> <li>Latch bolt</li> <li>DPS cylinder monitoring (indirect) integrated into lock body</li> </ul>	<ul style="list-style-type: none"> <li>Deadlocking latch</li> <li>Latch retracted by inside lever at all times</li> <li>Outside lever rigid except when in "passage" mode or valid user code entered</li> <li>Key outside retracts latch</li> <li>No deadbolt function</li> </ul>
ML20235 No Key Override With Deadbolt <sup>1</sup>	Entry		<ul style="list-style-type: none"> <li>Deadlocking latch</li> <li>Latch and deadbolt retracted by inside lever at all times</li> <li>Outside lever rigid except when in "passage" mode or valid user code entered</li> </ul>
ML20236 With Key Override With Deadbolt <sup>1</sup>	Entry		<ul style="list-style-type: none"> <li>Deadlocking latch</li> <li>Latch and deadbolt retracted by inside lever and deadbolt at all times</li> <li>Outside lever rigid except when in "passage" mode or valid user code entered</li> <li>Key outside projects or retracts deadbolt and retracts latch</li> </ul>

Reader Code	Credentials
BIPS	HID Prox®, iCLASS®, iCLASS SE®, iCLASS® Seos®, SIO on MIFARE® Classic, SIO on MIFARE DESFire® EV1 MIFARE Classic, MIFARE DESFire EV1, HID Mobile Access, Apple Wallet, Google Pay

Reader Modifier	Description
B	Black reader, black trim
MB	Black reader, metal trim

Note: Metal trim for the reader is supplied in the finish specified in the order string. It is not available in stainless steel (629/630/630C) but will be plated to match.



# How to Order

## ML2000 IN Series Mortise Locks

### Finishes

Description	Specify	Description	Specify	Description	Specify
Polished Brass, Clear Coated	605	Polished Nickel	618	Satin Stainless Steel	629*
Satin Brass, Clear Coated	606	Satin Nickel	619	Bright Stainless Steel	630*
Polished Bronze, Clear Coated	611	Polished Chrome	625	Satin Stainless Steel with MicroShield®	630C*
Satin Bronze, Clear Coated	612	Satin Chrome	626	Black Suede Powder Coat	BSP
Dark Oxidized Satin Bronze, Oil Rubbed	613	Satin Chrome with MicroShield®	626C	White Suede Powder Coat	WSP
Dark Oxidized Satin Bronze - Equivalent	613E	Black Oxidized Bronze, Oil Rubbed	722		

\*Metal escutcheon trim (MB) plated to match

### Roses


The roses shown are some of our most popular styles. To see the complete list of available roses, refer to page 33.



T



X



E2



E3



E4<sup>1</sup>

### Levers

The levers shown here are some of our most popular styles from the Muséo Collection. To see the complete range of levers, refer to pages 30-31.



102



103



110



124<sup>2</sup>



125<sup>2</sup>



123<sup>2</sup>

### Premium Levers



21M



21S



133



134<sup>2</sup>



136



138<sup>2</sup>

1 Rose design suites with IN100 reader.  
2 Lever returns within 1/2" (13 mm) of door face.



Sold through:



Authorized Channel Partner  
ASSA ABLOY

# Quick Codes

## ML2000 IN Series Mortise Locks

### Cylinders and Keying

Description	Specify
Conventional 6-pin	(standard)
Conventional 7-pin	7P
Less Cylinder(s)	LC
<b>LFIC</b>	
LFIC 6-pin	C6
LFIC 6-pin with Temporary Construction Core (Red)	CT6R
LFIC 6-pin with Temporary Construction Core (Blue)	CT6B
LFIC 6-pin with Temporary Construction Core (Green)	CT6G
LFIC 6-pin Less Core	CL6
LFIC 7-pin	C7
LFIC 7-pin with Temporary Construction Core (Red)	CT7R
LFIC 7-pin with Temporary Construction Core (Blue)	CT7B
LFIC 7-pin with Temporary Construction Core (Green)	CT7G
LFIC 7-pin Less Core	CL7
<b>SFIC</b>	
SFIC 6-pin with Less Core	CLS6
SFIC 6-pin with SFIC disposable temporary core	CT6SD
SFIC 7-pin with Less Core	CLS7
SFIC 7-pin with SFIC disposable temporary core	CT7SD
<b>Security</b>	
Security	HS
Security IC	CHS
<b>Access 3®</b>	
Access 3® Patented	AP
Access 3® Security	AS
Access 3® High Security	AHS
Access 3® Patented IC	ACP
Access 3® Security IC	ACS
Access 3® High Security IC	ACHS
<b>Pyramid</b>	
Pyramid Fixed Core	PHS
Pyramid IC	PCHS
Pyramid IC Less Core	CLP
Pyramid with Temporary Construction Core	CTP
Pyramid Security	PS
Pyramid Security IC	PCS
Pyramid Disposable Core	CTPD
<b>Keying and Keys</b>	
6-pin Disposable Core	CT6D
7-pin Disposable Core	CT7D
Keyed Random (Standard)	KR
Construction Master Keyed (not available for Pyramid)	CMK
2 Keys per Lock	(standard)
More than 2 Keys	KY# (e.g., KY6)

### Cylinders and Keying (Cont.)

Description	Specify
<b>Visual Key Control</b>	
No Keying Data Stamped on Key or Cylinder	VKC0
Keys Only	VKC1
Cylinders and Keys (not for HS, CHS, PHS or PCHS)	VKC2
Cylinders Only (not for HS, CHS, PHS or PCHS)	VKC3
<b>Concealed Key Control (CKC)</b>	
CKC Cylinders with VKC Keys	CKC2
CKC Cylinders Only (not for PHS, PCHS)	CKC3

### Miscellaneous Options

Description	Specify
Torx® head screws	M04
ANSI wrought strike box	M17
Knurling outside and inside <sup>1</sup>	M20 <sup>2</sup>
Knurling outside only <sup>1</sup>	M21 <sup>2</sup>
Knurling inside only <sup>1</sup>	M22 <sup>2</sup>
Abrasive coat outside and inside <sup>1</sup>	M23
Abrasive coat inside only <sup>1</sup>	M24
Abrasive coat outside only <sup>1</sup>	M25

### Door Thickness

Door Thickness	Specify
1-3/4" (44mm)	(standard)
1-7/8" (48mm)	D178
2" (51mm)	D200
2-1/8" (54mm)	D218
2-1/4" (57mm)	D214

### Strikes


ANSI Lip to Center	ANSI Straight Lip Specify	Curved Lip Specify
7/8" (22mm)	SS078	N/A
1-1/8" (29mm)	(standard)	N/A
1-1/4" (32mm)	SS114	SA114
1-3/8" (35mm)	SS138	SA138
1-1/2" (38mm)	SS112	SA112
1-3/4" (44mm)	SS134	SA134
2" (51mm)	SS200	SA200
2-1/4" (57mm)	SS214	SA214
2-1/2" (64mm)	SS212	SA212
2-3/4" (70mm)	SS234	SA234
3" (76mm)	SS300	SA300
Open Back Strike	Door Thickness	Specify
	1-3/4" (44mm)	SB134
	2" (51mm)	SB200
	2-1/4" (57mm)	SB214
Rabbeted front and strike - Specify		SR118

### Thumbturns

Description	Specify
Decorative	MT1
Decorative Square	MT2
Decorative Cylinder	MT2

### Handing

Hand	Specify
Right Hand	RH
Left Hand	LH
Right Hand Reverse	RHR
Left Hand Reverse	LHR

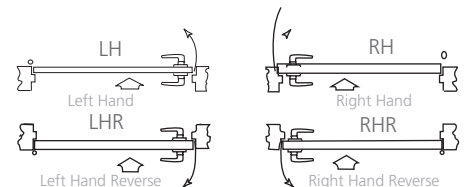


Note: Arrow indicates secure side of door.



# Features

## CLX3300 IN100 Cylindrical Lock

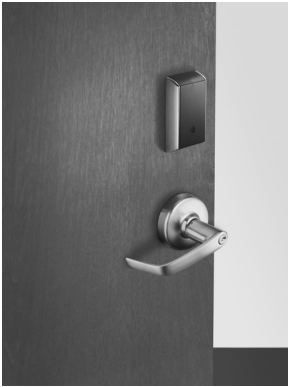

Cylindrical Lock  
CLX33100

The IN100 CLX3300 design provides uniformity when used with other Corbin Russwin CLX3300 locks at a facility. The product features seven different lever designs, thirteen hardware finishes and cylinder override.

### Strike

Wrought brass or stainless steel ANSI curved lip standard, 4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/4" (32mm) lip to center.

Optional strikes, lip lengths and ANSI wrought strike box available

### Cylinder

Brass, 6-pin, L4 keyway, 0-bitted standard.

### Keying Features Available

Master keying  
Construction master keying  
Visual key control  
Concealed key control  
Interchangeable core (LFIC or SFIC)  
Security  
Security LFIC  
Access 3  
Access 3 LFIC  
Pyramid  
Pyramid LFIC

### Environmental Specifications

- Operating temperature: -13°F (-25°C) to 151°F (66°C)
- Operating humidity: 5% to 95% relative humidity non-condensing

### Keys

Two nickel silver standard.

### Key Override

Standard not available with non-key override.

### EcoFlex®

EcoFlex technology reduces power consumption up to 92% as certified by GreenCircle

### Monitoring

- Request to Exit (Non-Handed)
- Door Position Switch (Supplied and mounted above the lock. Connects directly into the lock's electronics.)

### Warranty

10-year limited mechanical;  
2-year limited electrical.

### Shipping Weight

Approx. 11 lbs.

### Certification/Compliance

#### ANSI/BHMA

Meets A156.2 Grade 1 requirements.

#### California State Reference Code

(Formerly Title 19, California State Fire Marshal Standard) All levers with returns comply; levers return to within 1/2" (13mm) of door face.

#### UL IULC-UL10C Positive Pressure

All locks with 1/2" (13mm) throw latchbolt listed for A label and lesser class 4' x 10' single doors. All locks with 3/4" (19mm) throw latchbolt listed for A label and lesser class 8' x 10' pairs of doors. Letter F and UL symbol on latch front indicate listing.

Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and Corbin Russwin, Inc. makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

## Features

### Non-handed

#### Door Thickness

1-3/4" (44mm) to 2" (50mm) standard,  
2" (50mm) to 2-1/4" (57mm) optional

#### Lock Chassis

Steel, zinc dichromated for corrosion resistance.

#### Backset

2-3/4" (70mm) standard.  
Optional: 3-3/4" (95mm) and 5" (127mm).

#### Latchbolt

Stainless steel, 1/2" (13mm) throw.  
Optional: 3/4" (19mm) throw deadlocking fire latch for pair of doors.

#### Auxiliary Latchbolt

Deadlocking latchbolt prevents manipulation when door is closed.

#### Front

Wrought brass or stainless steel,  
2-1/4" (57mm) x 1-1/8" (29mm).  
Accommodates non-beveled and beveled doors 1/8" (3mm) in 2" (51mm).  
Optional: rounded corners.

Sold through:



Authorized Channel Partner  
ASSA ABLOY

# How to Order

## CLX3300 IN100 Cylindrical Lock

Build your order string:

				Required Options			Other Options
Function	Trim	Finish	Handing	Technology Code	Reader Code	Reader Modifier	Cylinder, Strike, Door Thickness
CLX33134	---	---	---	IN100	BIPS	--	—

For finish, additional cylinder, and/or mechanical options, please refer to page 13.

Series/Function	Type	Function Description
CLX33134 With Key Override	Entry	<ul style="list-style-type: none"> <li>• Latch retracted by inside lever at all times.</li> <li>• Key outside retracts latch.</li> <li>• Outside lever locked (freewheeling) except when in "passage" mode or valid user code entered.</li> </ul>

Reader Modifier	Description
B	Black reader, black trim
MB	Black reader, metal trim

Note: Metal trim for the reader is supplied in the finish specified in the order string.




# Trim


## CLX3300 IN100 Cylindrical Lock

### Levers - Solid Cast Zinc


**Armstrong  
AZ**



**Newport\*  
NZ**




**Princeton\*  
PZ**




### Decorative Levers


**102**




**106**



**123\***




**124\***



\*Lever with return to within 1/2" of door face.

### Rose Wrought Brass

**D**



Sold through:



Authorized Channel Partner  
ASSA ABLOY

# Quick Codes

## CLX3300 IN100 Cylindrical Lock

### Cylinders and Keying

Description	Specify
Conventional 6-pin	(standard)
Conventional 7-pin	7P
Less Cylinder(s)	LC
<b>LFIC</b>	
LFIC 6-pin	C6
LFIC 6-pin Less Core	CL6
LFIC 6-Pin Disposable Core	CT6D
LFIC 6-pin with Temporary Construction Core (Red)	CT6R
LFIC 6-pin with Temporary Construction Core (Blue)	CT6B
LFIC 6-pin with Temporary Construction Core (Green)	CT6G
LFIC 7-pin	C7
LFIC 7-pin Less Core	CL7
LFIC 7-Pin Disposable Core	CT7D
LFIC 7-pin with Temporary Construction Core (Red)	CT7R
LFIC 7-pin with Temporary Construction Core (Blue)	CT7B
LFIC 7-pin with Temporary Construction Core (Green)	CT7G
<b>SFIC (all lever designs)</b>	
SFIC 6-pin	C6S
SFIC 6- or 7-pin Disposable Core	CTSD
SFIC 6-pin with Temporary Construction Core (Blue)	CT6SB
SFIC 7-pin	C7S
SFIC 7-pin with Temporary Construction Core (Blue)	CT7SB
<b>Security</b>	
Security	HS
Security LFIC	CHS
<b>Access 3®</b>	
Access 3 Patented Fixed Core	AP
Access 3 Security Fixed Core	AS
Access 3 High Security Fixed Core	AHS
Access 3 Patented LFIC	ACP
Access 3 Security LFIC	ACS
Access 3 High Security LFIC	ACHS
<b>Pyramid</b>	
Pyramid Security Fixed Core	PS
Pyramid High Security Fixed Core <sup>1</sup>	PHS
Pyramid Security LFIC	PCS
Pyramid High Security LFIC	PCHS
Pyramid LFIC Less Core	CLP
Pyramid with Temporary Construction Core	CTP
Pyramid Disposable Core	CTPD

### Cylinders and Keying

Description	Specify
<b>Keying and Keys</b>	
0-bitted with 2 blank keys	(standard)
Keyed Random	KR
Construction Master Keyed	CMK
2 keys per lock	(standard)
More than 2 keys	KY# (e.g., KY6)
<b>Visual Key Control (VKC)</b>	
No biting or keyset stamping on keys	VKC0
Keys only	VKC1
Cylinders and keys (not for AS, AHS, ACS, ACHS, HS, CHS, PHS or PCHS)	VKC2
Cylinders only (not for AS, AHS, HS, ACS, ACHS, CHS, PHS or PCHS)	VKC3
<b>Concealed Key Control (CKC)</b>	
CKC cylinders with VKC keys	CKC2
CKC cylinders only (not for AS, AHS, ACS, ACHS, PHS, PCHS)	CKC3
Schlage® C keyway cylinder (0-Bitted or KR) <sup>1</sup>	C
SARGENT® LA keyway cylinder (0-Bitted) <sup>1</sup>	LA

### Finish

Description	Specify
Polished Brass, Clear Coated	605
Satin Brass, Clear Coated	606
Polished Bronze, Clear Coated	611
Satin Bronze, Clear Coated	612
Dark Oxidized Satin Bronze, Oil Rubbed	613
Dark Oxidized Satin Bronze - Equivalent	613E
Polished Nickel	618
Satin Nickel	619
Polished Chrome	625
Satin Chrome	626
Black Oxidized Bronze, Oil Rubbed	722
Satin Chrome with MicroShield®	626C
Black Suede Powder	BSP
White Suede Powder	WSP

### Backset

Description	Specify
2-3/4" (70mm)	(standard)
3-3/4" (95mm)	B334
5" (127mm)	B500

### Miscellaneous Options

Description	Specify
Spanner head screws	M02
Torx® head screws	M04
Less cylinder, with tailpiece for Schlage® 6-pin fixed core cylinder (all designs)	M06
Lever to accept 6 or 7-pin SFIC (all designs)	M08
Lever to accept SARGENT® 6-pin fixed core cylinder (all designs)	M09
Rounded corners on latch front	M13
3/4" (19mm) throw fire latch <sup>1</sup>	M16
ANSI wrought strike box	M17
Knurling outside and inside (AZ, NZ, PZ only)	M20 <sup>1</sup>
Knurling outside only (AZ, NZ, PZ only)	M21 <sup>1</sup>
Knurling inside only (AZ, NZ, PZ only)	M22 <sup>1</sup>
Abrasive coat outside and inside (AZ, NZ, PZ only)	M23
Abrasive coat inside only (AZ, NZ, PZ only)	M24
Abrasive coat outside only (AZ, NZ, PZ only)	M25
Lever to accept Schlage® LFIC (AZ, NZ, PZ only)	M69
Rigid outside lever when locked	M200
Less cylinder, with tailpiece for Yale® 6-pin fixed core cylinder (all designs)	YC
Less cylinder, with tailpiece for Yale® 7-pin fixed core cylinder (all designs)	YC7
Lever to accept Yale® 6-pin LFIC (AZ, NZ, PZ only)	YRC

<sup>1</sup> All levers provided in a powder coat finish will be supplied with an abrasive coating

### Strikes

Lip to Center	ANSI Curved Lip Specify	Curved Lip Box Specify
1" (25mm)	SA100	SC100
1-1/8" (29mm)	SA118	SC118
1-1/4" (32mm)	(standard)	SC114
1-3/8" (35mm)	SA138	SC138
1-1/2" (38mm)	SA112	SC112
1-3/4" (44mm)	SA134	SC134
2" (51mm)	SA200	SC200
2-1/4" (57mm)	SA214	SC214
2-1/2" (64mm)	SA212	SC212
2-3/4" (70mm)	SA234	SC234
3" (76mm)	SA300	SC300

### Door Thickness

Description	Specify
1-3/4" (44mm) - 2" (51mm)	(standard)
2" (51mm) - 2-1/4" (57mm)	D214



# Features

## ED5000N IN100 Exit Devices



ED5000 Exit Device  
With 9100 Series Trim

### Features

#### EcoFlex® Technology

Reduces energy consumption by up to 95%

#### Handing

Device is handed but easily field reversible.  
Lever trim is handed.

#### Bar Length

Easily field cut to size.

Standard: 36" (914mm) bar fits 30" - 36" (762mm-914mm) door.

Optional: 24" (610mm) bar fits 24" (610mm) door; specify W024.

Optional: 48" (1219mm) bar fits 36" - 48" (914mm-1219mm) door; specify W048.

#### Door Thickness

1-3/4" (44mm) standard.

Optional: 2" (51mm); specify D200.

Optional: 2-1/4" (57mm); specify D214.

#### Stile

Minimum width 4-1/2" (114mm).

#### Latchbolt

Rim: 3/4" (19mm) throw stainless steel pullman-type latchbolt with stainless steel auxiliary deadlocking latch standard  
SecureBolt: 3/4" (19mm) projection x 1" wide deadbolt-style latchbolt with positive deadlocking by auxiliary bolt  
Mortise: 2-piece mechanical 3/4" throw deadlocking stainless steel latchbolt

#### Monitoring

Request to Exit (Non-Handed)  
Door Position Switch (Supplied and mounted above the lock. Connects directly into the lock's electronics.)

#### Materials

Heavy-duty cold-forged steel chassis; heavy-gauge steel mechanisms, electroplated for corrosion resistance; finished parts are brass, bronze or stainless steel; stainless steel springs; nylon bearings.

#### Projection

3-1/4" (83mm) active, 2-3/4" (70mm) dogged.

#### Dogging

Standard on panic devices; single-point 1/4 turn hex key dogging. Optional: less dogging, specify M51. Optional: cylinder dogging, specify M52. Mechanical dogging not available on fire-rated devices.

#### Fasteners

Standard on panic devices: machine screws and wood door fasteners.

Standard on fire-rated devices: sex nuts and bolts.

Optional on panic devices: sex nuts and bolts for use on wood, composite, or unreinforced metal doors; specify M54.  
Optional wood screws for use on approved fire-rated solid wood or wood core doors. Specify M64.

#### Strike

Optional strikes available; see Options and Accessories, page 17.

#### Cylinders

Cylinder not included unless specified. See Quick Codes, page 17.

#### Shim Kit

Optional for mounting device over raised vision light molding; specify M58.

#### Warranty

Five-year limited.

### Certification/Compliance

#### ANSI/BHMA

Meets A156.3, Type 2, Grade 1.

#### UL /cUL

All devices listed for safety as panic hardware; devices comply with UL 305 standards for panic hardware. Three-hour fire-rated devices listed as fire exit hardware for A label and lesser class 8' x 8' double doors; UL symbol on active case cover indicates listing.

Any retrofit or other field modification to a fire-rated opening can potentially impact the fire rating of the opening, and Corbin Russwin, Inc. makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

#### California State Reference Code

This product has been approved by the California State Fire Marshal pursuant to section 13144.1 of the California Health and Safety Code.

#### NFPA

All exit devices comply with NFPA 101 Life Safety Code. All fire-rated devices comply with NFPA 80 Fire Doors and Windows. ADA Lever trims and pulls comply with Americans with Disabilities Act.

Sold through:



Authorized Channel Partner  
ASSA ABLOY

# How to Order

## ED5000N IN100 Exit Devices

Build your order string:

### Exit Device Only

Series/Function	Finish	Handing	Technology Code	Misc. Options	Door Width
ED5634LN	630	LHR	IN100	M51-M54	W048

### Trim Only

Lever/Function	Finish	Handing	Technology Code	Reader Code	Reader Modifier	Cylinder	Door Thickness
N9M134	630	LHR	IN100	BIPS	B	6P	D214

### Exit Device with Trim

Series Function	Lever Function	Finish	Handing	Technology Code	Reader Code	Reader Modifier	Cylinder	Door Thickness	Door Width
ED5634LN	N9M134	630	LHR	IN100	BIPS	B	6P	D214	W048

Series/Function	Type	Function Description
ED5200(A)N & ED5200S(A)N x 9133	Rim Exit Device No Key Override	<ul style="list-style-type: none"> <li>Latch retracted by inside push pad at all times</li> <li>Outside lever locked (freewheeling) except when in passage mode or valid user code entered</li> </ul>
ED5200(A)N & ED5200S(A)N x 9134	Rim Exit Device With Key Override	<ul style="list-style-type: none"> <li>Latch retracted by inside push pad at all times</li> <li>Outside lever locked (freewheeling) except when in passage mode or valid user code entered</li> <li>Outside cylinder override allows lever to retract latch</li> </ul>
ED5633(A)LN x 9M133	Mortise Exit Device No Key Override	<ul style="list-style-type: none"> <li>Latch retracted by inside push pad at all times</li> <li>Outside lever rigid except when in passage mode or valid user code entered</li> </ul>
ED5634(A)LN x 9M134	Mortise Exit Device With Key Override	<ul style="list-style-type: none"> <li>Latch retracted by inside push pad at all times</li> <li>Outside lever rigid except when in passage mode or valid user code entered</li> <li>Outside cylinder override retracts latch</li> </ul>

Reader Modifier	Description
B	Black reader, black trim
MB	Black reader, metal trim

Note: Metal trim for the reader is supplied in the finish specified in the order string. It is not available in stainless steel (629/630/630C) but will be plated to match.



# How to Order

## ED5000N IN100 Exit Devices

### Finishes

Description	Specify	Description	Specify	Description	Specify
Polished Brass, Clear Coated	605	Polished Nickel	618	Satin Stainless Steel with MicroShield®	630C*
Satin Brass, Clear Coated	606	Satin Nickel	619	Black Oxidized Bronze, Oil Rubbed	722
Polished Bronze, Clear Coated	611	Polished Chrome	625	Black Suede Powder	BSP
Satin Bronze, Clear Coated	612	Satin Chrome	626	White Suede Powder	WSP
Dark Oxidized Satin Bronze, Oil Rubbed	613	Satin Chrome with MicroShield®	626C		
Dark Oxidized Satin Bronze - Equivalent	613E	Bright Stainless Steel	629*		
		Satin Stainless Steel	630*		

\*Metal escutcheon trim (MB and MW) plated to match

### Levers

The levers shown here are some of our most popular styles from the Muséo Collection. To see the complete range of levers, refer to pages 30-32.



102



103



110



124<sup>1</sup>



125<sup>1</sup>



123<sup>1</sup>

### Premium Levers



21M



21S



133



134



136



138

1. Lever returns within 1/2" (13 mm) of door face.



Sold through:



Authorized Channel Partner  
ASSA ABLOY

# Quick Codes

## ED5000N IN100 Exit Devices

### Cylinders and Keying

Description	Specify
Conventional 6-pin	(standard)
Conventional 7-pin	7P
Less Cylinder(s)	LC
<b>LFIC</b>	
LFIC 6-pin	C6
LFIC 6-pin with Temporary Construction Core (Red)	CT6R
LFIC 6-pin with Temporary Construction Core (Blue)	CT6B
LFIC 6-pin with Temporary Construction Core (Green)	CT6G
LFIC 6-pin Less Core	CL6
LFIC 7-pin	C7
LFIC 7-pin with Temporary Construction Core (Red)	CT7R
LFIC 7-pin with Temporary Construction Core (Blue)	CT7B
LFIC 7-pin with Temporary Construction Core (Green)	CT7G
LFIC 7-pin Less Core	CL7
<b>SFIC</b>	
SFIC 6-pin with Less Core	CLS6
SFIC 6-pin with SFIC disposable temporary core	CT6SD
SFIC 7-pin with Less Core	CLS7
SFIC 7-pin with SFIC disposable temporary core	CT7SD
<b>Security</b>	
Security	HS
Security IC	CHS
<b>Access 3®</b>	
Access 3® Patented	AP
Access 3® Security	AS
Access 3® High Security	AHS
Access 3® Patented IC	ACP
Access 3® Security IC	ACS
Access 3® High Security IC	ACHS
<b>Pyramid</b>	
Pyramid Fixed Core	PHS
Pyramid IC	PCHS
Pyramid IC Less Core	CLP
Pyramid with Temporary Construction Core	CTP
Pyramid Security	PS
Pyramid Security IC	PCS
Pyramid Disposable Core	CTPD
<b>Keying and Keys</b>	
6-pin Disposable Core	CT6D
7-pin Disposable Core	CT7D
Keyed Random (Standard)	KR
Construction Master Keyed (not available for Pyramid)	CMK
2 Keys per Cylinder	(standard)
More than 2 Keys	KY# (e.g., KY6)

### Cylinders and Keying (cont.)

Description	Specify
<b>Visual Key Control</b>	
No Keying Data Stamped - on Key or Cylinder	VK00
Keys Only	VK01
Cylinders and Keys (not for HS, CHS, PHS or PCHS)	VK02
Cylinders Only (not for HS, CHS, PHS or PCHS)	VK03
<b>Concealed Key Control (CKC)</b>	
CKC Cylinders with VKC Keys	CK02
CKC Cylinders Only (not for PHS, PCHS)	CK03

### Finish

Description	Specify
Polished Brass, Clear Coated	605
Satin Brass, Clear Coated	606
Polished Bronze, Clear Coated	611
Satin Bronze, Clear Coated	612
Dark Oxidized Satin Bronze, Oil Rubbed	613
Dark Oxidized Satin Bronze - Equivalent	613E
Polished Nickel	618
Satin Nickel	619
Polished Chrome	625
Satin Stainless Steel	629*
Bright Stainless Steel	630*
Satin Stainless Steel with MicroShield®	630C*
Black Oxidized Bronze, Oil Rubbed	722
Black Suede Powder	BSP
White Suede Powder	WSP

\*Metal escutcheon trim (MB) plated to match

### Strikes

Description	Specify
Rim strike S02	S02
Mortise ANSI strike for pairs of doors with astragal	SS078
Open back strike for 1-3/4" doors	SB134
Open back strike for 2-1/4" doors	SB214

### Door Thickness


Door Thickness	Specify
1-3/4" (44mm)	(standard)
2" (51mm)	D200
2-1/4" (57mm)	D214

### Door Width

Door Width	Specify
24" (610mm)	W024
36" (914mm)	(standard)
48" (1219mm)	W048

### Handing

Hand	Specify
Right Hand Reverse	RHR
Left Hand Reverse	LHR



Note: Arrow indicates secure side of door.

### Miscellaneous Options

Description	Specify
Torx® head screws	M04
Windstorm	M107
ANSI wrought strike box	M17
Knurling outside and inside <sup>1</sup>	M20 <sup>2</sup>
Knurling outside only <sup>1</sup>	M21 <sup>2</sup>
Knurling inside only <sup>1</sup>	M22 <sup>2</sup>
Abrasive coat outside and inside <sup>1</sup>	M23
Abrasive coat inside only <sup>1</sup>	M24
Abrasive coat outside only <sup>1</sup>	M25
Less dogging	M51
Cylinder dogging	M52
Sex nuts and bolts (SNBs)	M54
Shim kit (for vision light)	M58
Wood screws for use on fire-rated solid wood or wood core doors	M64

<sup>1</sup> Not available with Vineyard or Museo levers.

<sup>2</sup> All levers provided in a powder coat finish will be supplied with an abrasive coating



# Features

## PED5000 IN100 Exit Devices



PED5000 Exit Device  
With 9100PT Series Trim



### Features

EcoFlex® Technology reduces energy consumption, which lowers operation cost and reduces the number of power supplies required.

#### Handing

Device is handed but easily field reversible. Lever trim is handed.

#### Bar Length

Easily field cut to size.

W032: 24" to 32" (61 cm to 81 cm)

W036: 32.5" to 36" (84 cm to 91 cm)

W042: 36.5" to 42" (94 cm to 107 cm)

W048: 42.5" to 48" (110 cm to 122 cm)

Note: Must specify rail length on order string to receive factory cut rail. (ex: W026 - 26" wide door) Available in 1/8" increments.

#### Door Thickness

1-3/4" (44mm) standard. Specify D134.

Optional: 2" (51mm); specify D200.

Optional: 2-1/4" (57mm); specify D214.

#### Stile

Minimum width 4-1/2" (114mm).

#### Latchbolt

Rim: 3/4" (19mm) throw stainless steel pullman-type latchbolt with stainless steel auxiliary deadlocking latch standard

Mortise: 2-piece mechanical 3/4" throw deadlocking stainless steel latchbolt

Top: 3/4" (19mm) throw, stainless steel pullman-type with automatic deadlatching.

Bottom: 5/8" (16mm) throw deadbolt, held retracted during door swing

#### Monitoring

Request-to-Exit (Non-Handed)

Door Position Switch (DPS)\* (Supplied and mounted above the lock. Connects directly into the lock's electronics.)

#### Materials

Heavy-duty cold-forged steel chassis; heavy-gauge steel mechanisms, electroplated for corrosion resistance; finished parts are brass, bronze or stainless steel; stainless steel springs; nylon bearings.

#### Projection

3.10" (79mm) active, 2.18" (55mm) dogged.

#### Dogging

Standard on panic devices; single-point 1/4 turn hex key dogging. Optional: less dogging, specify M51. Optional: cylinder dogging, specify M52. Mechanical dogging not available on fire-rated devices.

#### Fasteners

Standard on panic devices: machine screws and wood door fasteners.

Standard on fire-rated devices: sex nuts and bolts.

Optional on panic devices: sex nuts and bolts for use on wood, composite, or unreinforced metal doors; specify M54.

#### Strike

Optional strikes available; see Options and Accessories, page 22.

#### Cylinders

Cylinder not included unless specified. See Quick Codes, page 22.

#### Shim Kit

Reference PED5000 catalog for optional shims.

#### Warranty

Ten-year limited mechanical

2-year limited electrical

### Certification/Compliance

#### ANSI

Meets A156.3, Type 2, Grade 1.

#### UL /cUL

All devices listed for safety as panic hardware; devices comply with UL 305 standards for panic hardware. Three-hour fire-rated devices listed as fire exit hardware for A label and lesser class 8' x 8' double doors; UL symbol on active case cover indicates listing.

Any retrofit or other field modification to a fire-rated opening can potentially impact the fire rating of the opening, and Corbin Russwin, Inc. makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

#### California State Reference Code

This product has been approved by the California State Fire Marshal pursuant to section 13144.1 of the California Health and Safety Code.

#### NFPA

All exit devices comply with NFPA 101 Life Safety Code. All fire-rated devices comply with NFPA 80 Fire Doors and Windows. ADA Lever trims and pulls comply with Americans with Disabilities Act.

*\*For Double-door applications the DPS is installed in-between the active and inactive leaves. The DPS monitors both doors, but the REX only monitors the active leaf. To prevent door-force or door-held alarms, the alarms must be disabled.*

Sold through:



Authorized Channel Partner  
ASSA ABLOY

# How to Order

## PED5000 IN100 Exit Devices

Build your order string:

Exit Device with Trim

Series Function	Lever Function	Finish	Handing	Technology Code	Reader Code	Reader Modifier	Cylinder	Door Thickness	Door Width
PED5634	N9M134PT	630	LHR	IN100	BIPS	B	6P	D214	W048



Rim



Surface Vertical Rod  
Ease of Access (EA-Option)



Mortise



Concealed Vertical Rod  
Ease of Access (EA-Option)

Function	Type	Function Description	Trim
PED5233 (A)	PED5233 - IN100 Series Rim Exit Device, No Key Override PED5233A - IN100 Series Rim Exit Device, Fire-Rated, No Key Override	<ul style="list-style-type: none"> <li>Latch retracted by inside push pad at all times</li> <li>Outside lever locked (rigid) except when in passage mode or valid user code entered</li> <li>No Key Override</li> </ul>	8133PT/9133PT
PED5234 (A)	PED5234 - IN100 Series Rim Exit Device, With Key Override PED5234A - IN100 Series Rim Exit Device, Fire-Rated, With Key Override	<ul style="list-style-type: none"> <li>Latch retracted by inside push pad at all times</li> <li>Outside lever locked (rigid) except when in passage mode or valid user code entered</li> <li>Outside cylinder override allows lever to retract latch</li> <li>With Key Override</li> </ul>	8134PT/9134PT
PED5433 (A)	PED5433 - IN100 Series SVR Exit Device, No Key Override PED5433A - IN100 Series SVR Exit Device, Fire-Rated, No Key Override	<ul style="list-style-type: none"> <li>Latch retracted by inside push pad at all times</li> <li>Outside lever locked (rigid) except when in passage mode or valid user code entered</li> <li>No Key Override. EA- Option Required.</li> </ul>	8M133PT/9M133PT
PED5633 (A)	PED5633 - IN100 Series Mortise Exit Device, No Key Override PED5233A - IN100 Series Mortise Exit Device, Fire-Rated, No Key Override	<ul style="list-style-type: none"> <li>Latch retracted by inside push pad at all times</li> <li>Outside lever rigid except when in passage mode or valid user code entered</li> <li>No Key Override</li> </ul>	8M133PT/9M133PT
PED5634 (A)	PED5633 - IN100 Series Mortise Exit Device, No Key Override PED5233A - IN100 Series Mortise Exit Device, Fire-Rated, No Key Override	<ul style="list-style-type: none"> <li>Latch retracted by inside push pad at all times</li> <li>Outside lever rigid except when in passage mode or valid user code entered</li> <li>With Key Override</li> </ul>	8M134PT/9M134PT
PED5833 (A)	PED5833 - IN100 Series CVR Exit Device, No Key Override PED5833A - IN100 Series CVR Exit Device, Fire-Rated, No Key Override	<ul style="list-style-type: none"> <li>Latch retracted by inside push pad at all times</li> <li>Outside lever rigid except when in passage mode or valid user code entered</li> <li>No Key Override. EA- Option Required.</li> </ul>	8CV133PT/9CV133PT



# How to Order

## PED5000 IN100 Exit Devices

Reader Modifier	Description
B	Black reader, black trim
MB	Black reader, metal trim

Reader Code	Credentials
BIPS	HID Prox®, iCLASS®, iCLASS SE®, iCLASS® Seos®, SIO on MIFARE® Classic, SIO on MIFARE DESFire® EV1 MIFARE Classic, MIFARE DESFire EV1, HID Mobile Access, Apple Wallet, Google Pay

Note: Metal trim for the reader is supplied in the finish specified in the order string. It is not available in stainless steel (629/630/630C) but will be plated to match.

Sold through:



Authorized Channel Partner  
ASSA ABLOY

# How to Order

## PED5000 IN100 Exit Devices

### Trim Finishes

Description	Specify	Description	Specify	Description	Specify
Polished Brass, Clear Coated	605	Polished Nickel	618	Satin Stainless Steel with MicroShield®	630C*
Satin Brass, Clear Coated	606	Satin Nickel	619	Black Suede Powder	BSP
Polished Bronze, Clear Coated	611	Satin Nickel with Microshield®	619C	White Suede Powder	WSP
Satin Bronze, Clear Coated	612	Polished Chrome	625	*Metal escutcheon trim (MB) plated to match	
Dark Oxidized Satin Bronze, Oil Rubbed	613	Satin Chrome	626		
Dark Oxidized Satin Bronze - Equivalent	613E	Satin Chrome with MicroShield®	626C		
Oxidized satin, bronze, clear coated	613L	Bright Stainless Steel	629*		
		Satin Stainless Steel	630*		

### Levers

The levers shown here are some of our most popular styles from the Muséo Collection. To see the complete range of levers, refer to pages 30-33.



102



103



110



124<sup>1</sup>



125<sup>1</sup>



123<sup>1</sup>

### Premium Levers



21M



21S



133



134<sup>1</sup>



136



138<sup>1</sup>

1. Lever returns within 1/2" (13 mm) of door face.



# Quick Codes

## PED5000 IN100 Exit Devices

### Cylinders and Keying

Description	Specify
Conventional 6-pin	(standard)
Conventional 7-pin	7P
Less Cylinder(s)	LC
<b>LFIC</b>	
LFIC 6-pin	C6
LFIC 6-pin with Temporary Construction Core (Red)	CT6R
LFIC 6-pin with Temporary Construction Core (Blue)	CT6B
LFIC 6-pin with Temporary Construction Core (Green)	CT6G
LFIC 6-pin Less Core	CL6
LFIC 7-pin	C7
LFIC 7-pin with Temporary Construction Core (Red)	CT7R
LFIC 7-pin with Temporary Construction Core (Blue)	CT7B
LFIC 7-pin with Temporary Construction Core (Green)	CT7G
LFIC 7-pin Less Core	CL7
<b>SFIC</b>	
SFIC 6-pin with Less Core	CLS6
SFIC 6-pin with SFIC disposable temporary core	CT6SD
SFIC 7-pin with Less Core	CLS7
SFIC 7-pin with SFIC disposable temporary core	CT7SD
<b>Security</b>	
Security	HS
Security IC	CHS
<b>Access 3®</b>	
Access 3® Patented	AP
Access 3® Security	AS
Access 3® High Security	AHS
Access 3® Patented IC	ACP
Access 3® Security IC	ACS
Access 3® High Security IC	ACHS
<b>Pyramid</b>	
Pyramid Fixed Core	PHS
Pyramid IC	PCHS
Pyramid IC Less Core	CLP
Pyramid with Temporary Construction Core	CTP
Pyramid Security	PS
Pyramid Security IC	PCS
Pyramid Disposable Core	CTPD
<b>UL Housing</b>	
UL LFIC 6-pin housing less core	CL6AH
UL LFIC 6-pin housing w/ disposable core	CTAHD
UL LFIC 6-pin w/ temporary construction core (red)	CT6AHR
UL LFIC 6-pin w/ temporary construction core (blue)	CT6AHB
UL LFIC 6-pin w/ temporary construction core (green)	CT6AHG

### Cylinders and Keying (Cont.)

Description	Specify
<b>Keying and Keys</b>	
6-pin Disposable Core	CT6D
7-pin Disposable Core	CT7D
Keyed Random (Standard)	KR
Construction Master Keyed (not available for Pyramid)	CMK
2 Keys per Cylinder	(standard)
More than 2 Keys	KY# (e.g., KY6)
<b>Visual Key Control</b>	
No Keying Data Stamped on Key or Cylinder	VKC0
Keys Only	VKC1
Cylinders and Keys (not for HS, CHS, PHS or PCHS)	VKC2
Cylinders Only (not for HS, CHS, PHS or PCHS)	VKC3
<b>Concealed Key Control (CKC)</b>	
CKC Cylinders with VKC Keys	CKC2
CKC Cylinders Only (not for PHS, PCHS)	CKC3

### Exit Device Finishes

Description	Specify
Polished Brass, Clear Coated	605
Satin Brass, Clear Coated	606
Polished Bronze, Clear Coated	611
Satin Bronze, Clear Coated	612
Dark Oxidized Satin Bronze, Oil Rubbed	613
Dark Oxidized Satin Bronze - Equivalent	613E
Oxidized Satin, Bronze, Clear Coated	613L
Satin Stainless Steel	629*
Bright Stainless Steel	630*
Satin Stainless Steel with Micro-Shield®	630C*
Black Suede Powder Coat	BSP
White Suede Powder Coat	WSP

Note; Mixed finishes available please see PED5000 Series Catalog

\*Metal escutcheon trim (MB) plated to match

### Strikes

Description	Specify
Half mortised strike	613
Mortised strike	642
Door pairs w/o mullion	644
Surface strike	649
Blade Stop Strike	657
Mullion Strike	658
Curved Lip Strike	C908
Open Back Strike	815
Flat lip strike	908

### Door Thickness

Door Thickness	Specify
1-3/4" (44mm)	D134 (standard)
2" (51mm)	D200
2-1/4" (57mm)	D214


### Door Width

Inches		Fractions	
Code	Measurement	Code	Measurement
W024	24"	1	1/8"
W025	25"	2	1/4"
W026	26"	3	3/8"
W027	27"	4	1/2"
W028	28"	5	5/8"
W029	29"	6	3/4"
W030	30"	7	7/8"
W031	31"		
W032	32"		
W033	33"		
W034	34"		
W035	35"		
W036	36"		
W037	37"		
W038	38"		
W039	39"		
W040	40"		
W041	41"		
W042	42"		
W043	43"		
W044	44"		
W045	45"		
W046	46"		
W047	47"		
W048	48"		

Note; Reference PED5000 catalog for door width example.

### Handing

Hand	Specify
Right Hand Reverse	RHR
Left Hand Reverse	LHR



Note: Arrow (↔) indicates secure side of door.

### Miscellaneous Options

Description	Specify
Security Fasteners	M04
Milled Outside Lever	M21 <sup>1</sup>
Abrasive Strip on Rail & Abrasive Coating on Outside Lever	M23
Abrasive Coating on Outside Lever	M24
Abrasive Strip on Rail	M25
Passage Dogging Indicator	M48
Less dogging	M51
Cylinder dogging	M52
Thrubolts	M54
Windstorm	M107
Ease of Access (Required for PED5400 and PED5800)	EA

1 Not available with Muséo levers.

Sold through:



Authorized Channel Partner  
ASSA ABLOY

# Features

## Von Duprin 98/99 Series Rim Exit Devices



### Mechanical Features

Certified ANSI/BHMA A156.3 Grade 1.

Key override compatible with a variety of rim cylinders. Trim prepped for cylinder (not included).

Requires Von Duprin RX switch assembly #050251-00 (supplied by others).

Provides complete coverage of door prep for Von Duprin 996 trim; call 800-810-WIRE for information on door prep coverage for other trims.

Available with Muséo Line, Vineyard Collection and all standard levers.

UL/ULC Listed for fire doors\*

Matching dummy trim available for double doors.

### IN Series Exit Device Functions

Lever outside rigid except when in passage mode or valid user code entered.

Always allows free egress.

Request-to-Exit (REX): monitors rail position

Low battery, tamper signaling standard.

Door position switch (DPS, part #820F609) supplied.

\* Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and Sargent Manufacturing Company makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

Select from the following options to order IN Series multi-point locks:

Technology	Function
IN100 Aperio wireless	231 Rim exit device, key override

Reader Modifier	Description
B	Black reader, black trim
MB	Black reader, metal trim

Note: Metal trim for the reader is supplied in the finish specified in the order string. It is not available in stainless steel (629/630/630C) but will be plated to match.

### Escutcheon


CREK1	Trim for Von Duprin Retrofit Fit
-------	----------------------------------

### Lever

The levers shown here are some of our most popular styles from the Muséo Line. To see the complete range of available levers, refer to pages 30-31.



### Premium Levers

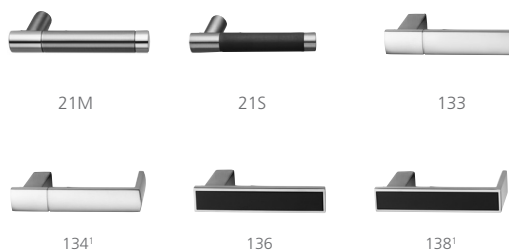

1. Lever returns within 1/2" (13 mm) of door face.



# How to Order

## Von Duprin 98/99 Series Rim Exit Devices


### Finishes

Description	Specify	Description	Specify	Description	Specify
Polished Brass, Clear Coated	605	Polished Nickel	618	Satin Stainless Steel with MicroShield®	630C*
Satin Brass, Clear Coated	606	Satin Nickel	619	Black Oxidized Bronze, Oil Rubbed	722
Polished Bronze, Clear Coated	611	Polished Chrome	625	Black Suede Powder	BSP
Satin Bronze, Clear Coated	612	Satin Chrome	626	White Suede Powder	WSP
Dark Oxidized Satin Bronze, Oil Rubbed	613	Satin Chrome with MicroShield®	626C		
Dark Oxidized Satin Bronze - Equivalent	613E	Bright Stainless Steel	629*		
		Satin Stainless Steel	630*		

\*Metal escutcheon trim (MB) plated to match

### Handing

Hand	Specify
Right Hand Reverse	RHR
Left Hand Reverse	LHR



Note: Arrow indicates secure side of door.

### Build your order string:

				Required Options				Other Options
Function	Trim	Finish	Handing	Technology Code	Reader Code	Escutcheon	Reader Modifier	Cylinder, Strike, Door Thickness
231	102	605	RHR	IN100	BIPS	CREK1	B	—

For finish, additional cylinder, and/or mechanical options, please refer to page 13.

1. Lever returns within 1/2" (13 mm) of door face.
2. Gramercy levers are customized. See page 31 for ordering information



Sold through:



Authorized Channel Partner  
ASSA ABLOY

# Features

## BL6600/FE6600/MP6600 Series Multi-Point Locks



### Features

#### Handing

Handed; quick reversibility. The lockset can be re-handed without disassembling the lock body.

#### Door Thickness

1-3/4" thick door only; fully integrated – 6600 is part of a complete ASSA ABLOY windstorm solution

#### Backset

2-3/4" (70mm).

#### Lockcase

Heavy-gauge chrome plated steel, 5-7/8" (149mm) x 4" (102mm) x 15/16" (24mm).

#### Front

Heavy-gauge steel, 8" (203mm) x 1-1/4" (32mm) x 3/32" (2mm). Accommodates non-beveled and beveled doors 1/8" (3mm) in 2" (51mm).

#### Armored Front

Wrought brass, bronze or stainless steel attached by machine screws to lockcase front.

#### Device Type

Available with both BL (Blast) and FE (FEMA) prefixes

#### Top Bolt

Adjustable stainless steel 3/4" square bolt with 11/16" engagement; 5/16" steel reinforcement plate

#### Installation

Concealed vertical assembly (rods, latches and cassette) pre-installed in door

#### Bottom Bolt

Adjustable stainless steel 3/4" square bolt with 5/8" engagement; 1/4" steel reinforcement plate

#### Center Bolts

Latchbolt is stainless steel with 3/4" projection. One piece, anti-friction reversible catch. Deadbolt is one piece hardened stainless steel with 1" projection

#### Lock Front

1/8" steel mortise front reinforced with 13/64" thick lock edge stiffener

#### Center Bolt Strike

1/4" thick stainless steel

#### Backset

2-3/4" standard

#### Door Thickness

1-3/4" standard

#### Door Height

7'0" - 8'0"

#### Maximum Opening

Single door 4'0" x 8'0" and double doors 8'0" x 8'0"

#### Strike

Wrought brass, bronze or stainless steel ANSI straight lip standard, 4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/8" (29mm) lip to center.

#### Environmental Specifications

##### Operating Temperature:

-13°F (-25°C) to 151°F (66°C)

##### Operating humidity:

Operates in condensing environments

\*always refer to the installation instructions for correct procedure when installing in condensing environments

#### Monitoring

- Deadbolt
- Latch bolt
- DPS integrated into lock body
- Request to exit

#### Warranty

7-year limited mechanical.  
2-year limited electrical.

#### Shipping Weight

Approx. 11 lbs.

### Certification/Compliance

#### ANSI/BHMA

Meets A156.37, Operational Grade 1 and Security Grade 1 requirements.

Meets A117.1 Accessibility Code.

Meets A156.25 requirements.

#### UL /ULC-UL10C Positive Pressure

All locks listed for A label and lesser class doors, 4' (122cm) x 8' (305cm) single or 8' (244cm) x 8' (305cm) pair. Letter F and UL symbol on armored front indicate listing.

#### Windstorm Certification

Windstorm certification information is listed in the Corbin Russwin 6600 Series catalog.

Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and Corbin Russwin, Inc. makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.



# How to Order

## BL6600/FE6600/MP6600 Series Multi-Point Locks

### Build your order string:

Function	Trim	Finish	Handing	Required Options			Other Options
				Technology Code	Reader Code	Reader Modifier	
66135	---	---	---	IN100	BIPS	--	----

For finish, additional cylinder, and/or mechanical options, please refer to page 13.

Series/Function	Type	Function Description
BL/FE/MP66135 <b>No Key Override With Deadbolt!</b>	Entry	<ul style="list-style-type: none"> <li>• Deadlocking latch</li> <li>• Latch and deadbolt retracted by inside lever at all times</li> <li>• Outside lever rigid except when in "passage" mode or valid user code entered</li> </ul>
BL/FE/MP66136 Key Override With Deadbolt	Entry With Deadbolt	<ul style="list-style-type: none"> <li>• Key outside retracts deadbolt. Key outside also retracts latch and unlocks outside when trim is locked electronically</li> <li>• Top and bottom rods retracted by lever</li> <li>• Deadbolt projected and retracted by thumbturn or key</li> </ul>

Reader Modifier	Description
B	Black reader, black trim
MB	Black reader, metal trim

Note: Metal trim for the reader is supplied in the finish specified in the order string. It is not available in stainless steel (629/630/630C) but will be plated to match.

### Finishes

Description	Specify	Description	Specify	Description	Specify
Polished Brass, Clear Coated	605	Polished Nickel	618	Satin Stainless Steel	629*
Satin Brass, Clear Coated	606	Satin Nickel	619	Bright Stainless Steel	630*
Polished Bronze, Clear Coated	611	Polished Chrome	625	Satin Stainless Steel with MicroShield®	630C*
Satin Bronze, Clear Coated	612	Satin Chrome	626	Black Suede Powder Coat	BSP
Dark Oxidized Satin Bronze, Oil Rubbed	613	Satin Chrome with MicroShield®	626C	White Suede Powder Coat	WSP
Dark Oxidized Satin Bronze - Equivalent	613E	Black Oxidized Bronze, Oil Rubbed	722		

\*Metal escutcheon trim (MB and MW) plated to match

Sold through:



Authorized Channel Partner  
ASSA ABLOY

# How to Order

## BL6600/FE6600/MP6600 Series Multi-Point Locks

### Roses


The roses shown are some of our most popular styles. To see the complete list of available roses, refer to pages 33.



T



X



E2



E3



E4<sup>1</sup>

### Levers

The levers shown here are some of our most popular styles from the Muséo Collection. To see the complete range of levers, refer to pages 30-31.



102



103



110



124<sup>2</sup>



125<sup>2</sup>



123<sup>2</sup>

### Premium Levers



21M



21S



133



134<sup>2</sup>



136



138<sup>2</sup>

<sup>1</sup> Rose design suites with IN100 reader.  
<sup>2</sup> Lever returns within 1/2" (13 mm) of door face.

### Miscellaneous Options

Description	Specify
Torx® head screws	M04
ANSI wrought strike box	M17
Knurling outside and inside <sup>1</sup>	M20 <sup>2</sup>
Knurling outside only <sup>1</sup>	M21 <sup>2</sup>
Knurling inside only <sup>1</sup>	M22 <sup>2</sup>
Abrasive coat outside and inside <sup>1</sup>	M23
Abrasive coat inside only <sup>1</sup>	M24
Abrasive coat outside only <sup>1</sup>	M25


<sup>1</sup> Not available with Vineyard or Museo levers.  
<sup>2</sup> All levers provided in a powder coat finish will be supplied with an abrasive coating

### Thumbturns

Description	Specify
Decorative	MT1
Decorative Square	MT2
Decorative Cylinder	MT2

### Handing

Hand	Specify
Right Hand	RH
Left Hand	LH
Right Hand Reverse	RHR
Left Hand Reverse	LHR

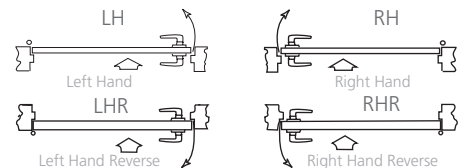

Note: Arrow indicates secure side of door.



# Alternate Power Options

## Aperio® Configuration Kits

### Alternate Power Options

#### Hard Power Option (M35)

The Hard Power Option (Quick Code M35) is recommended for high traffic doors or openings that require online behavior. Corbin Russwin offers a range of power supplies suitable for this application.

#### Operation

Power supplies are designed to provide reliable filtered and regulated power for long life to a variety of electrified hardware components. All modular power supplies are designed to meet UL 1481 Standards.

#### Features

- Fire panel emergency release input
- PC Board mounted system LED indicator
- Regulated and filtered with input and output protection
- Fused line voltage input with one, four, or eight DC outputs (depending on model)
- Battery charging is provided from a separate output terminal

#### Electrical Specifications

- Inputs: 115VAC @600mA
- Outputs: 12/24 VDC (Current based on model), Filtered and regulated output

#### Listings

- UL & cUL listed 1012 General Purpose Power Supply
- Fire & Burglar Alarm Power Supply Unit URT2
- Releasing device Accessory SYSW
- Access Control Systems Units ALVY
- Burglar Alarm Systems Power Supply APHY

Model	Description
BPS-24-1	Power supply 1.0 amp @ 24 VDC output
BPS-24-2	Power supply 2 amp @ 24 VDC output
BPS-24-4	Power supply 4 amp @ 24 VDC output
BPS-12-1	Power supply 1 amp @ 12 VDC output
BPS-12-3	Power supply 3 amp @ 12 VDC output

ElectroLynx® hinges and harnesses required for hard-powered IN100 applications are available through McKINNEY.

#### 784F199 Hard Power Kit

- Included with M35 option IN100 units
- Allows for hard powering (M35) of IN100
- Compatible with ElectroLynx® system

### Aperio Configuration Kits

Aperio offers the flexibility to make field configurations easily and without any special equipment. Configuration adjustments can be made to the Aperio hub and Aperio locks using the Aperio Programming tool software and Aperio USB programing dongle from a Windows netbook or laptop with an available USB port.

- Requirements for Operation:
  - Laptop or Netbook with:
    - Windows 10
    - USB 2.0 port
- APA-10-PC Aperio Programming Application Tool Kit
  - USB Flash Drive
  - Programming Application Tool Software and License Files
  - Aperio Instructions (electronic files)
  - Trittech Tribee USB Radio Dongle (APD-10-USB)
  - HID iCLASS/Prox Card
- APD-10-USB Aperio Configuration USB Dongle
  - Trittech Tribee USB Radio Dongle
  - Included in APA-10-PC Kit
- 783F909 USB cable
  - USB cable is a stand-alone item (sold separately)

### Integration Tools for ASSA ABLOY Locks

ASSA ABLOY electronic access control locks integrate with a range of industry leading access control systems. For more information on which systems support our Aperio enabled locks, please contact your local ASSA ABLOY Door Security Solutions office, [www.assaabloydss.com](http://www.assaabloydss.com). To learn more about how to integrate these and other ASSA ABLOY products with your system, please call 800-810-WIRE.

Sold through:



Authorized Channel Partner  
ASSA ABLOY

# Options & Accessories

## IN100 Aperio® Wireless Access Control

### Aperio™ Hub



The Aperio hub is available in a Mercury version for completely seamless integration into Mercury-based access control systems. Please contact your Mercury-based access control provider for ordering information.



The IN100 lock uses short distance wireless transmission (IEEE 802.15.4, 2.4 GHz) to communicate with an Aperio hub, which is connected to an access control system via IP, RS-485 or Wiegand.

#### Specifications:

- Wireless Communication: IEEE 802.15.4 (2.4 GHz)
- Wireless Range: 50-80 feet (depending on installed environment)
- EAC Communication: IP, RS-485 or Wiegand
- Power: Powered using Power over Ethernet (PoE) or external power supply (8-24VDC)
- Security: AES 128 encryption
- Operating Temperature: 41°F (5 °C) to 95°F (35 °C)
- Humidity: < 95% maximum (non-condensing)

#### Ordering Aperio Hubs

SERIES	HARDWARE VERSION	HARDWARE CONFIGURATION	CONFIGURATION CODE*
AH	20: Wiegand hub; 30: RS-485 hub; 40: IP hub	W14: Wiegand 1:1; R12: RS-485 1:8 (Mercury); or 1:16 (non-Mercury) IN2: IP 1:64	NNNN
Ex.: AH	30	R12	NNNN

\* NNNN is the standard configuration code for Aperio hubs. Access Control Partners should contact 800-810-WIRE for specific ordering information

#### Aperio Hub Accessories:

- EXT-10-ANT Aperio External Antenna
- Aperio hubs are certified for use with the ASSA ABLOY external (omni-directional) antenna EXT-10-ANT. The external antenna may be used to obtain more even radio coverage (in the form of a doughnut) around the hub. Please note that the antenna does not extend the maximum range of the Aperio hub.








#### Specifications:

- For indoor use only
- Operating Temperature: 32°F (0 °C) to 113°F (45 °C)
- Humidity: < 95% maximum (non-condensing)



# Available Trim Options

## IN100 Mortise Locks and Exit Devices

Standard	Lever	A Rose	B Rose	F Rose		
	Armstrong	ASA	ASB	ASF		
	Newport	NSA	NSB	NSF		
	Princeton	PSA	PSB	PSF		
	Citation	CSA	CSB	CSF		
	Dirke	DSA	DSB	DSF		
	Essex	ESA	ESB	ESF		
	Lustra	LSA	LSB	LSF		
	Regis	RSA	RSB	RSF		
					Armstrong	Citation
					Dirke	Essex*
					Lustra	Newport*
					Princeton*	Regis
Vineyard™		G Rose				
	Frascati	FSG				
	Merlot	MSG				
	Zinfandel	ZSG				
					Frascati	Merlot
					Zinfandel	

Sold through:

















































Authorized Channel Partner  
ASSA ABLOY

# Available Trim Options

## IN100 Mortise Locks and Exit Devices

### The Muséo® Line

Josef						
	133	134	135	136	137 <sup>1</sup>	138 <sup>1</sup>
Georges						
	139	140 (Handed)	143			
Georgia						
	102	103	104 <sup>2</sup>	124 <sup>1</sup>	125 <sup>1</sup>	
Salvador						
	106	107	108	109	110	123 <sup>1</sup>
						
	128 <sup>1</sup>					
Marc <sup>2</sup>						
	111	112	114	115	116	
						
	131 <sup>1</sup>	151				
Laszlo						
	147	148	149	150		
Jackson <sup>2</sup>						
	105	117	119	121	126 <sup>1</sup>	152
Piet*						
	21L	21G	21M	21S	23M	25M
						
	27M					

1. Complies with codes requiring lever to return to within 1/2" (13mm) of door face.

2. Not available in 32D or 32 finish.

Note: 135-138 levers contain white or black polycarbonate insert.

\*Piet levers are customized. See "How to Order" on page 32 for ordering information.



# Available Trim Options & Finishes

## IN100 Mortise Locks



Grooved Insert  
21G



Leather Insert  
21L



Polished with Satin  
Insert  
21M



Santoprene™  
Insert  
21S



With Raised Band  
23M



Plain  
25M



Plain with Two  
Grooves  
27M

### Piet Finish Codes

Finish	Piet Code*	Description
630	30	Satin Stainless Steel
629	29	Bright Stainless Steel
613E	3E	Dark Oxidized Satin Bronze, Equivalent
BSP	BS	Black Suede Powder Coat
WSP	WS	White Suede Powder Coat
N/A	BK	Black (Santoprene™ or leather insert)
N/A	BN	Brown (leather insert)
N/A	00	No Insert

\*Code used to specify Piet Collection finishes only. Use available finishes list to specify desired finish when ordering.

### Piet Lever Descriptions & Available Finishes

Lever Designation	Lever Description	Available Finishes (as ordered)
21G	Grooved Insert	303030, 292929, 293029, 302930, 3E003E, BS00BS OR WS00WS
21L	Leather Insert	30BK30, 30BN30, 29BK29, 29BN29, 3EBK3E, BSBKBS, WSBKWS, 3EBN3E, BSNBS OR WSNWS
21M	Metallic Insert	293029**
21S	Santoprene Insert	30BK30, 29BK29, 3E003E, BS00BS or WS00WS
23M	Raised Band	290030, 290029, 300030, 3E003E, BS00BS OR WS00WS
25M	Plain	290029, 300030, 3E003E, BS00BS or WS00WS
27M	Two Grooves	290029, 300030, 3E003E, BS00BS or WS00WS

\*\*Two-tone finish - grip of lever is 630, balance of lever is 629. Rose/escutcheon and lock finish will be 629.

### Ordering Examples

Rose Options: E2, E3, E4, T, U, V, W, X, Y

Quantity	Series/ Function	Trim	Lever Finish	Lock Finish	Hand	Thumbturn Options
2	ML20134	21LU	29BK29	629	RH	MT3
1	ML20136	23ME3	290030	629	RH	MT3



Sold through:




Authorized Channel Partner  
ASSA ABLOY

# How to Order the Muséo® Piet Levers


## IN100 Mortise Locks

### The Muséo® Line Roses<sup>1</sup>

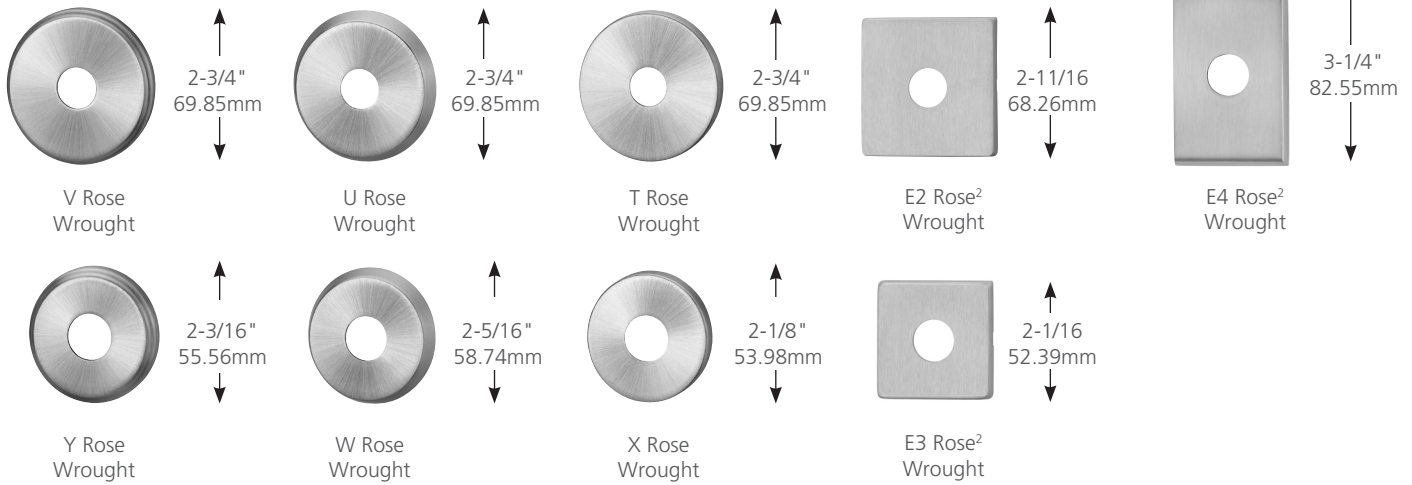

### Thumbturns<sup>3</sup>


Specify quick code MT1, MT2, or MT3 for decorative turns. Standard thumbturn will be supplied without quick code.

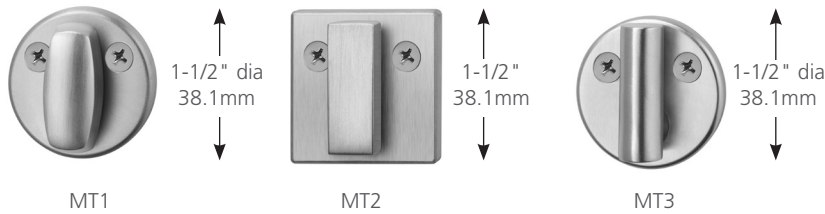

#### Notes:

1. Roses only available with Muséo levers.
2. Square cylinder collar and thumbturn back-plate automatically supplied with E2, E3, and E4 roses.
3. Thumbturn back plate will match shape of rose chosen (i.e. round or square).

### Finishes

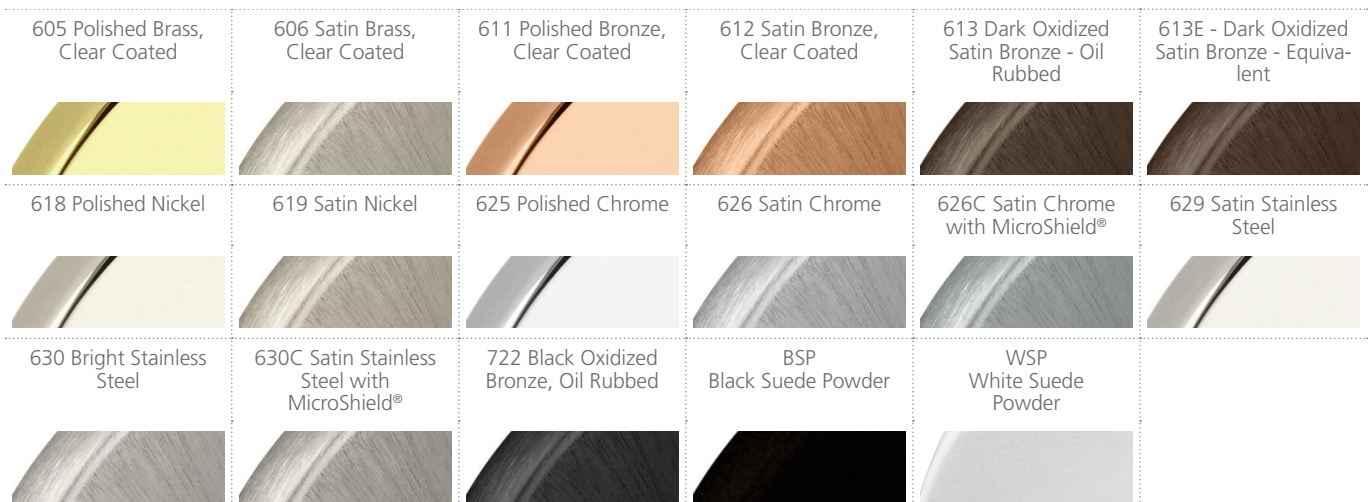



# Common Replacement Parts

## IN100 Mortise Locks

Catalog Number	Color
Outside Escutcheon (Reader), Controller & Inside Mounting Kit	
IN-100-CREM01-BIPS-B	Black
IN-100-CREM01-BIPS-MB [finish]**	Black with metal trim

Catalog Number	Description	Color
Inside Escutcheon (Battery Cover)		
820F489	Inside escutcheon	Black
820F525 [finish]**	Inside escutcheon	Black with metal trim

Catalog Number	Description
820F609	IN100 door position switch
IN-100-CREM04	Inside mounting kit (mounting plate and hardware)
783F909	USB cable, 10 ft.

Catalog Number	Description
Lock Bodies	
784F848 [handing]* 26D	IN100 ML20133/ML20134 Mortise lock, no deadbolt
885F980	IN100 CLX33134 Cylindrical lock, freewheeling lever (1-3/8" - 2-1/4" door)
885F990	IN100 CLX33134 Cylindrical lock, rigid lever (1-3/8" - 2-1/4" door)
816F048 [handing]*26D	ML20233/ML20234 Lock Case - No Deadbolt
816F058 [handing]*26D	ML20235/ML20236 Lock Case - With Deadbolt

Catalog Number	Description
Exit Device Replacement Parts	
N9133 [handing]* [finish]** IN100	Rim exit trim without cylinder
N9134 [handing]* [finish]** IN100	Rim exit trim with cylinder
N9M133 [handing]* [finish]** IN100	Mortise exit trim without cylinder
N9M134 [handing]* [finish]** IN100	Mortise exit trim without cylinder

\*Replace with handing (L, LR, R, RR)

\*\* Select from finishes on previous page

## Cover Plate Kits

Description	Part Number
IN Series mortise lock, ML20133/ML20233 (no key override, no deadbolt)	784F137 32D
IN Series mortise lock, ML20134/ML20234 (key override, no deadbolt)	784F147 32D
IN Series mortise lock, ML20235 (no key override, with deadbolt)	784F157 32D
IN Series mortise lock, ML20236 (key override, with deadbolt)	784F167 32D
IN Series cylindrical lock, CLX33134 (with key override)	784F177 32D

Sold through:



Authorized Channel Partner  
ASSA ABLOY

# Notes

## IN100 Mortise Locks

The ASSA ABLOY Group is the global leader in access solutions. Every day, we help billions of people experience a more open world.

ASSA ABLOY Opening Solutions leads the development within door openings and products for access solutions in homes, businesses and institutions. Our offering includes doors, frames, door and window hardware, mechanical and smart locks, access control and service.



For additional information, contact your  
ASSA ABLOY Door Security Solutions  
sales consultant or visit [www.corbinrusswin.com](http://www.corbinrusswin.com).

In U.S.  
Corbin Russwin  
225 Episcopal Road  
Berlin, CT 06037  
Phone: 800-543-3658  
Fax: 800-447-6714  
[www.corbinrusswin.com](http://www.corbinrusswin.com)

In Canada  
ASSA ABLOY Door  
Security Solutions Canada  
160 Four Valley Drive  
Vaughan, Ontario  
Canada L4K 4T9  
Phone: 800-461-3007  
Fax: 800-461-8989  
[www.assaabloydss.ca](http://www.assaabloydss.ca)

MicroShield®  
As part of their promise to provide innovative solutions to their customers, certain ASSA ABLOY Group brands offer the MicroShield® technology, a silver-based antimicrobial coating designed to inhibit the growth of bacteria.

Microshield® is a registered trademark of ASSA ABLOY Access and Egress Hardware Group, Inc.



The Agion antimicrobial is not intended as a substitute for good hygiene. Coated products must still be cleaned to ensure the surfaces will be free of destructive microbes. ASSA ABLOY makes no representations or warranties, express or implied, as to the efficacy of the Agion antimicrobial. A copy of the Agion warranty is available upon request. Agion is a registered trademark of Agion Technologies, Inc., Wakefield, MA, USA