


**Notes:**

1. Backset is measured from centerline of bevel which is centerpoint of door thickness.
2. (\*) When preparing doors for lead wrapped locks, add 1/8 (3.2) to dimensions marked (\*) to allow proper clearance.
3. 1-1/8 (28.6) strike lip suits frame for 1-3/4 (44.5) thick door, lip will vary for other door thicknesses.
4. For preparation of security trim, refer to T30573.
5. Dimensions given in inches and (mm).

Series Function	Required Holes			
	A	B	C	D
ML2010HS, ML2210HS				
ML2013HS, ML2213HS	●		●	
ML2020HS, ML2220HS				●
ML2022HS, ML2222HS		●		
ML2024HS, ML2224HS	●		●	
ML2029HS, ML2229HS	●			
ML2030HS, ML2230HS				●
ML2032HS, ML2232HS, ML2042HS, ML2242HS, ML2072HS		●		
ML2048HS, ML2248HS	●		●	
ML2051HS, ML2251HS, ML2055HS, ML2255HS, ML2057HS, ML2257HS	●			
ML2060HS, ML2260HS				●
ML2065HS, ML2265HS, ML2067HS, ML2267HS, ML2069HS, ML2269HS, ML2075HS	●		●	

**CAUTION: DOOR & FRAME MANUFACTURERS**  
When door gasketing or silencers are used, proper allowances must be made for strike location to maintain a common centerline with lock and door as shown so that bolt will freely enter strike.

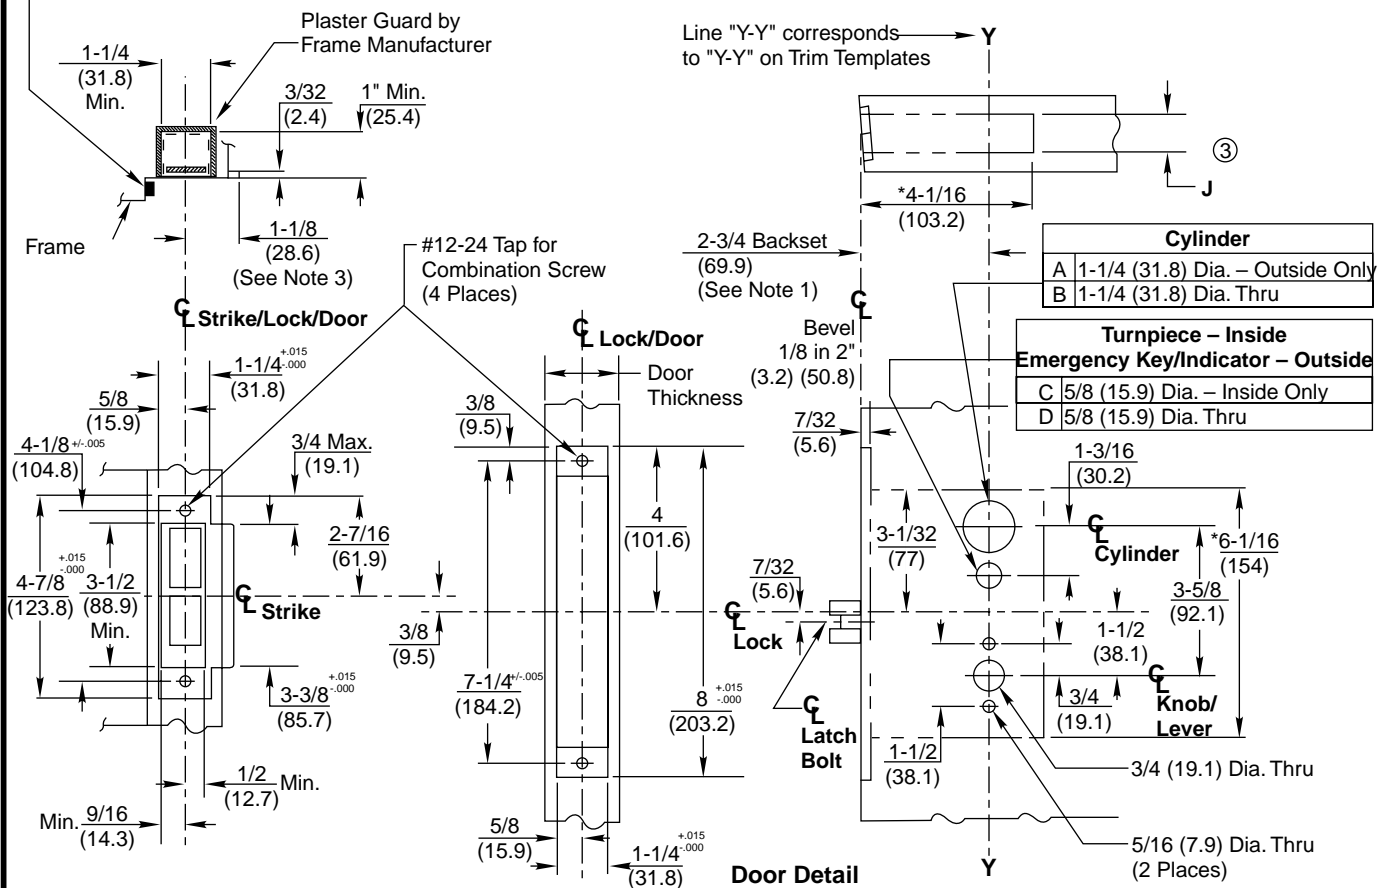

FRAME DETAIL	
ANSI Strike	Description
236L72	Latch & Dead Bolt Holes
236L73	Latch Bolt Hole Only
236L74	Dead Bolt Hole Only
And Optional Box 120F76	

G	H	J	Door Thickness
1-1/4 (31.8)	5/8 (15.9)	1-1/16 (27)	1-3/4 Min. (44.5) Standard
1-1/16 (27)	17/32 (13.5)	1-1/32 (26.2)	1-3/8 Min. (34.9) Optional

Tolerances	
Inches	(mm)
.005	(.127)
.015	(.381)

**RESPONSIBILITY**

Door and Frame Manufacturers are responsible for providing adequate construction or reinforcements for proper installation of hardware shown. All architectural builders hardware must be installed on properly reinforced doors and frames, regardless of the type, material, or method of construction.

**ML2000HS / ML2200HS Series**

**High Security Mortise Lock**



www.corbinrusswin.com

Do Not Scale Drawing

Supersedes T30604-2 | Dr. | App.

Date 7-03 | Template Number T30604-3