



# Installation Instructions

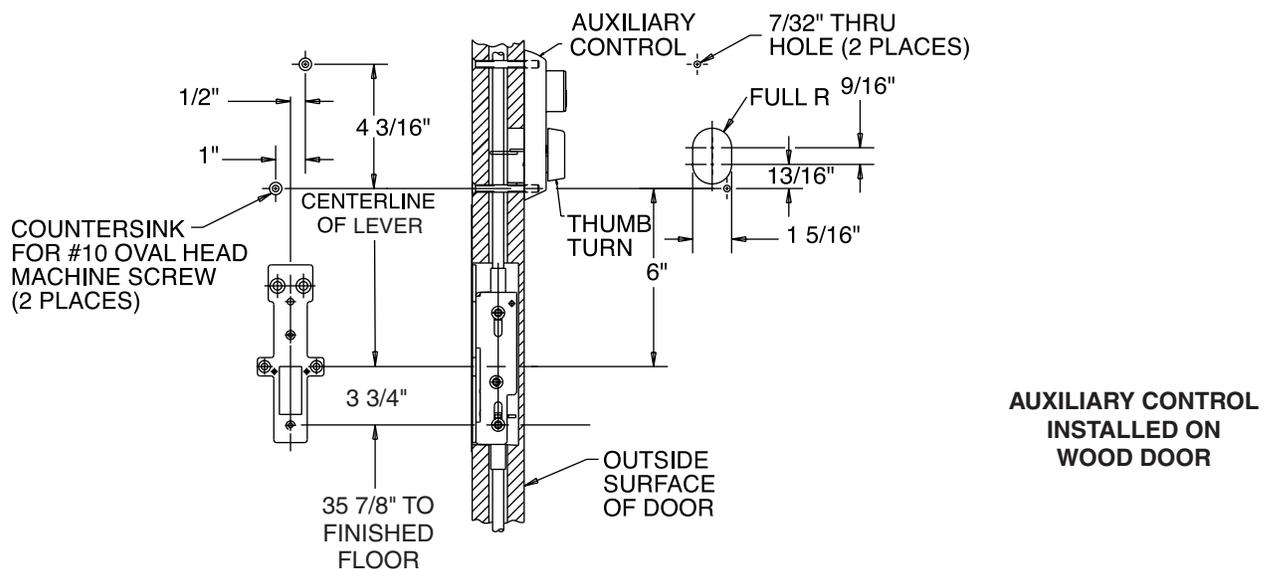

## MP9800 Series Multi-Point Lock Auxiliary Control

**ASSA ABLOY**

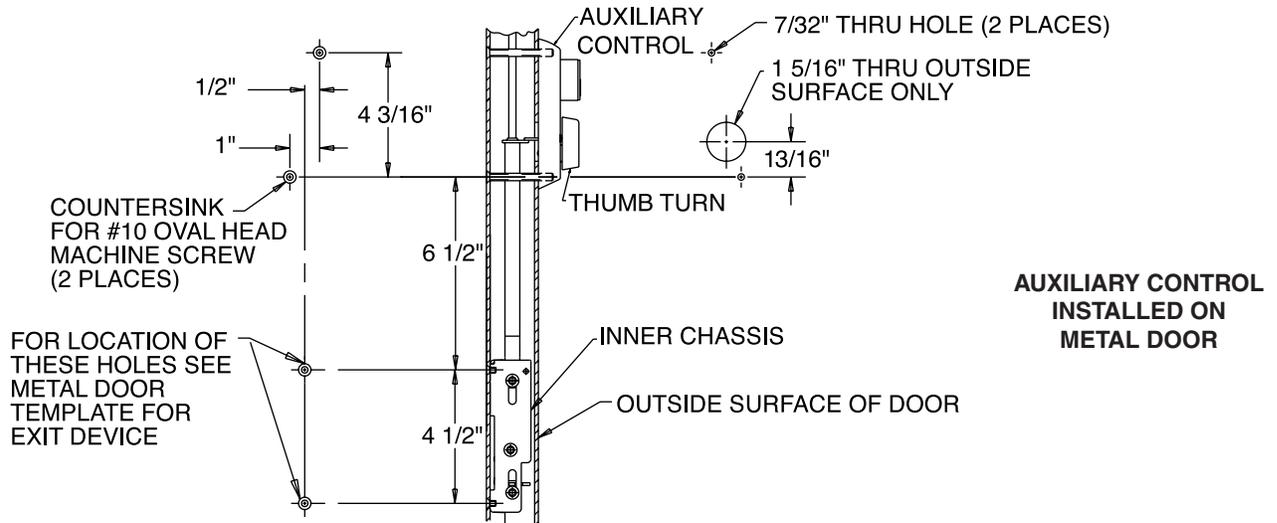

### INSTRUCTIONS

1. PREPARE DOOR USING APPROPRIATE MP9800 SERIES INSTRUCTIONS.
2. PREPARE DOOR FOR AUXILIARY CONTROL AS ILLUSTRATED ABOVE.
3. MOUNT MP9800 SERIES TO DOOR FOLLOWING APPROPRIATE INSTRUCTIONS.
4. MOUNT AUXILIARY CONTROL TO DOOR AS ILLUSTRATED ABOVE.

### OPERATION


THE STOREROOM (AUX159) AUXILIARY CONTROL IS OPERATIVE ONLY WHEN THE KEY IS IN THE CYLINDER AND TURNED.

THE CLASSROOM (AUX155) AUXILIARY CONTROL CAN BE MADE OPERATIVE OR INOPERATIVE BY TURNING THE KEY.

# MP9800 Series Multi-Point Lock Auxiliary Control




ASSA ABLOY

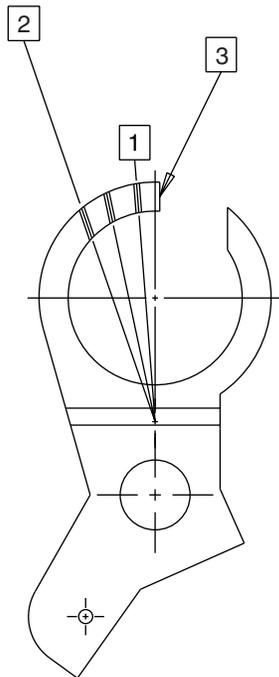

### BREAK OFF POINTS (IF NEEDED)

- 1 USED FOR STOREROOM FUNCTION (AUX159) WITH SARGENT #41 CYLINDER
- 2 USED ON CLASSROOM FUNCTION (AUX155) WITH ALL CYLINDERS
- 3 USE AS IS FOR STOREROOM FUNCTION (AUX159) WITH CORBIN RUSSWIN, BEST CYLINDER, AND SCHLAGE CYLINDER SIZE #41

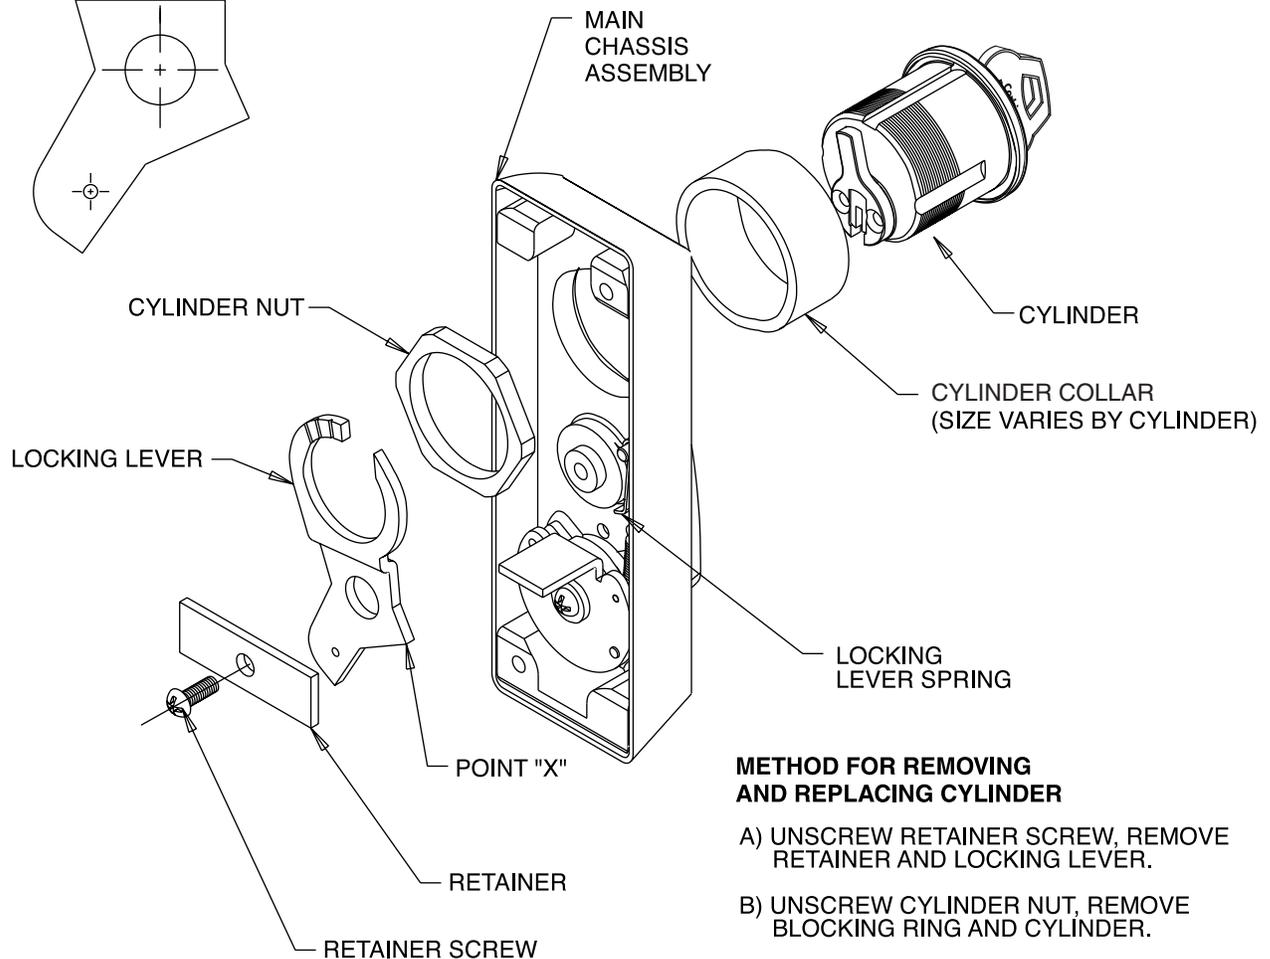

### METHOD FOR REMOVING AND REPLACING CYLINDER

- A) UNSCREW RETAINER SCREW, REMOVE RETAINER AND LOCKING LEVER.
- B) UNSCREW CYLINDER NUT, REMOVE BLOCKING RING AND CYLINDER.
- C) REPLACE CYLINDER BY REVERSING PROCEDURES ABOVE. MAKE SURE THAT CYLINDER CAM FACES UP AND THAT LOCKING LEVER SPRING ENGAGES LOCKING LEVER AT POINT "X".

Corbin Russwin  
225 Episcopal Road  
Berlin, CT 06037  
Phone: 800-810-WIRE  
Fax: 800-447-6714  
corbinrusswin.com

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience