


VERTICAL ROD DEVICE

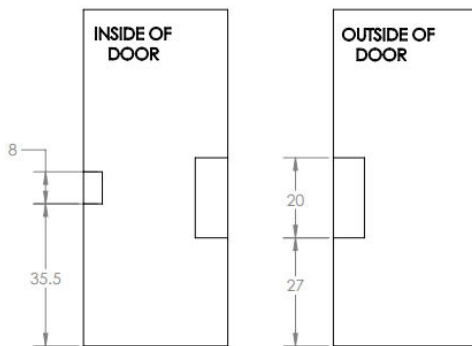

RIM DEVICE

 SUGGESTED REINFORCEMENT PLAN
STANDARD HEIGHT OF PUSHBAR: 39-5/8"

NOTES

1. TAP HOLES FOR HINGE STILE BRACKET WHEN APPLYING EXIT DEVICE
2. REFER TO DEVICE SPECIFIC TEMPLATES FOR ADDITIONAL CUTOUTS AND REQUIREMENTS
3. REINFORCEMENTS TO BE ADEQUATE FOR THE DRILLING AND TAPPING OF #10-24 SCREWS
4. REINFORCEMENTS ON OUTSIDE OF DOOR REQUIRED ONLY IF OUTSIDE TRIM IS USED
5. REINFORCEMENTS TO BE 5" WIDE OR FULL WIDTH OF STILE
6. CHOOSE CORRECT HAND OF DOOR

 PUSHBAR CAN BE MOUNTED AT 38" FROM FINISHED FLOOR FOR ELEMENTARY/ACCESSIBILITY APPLICATIONS

ASSA ABLOY
Opening Solutions

Engineering & Sales
800-854-2629

EXIT DEVICES
MASTER SHEET

RELEASE DATE
4/25/22

TEMPLATE NO.
MEDT23