WOOD DOOR

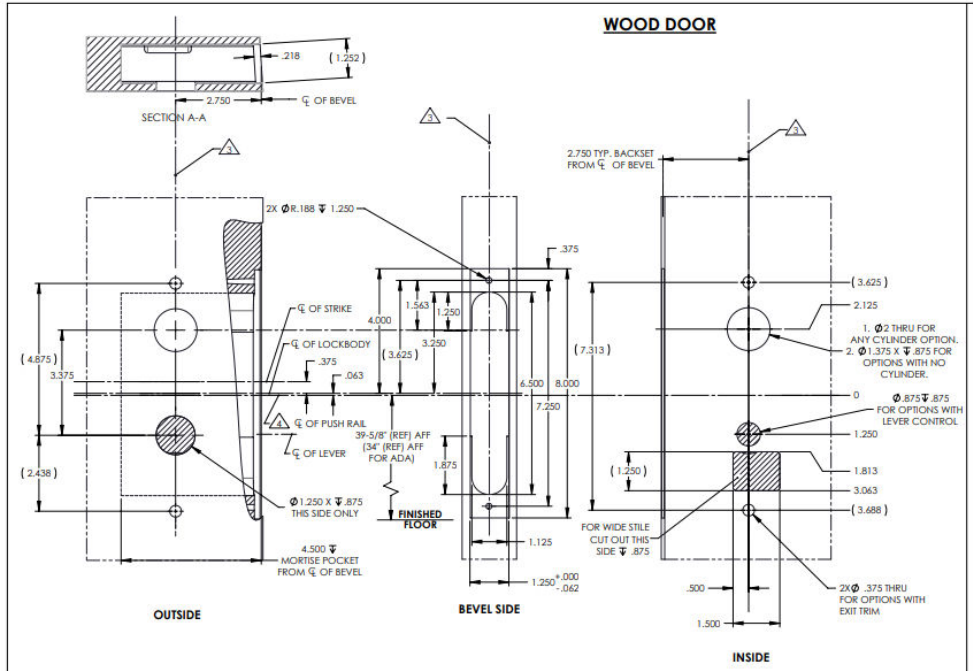

L.H.R.B. DOOR SHOWN

WIDE STILE PREP

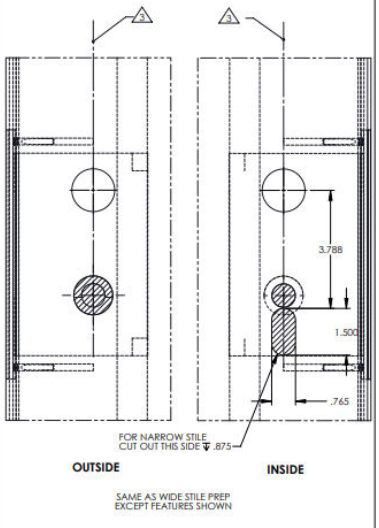

SAME AS WIDE STILE PREP
EXCEPT FEATURES SHOWN

R.H.R.B. DOOR SHOWN

NARROW STILE PREP

NOTES:
1. DRAWING IS NOT TO SCALE.
2. REFERENCE STRIKE TEMPLATE FOR DETAILS TO PREPARE FRAME.
3. VERTICAL CENTERLINE IS REFERENCED FROM THE CENTERLINE OF THE BEVEL. (INDUSTRY STANDARD BEVEL IS 1/8 INCH IN 2 INCHES.)
4. CONSULT THE AUTHORITY HAVING JURISDICTION (AHJ) TO VERIFY THE RECOMMENDED MOUNTING HEIGHT ABOVE THE FINISHED FLOOR (AFF).
5. LIMITATIONS IN THE DOOR CONSTRUCTION PROCESS MAY REQUIRE SOME HOLES TO BE FIELD-LOCATED USING THE PHYSICAL PART AS A TEMPLATE.
6. STANDARD TOLERANCE OF ± .015 APPLIES TO ALL DOOR PREPARATION REQUIREMENTS, UNLESS OTHERWISE SPECIFIED.
7. DOOR REINFORCEMENT IS RECOMMENDED TO IMPROVE (SURFACE MOUNTED) FASTENER HOLDING POWER AND CRUSH RESISTANCE (WHEN THRU-BOLTING IS EMPLOYED). CONSTRUCTION TECHNIQUES SHOULD REFLECT INDUSTRY BEST PRACTICES (I.E. WDMA, SDI) AND AUTHORIZED METHODS WHERE LABEL SERVICE (I.E. UL, W-H) IS IN EFFECT.
8. CAREFULLY NOTE WHICH FEATURES ARE OPTIONAL, (WHETHER THE FEATURE APPLIES TO BOTH SIDES OF THE DOOR AND/OR IF A DEPTH APPLIES.)
9. MAXIMUM PRODUCT DIMENSIONS ARE SHOWN FOR THE PURPOSE OF VERIFYING FITMENT WITH DOOR FRAME STOPS, DOOR STILE SIZE & LIGHT/LOUVER KITS.
10. IF OPTIONAL LEVERS OR ROSES ARE USED REFERENCE THE RELATED PRODUCT DIMENSIONS TO VERIFY THE FITMENT REQUIREMENTS.
11. SEE TEMPLATE MEDT42 (WIDE) OR MEDT45 (NARROW) FOR EXIT DEVICE PREP
SEE TEMPLATE MEDT19 FOR EXIT TRIM PREP.

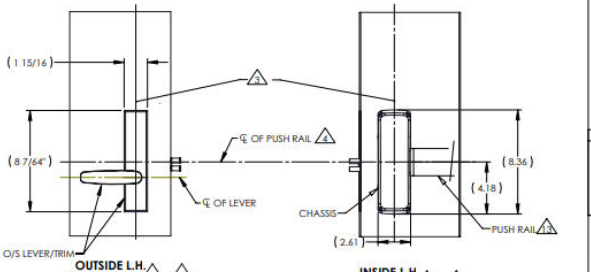

BACKSET DEFINITION	DOOR HANDING
BACKSET, TOP OF DOOR, VERTICAL ℄ OF BEVEL	L.H. INSIDE / OUTSIDE, R.H. INSIDE / OUTSIDE, L.H.R.B., R.H.R.B.

ASSA ABLOY Opening Solutions

DOOR MANUFACTURERS TEMPLATE:
WOOD DOOR
NARROW OR WIDE STILE
MORTISE EXIT DEVICE

RELEASE DATE: 5/10/22
TEMPLATE NO.: MEDT46
SHEET 1 OF 1