


FEATURE FOR LHRB

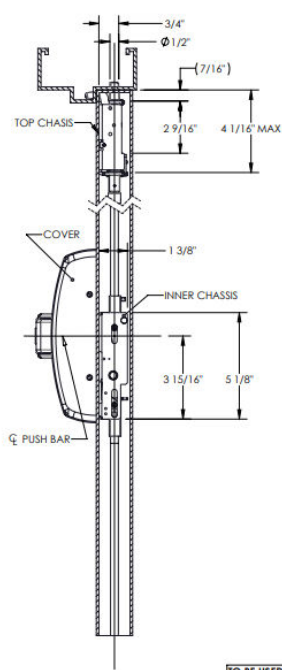

TO BE USED FOR:  
 NB-MD-PB600  
 NB-12-MD-PB600  
 PEDS800 MSS MD  
 PEDS800A MSS MD

- NOTES:
- DOOR PREPARATION SHOWN FOR INSIDE DOOR ONLY.
  - IF OUTSIDE PULL AND/OR OUTSIDE CONTROL IS USED, SEE APPROPRIATE METAL DOOR TEMPLATE FOR OUTSIDE DOOR PREP.
  - REINFORCE HOLLOW METAL DOORS FOR TOP AND INNER CHASSIS WHERE HARDWARE IS TO BE ATTACHED.
  - SURFACE OF DOOR WHERE EXIT DEVICES IS TO BE APPLIED, MUST BE FLUSH.
  - WE RECOMMEND THAT ALL TAPPED HOLES BE DRILLED AND TAPPED IN FIELD.
  - TOLERANCE ON ALL FRACTIONAL DIMENSIONS  $\pm 1/64$ ".
  - BOTTOM AND TOP STRIKES MUST BE USED. SEE STRIKE TEMPLATE NO. MEDT6.
  - SEE TEMPLATE NO. MEDT7 FOR AUX CONTROL IF REQ'D.

**ASSA ABLOY**

Opening Solutions  
 Assa Abloy AB  
 Assa Abloy Inc.

DOOR MANUFACTURING TEMPLATE:  
 WIDE PANIC & FIRE CONCEALED  
 VERTICAL ROD FOR METAL DOORS  
 (INSIDE FACE ONLY)  
 EXIT DEVICE

RELEASE DATE

05/02/22

TEMPLATE NO.

MEDT5