
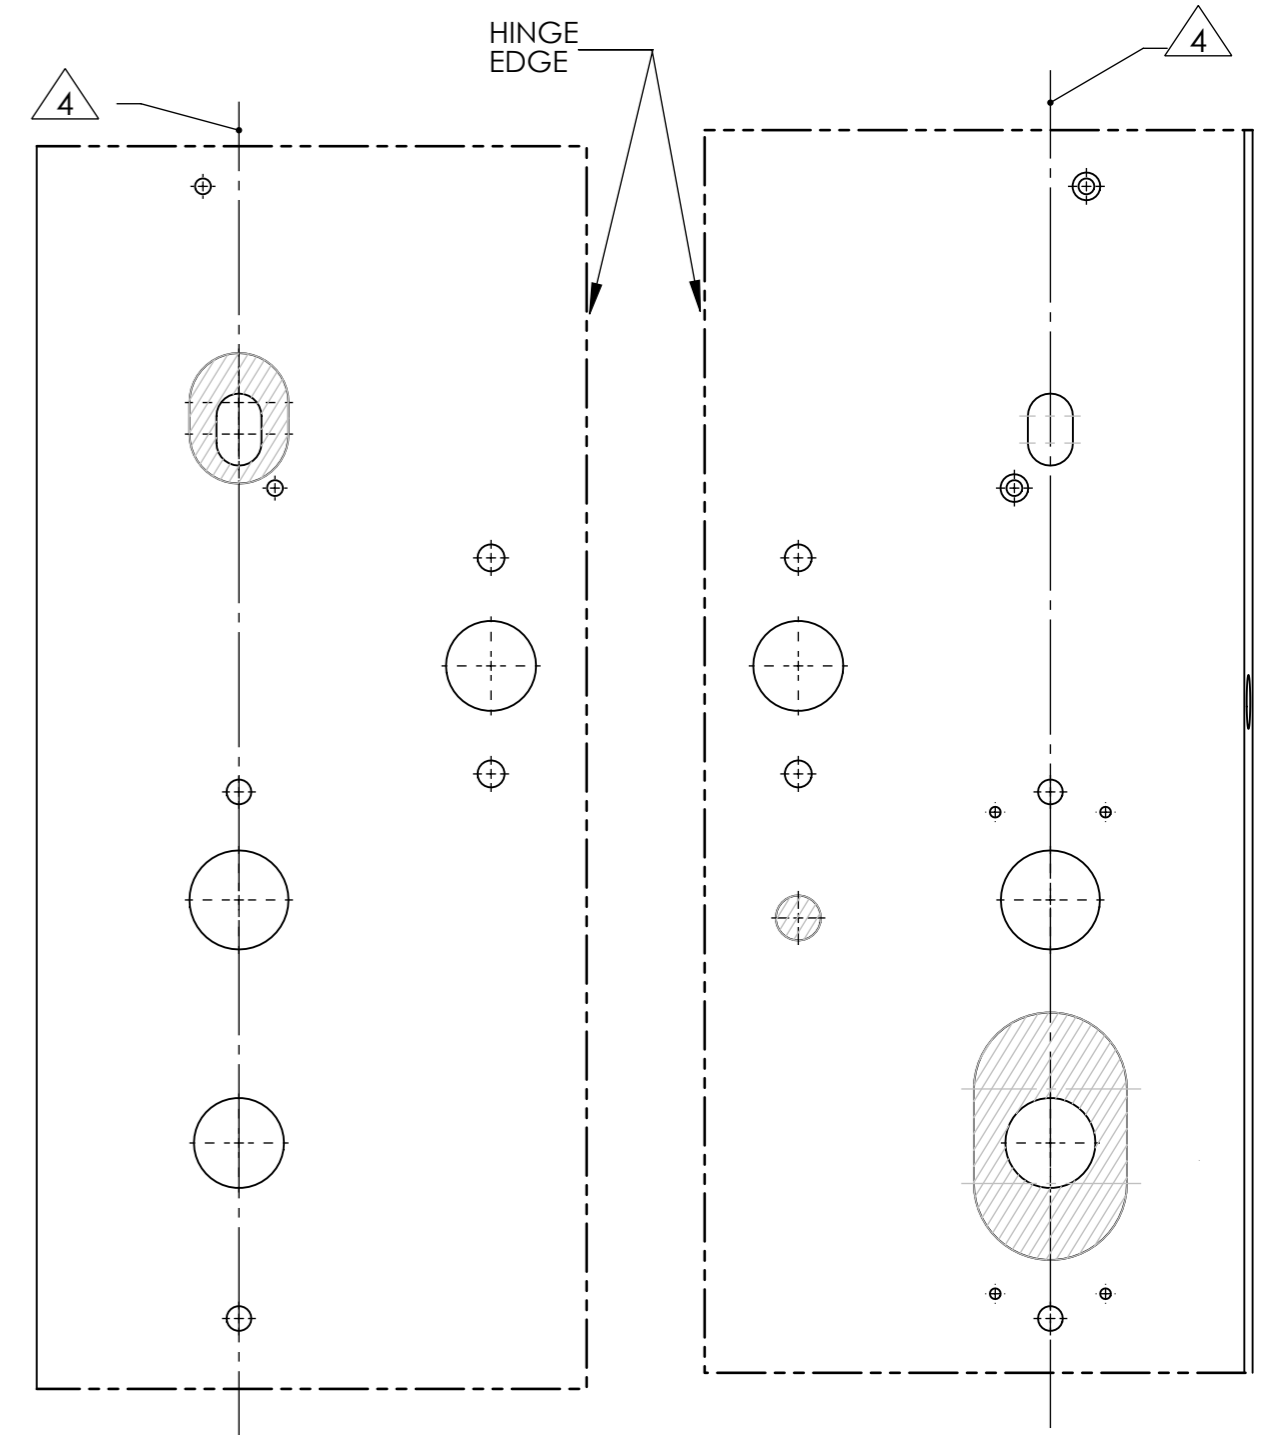
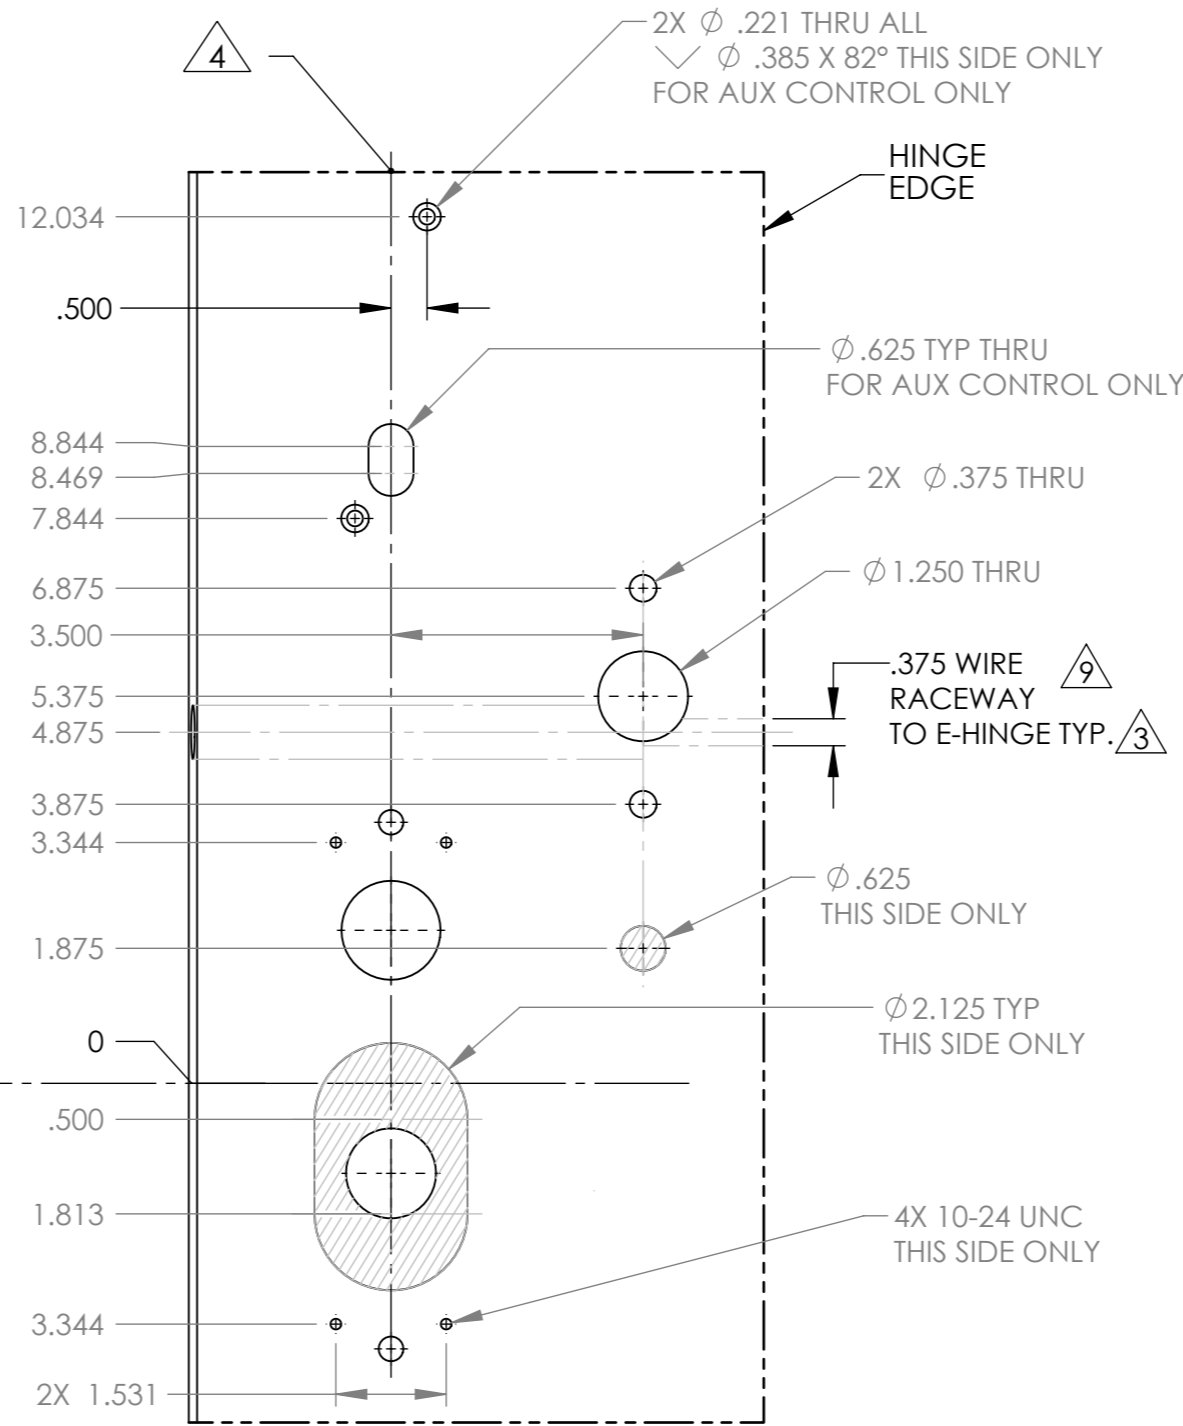


# METAL DOOR

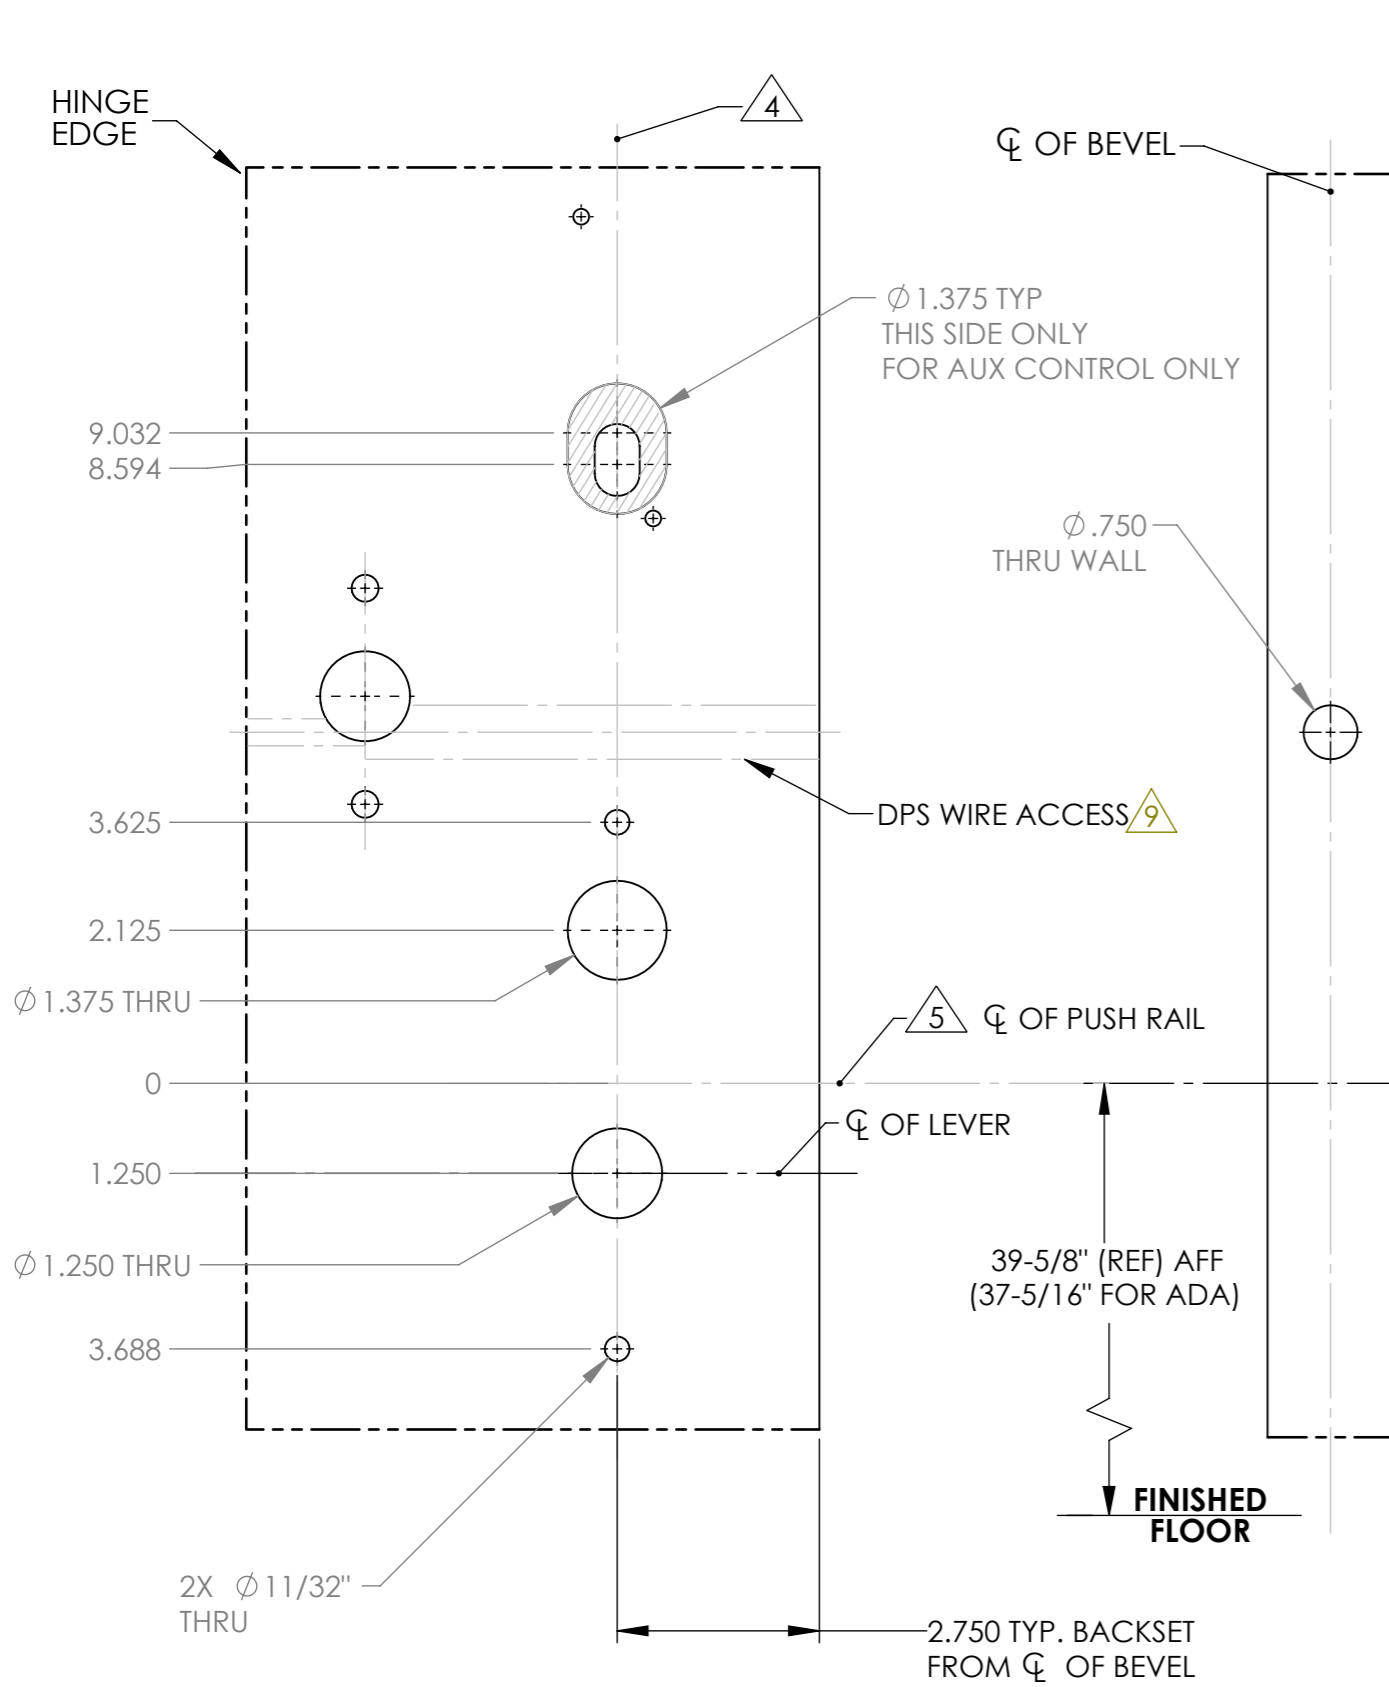

L.H.R.B. OUTSIDE

L.H.R.B. BEVEL SIDE


L.H.R.B. INSIDE

R.H.R.B. OUTSIDE

R.H.R.B. INSIDE

**NOTES:**

- DRAWING IS NOT TO SCALE. REFERENCE STRIKE TEMPLATE FOR DETAILS TO PREPARE FRAME.
- FOR ELECTROLYNX APPLICATIONS, REFER TO MCKINNEY TRANSFER DEVICE CATALOG.
- VERTICAL CENTERLINE IS REFERENCED FROM THE CENTERLINE OF THE BEVEL. (INDUSTRY STANDARD BEVEL IS 1/8 INCH IN 2 INCHES.)
- CONSULT THE AUTHORITY HAVING JURISDICTION (AHJ) TO VERIFY THE RECOMMENDED MOUNTING HEIGHT ABOVE THE FINISHED FLOOR (AFF). LIMITATIONS IN THE DOOR CONSTRUCTION PROCESS MAY REQUIRE SOME HOLES TO BE FIELD-LOCATED USING THE PHYSICAL PART AS A TEMPLATE. STANDARD TOLERANCE OF ± .015 APPLIES TO ALL DOOR PREPARATION REQUIREMENTS, UNLESS OTHERWISE SPECIFIED.
- DOOR REINFORCEMENT IS RECOMMENDED TO IMPROVE (SURFACE MOUNTED) FASTENER HOLDING POWER AND CRUSH RESISTANCE (WHEN THRU-BOLTING IS EMPLOYED). CONSTRUCTION TECHNIQUES SHOULD REFLECT INDUSTRY BEST PRACTICES (I.E. WDMA, SDI) AND AUTHORIZED METHODS WHERE LABEL SERVICE (I.E. UL, W-H) IS IN EFFECT.
- WIRE RACEWAY AREAS SHALL BE FREE OF OBSTRUCTIONS & SHARP EDGES TO PROTECT WIRES FROM CUTS & ABRASIONS.
- CAREFULLY NOTE WHICH FEATURES ARE OPTIONAL, (WHETHER THE FEATURE APPLIES TO BOTH SIDES OF THE DOOR AND/OR IF A DEPTH APPLIES.)
- MAXIMUM PRODUCT DIMENSIONS ARE SHOWN FOR THE PURPOSE OF VERIFYING FITMENT WITH DOOR FRAME STOPS, DOOR STILE SIZE & LIGHT/LOUVER KITS. IF OPTIONAL LEVERS OR ROSES ARE USED REFERENCE THE RELATED PRODUCT DIMENSIONS TO VERIFY THE FITMENT REQUIREMENTS.
- SEE TEMPLATE MEDT4 (METAL DOORS) & MEDT33 (WOOD DOORS) FOR EXIT DEVICE & ROD LATCH PREP.

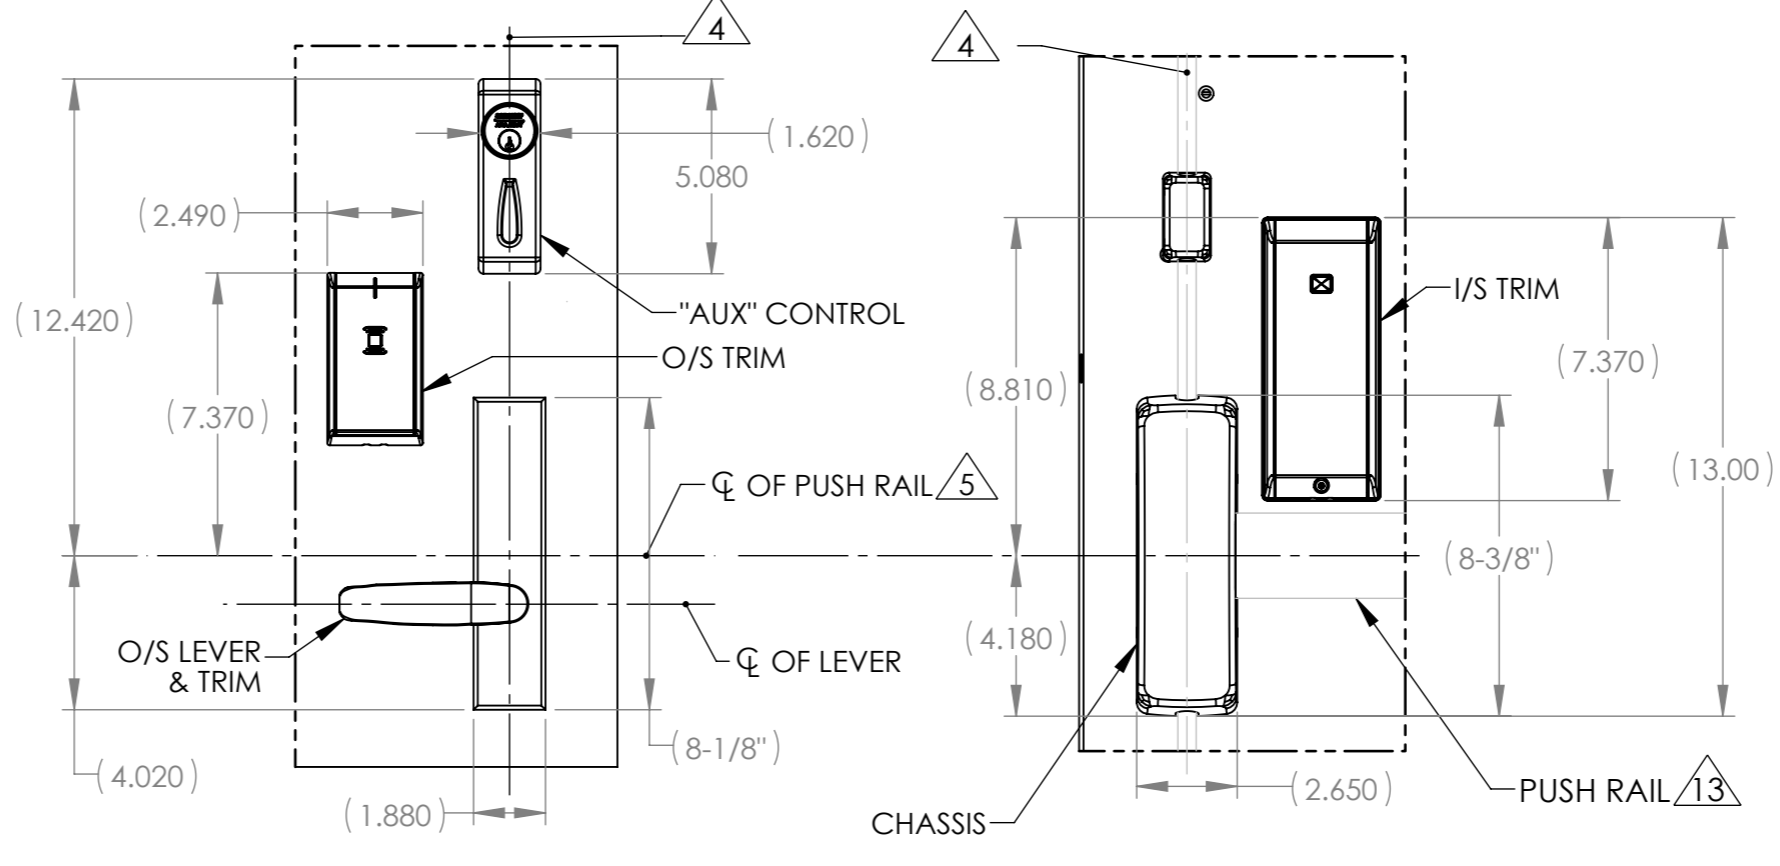


OUTSIDE L.H.R.B. TRIM SHOWN 11 12

INSIDE L.H.R.B. TRIM SHOWN 11 12




**AUTHORIZED OPTIONS**  
IN100, IN120, IN 220

OPTIONS TABLE			
OPTION	DESCRIPTION	USED FOR OPTIONS	
		91- / M35	ALL OTHERS
A	HARD WIRE	X	-
		IN220	ALL OTHERS
B	POWER OVER ETHERNET	X	-

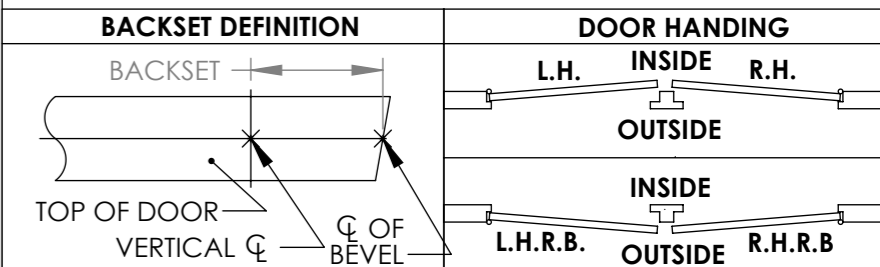

**ASSA ABLOY**  
Opening Solutions  
Experience a safer and more open world.  
DOOR MANUFACTURERS TEMPLATE: IN SERIES TRIM (EA OPTION)  
METAL DOOR SVR EXIT DEVICE  
RELEASE DATE: 10/16/2023  
TEMPLATE NO. MEDT69\_3  
SHEET 1 OF 4

# METAL DOOR

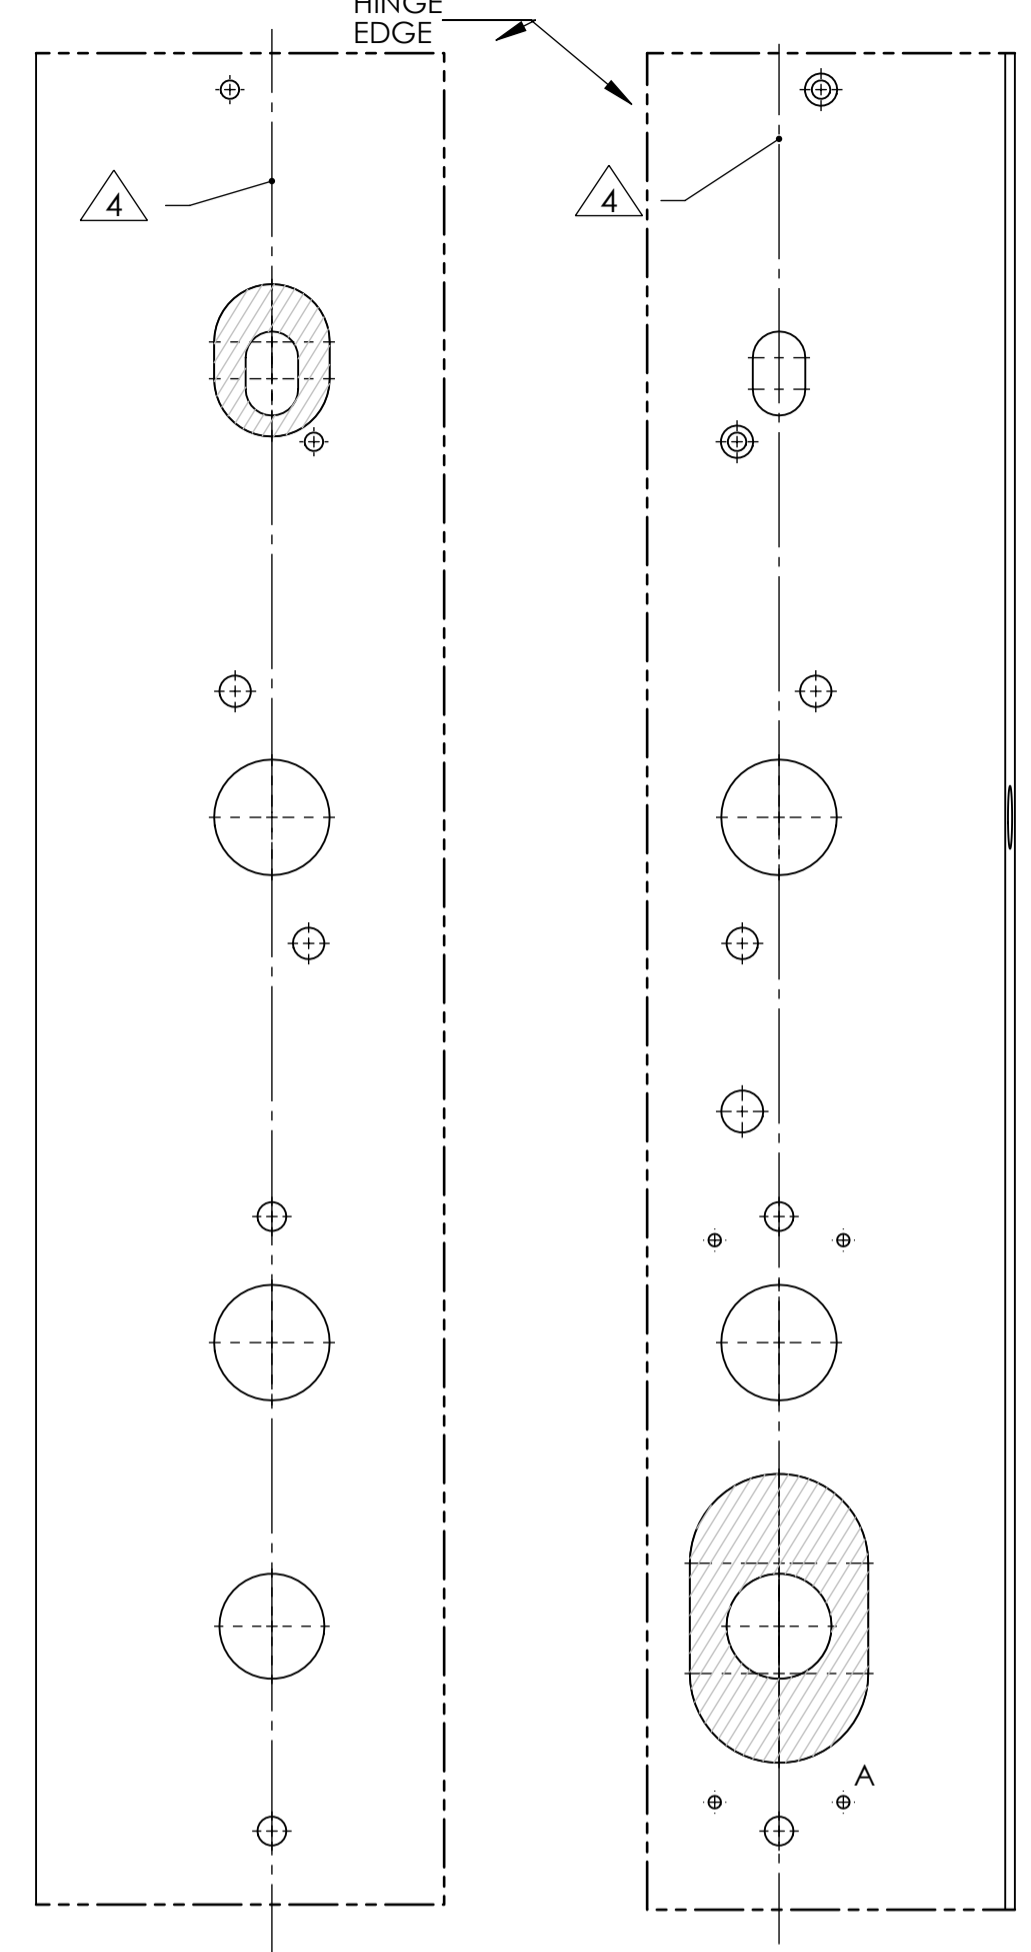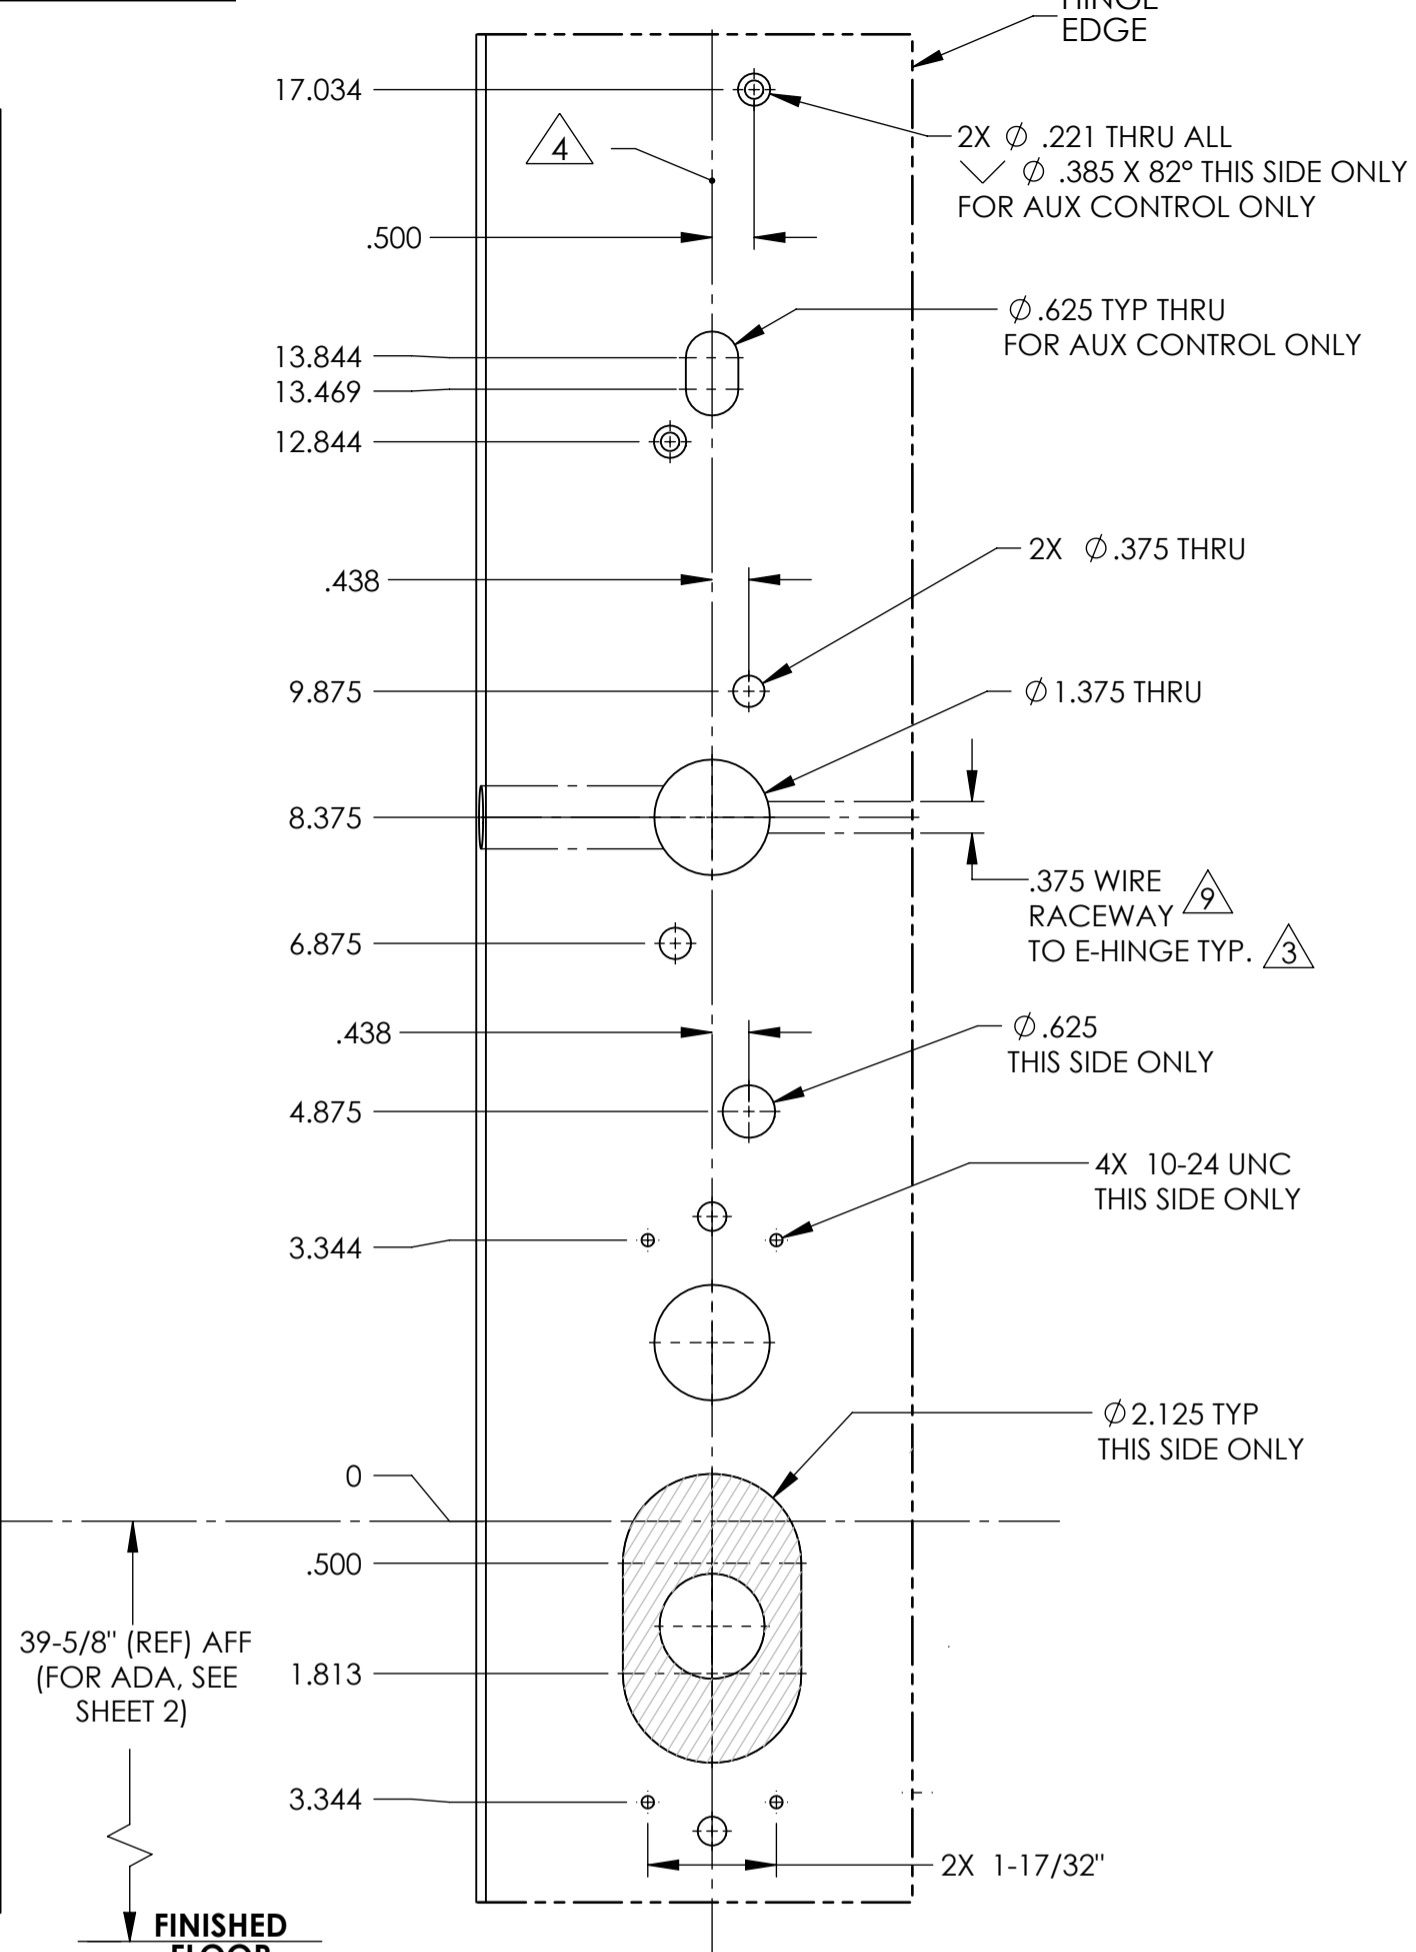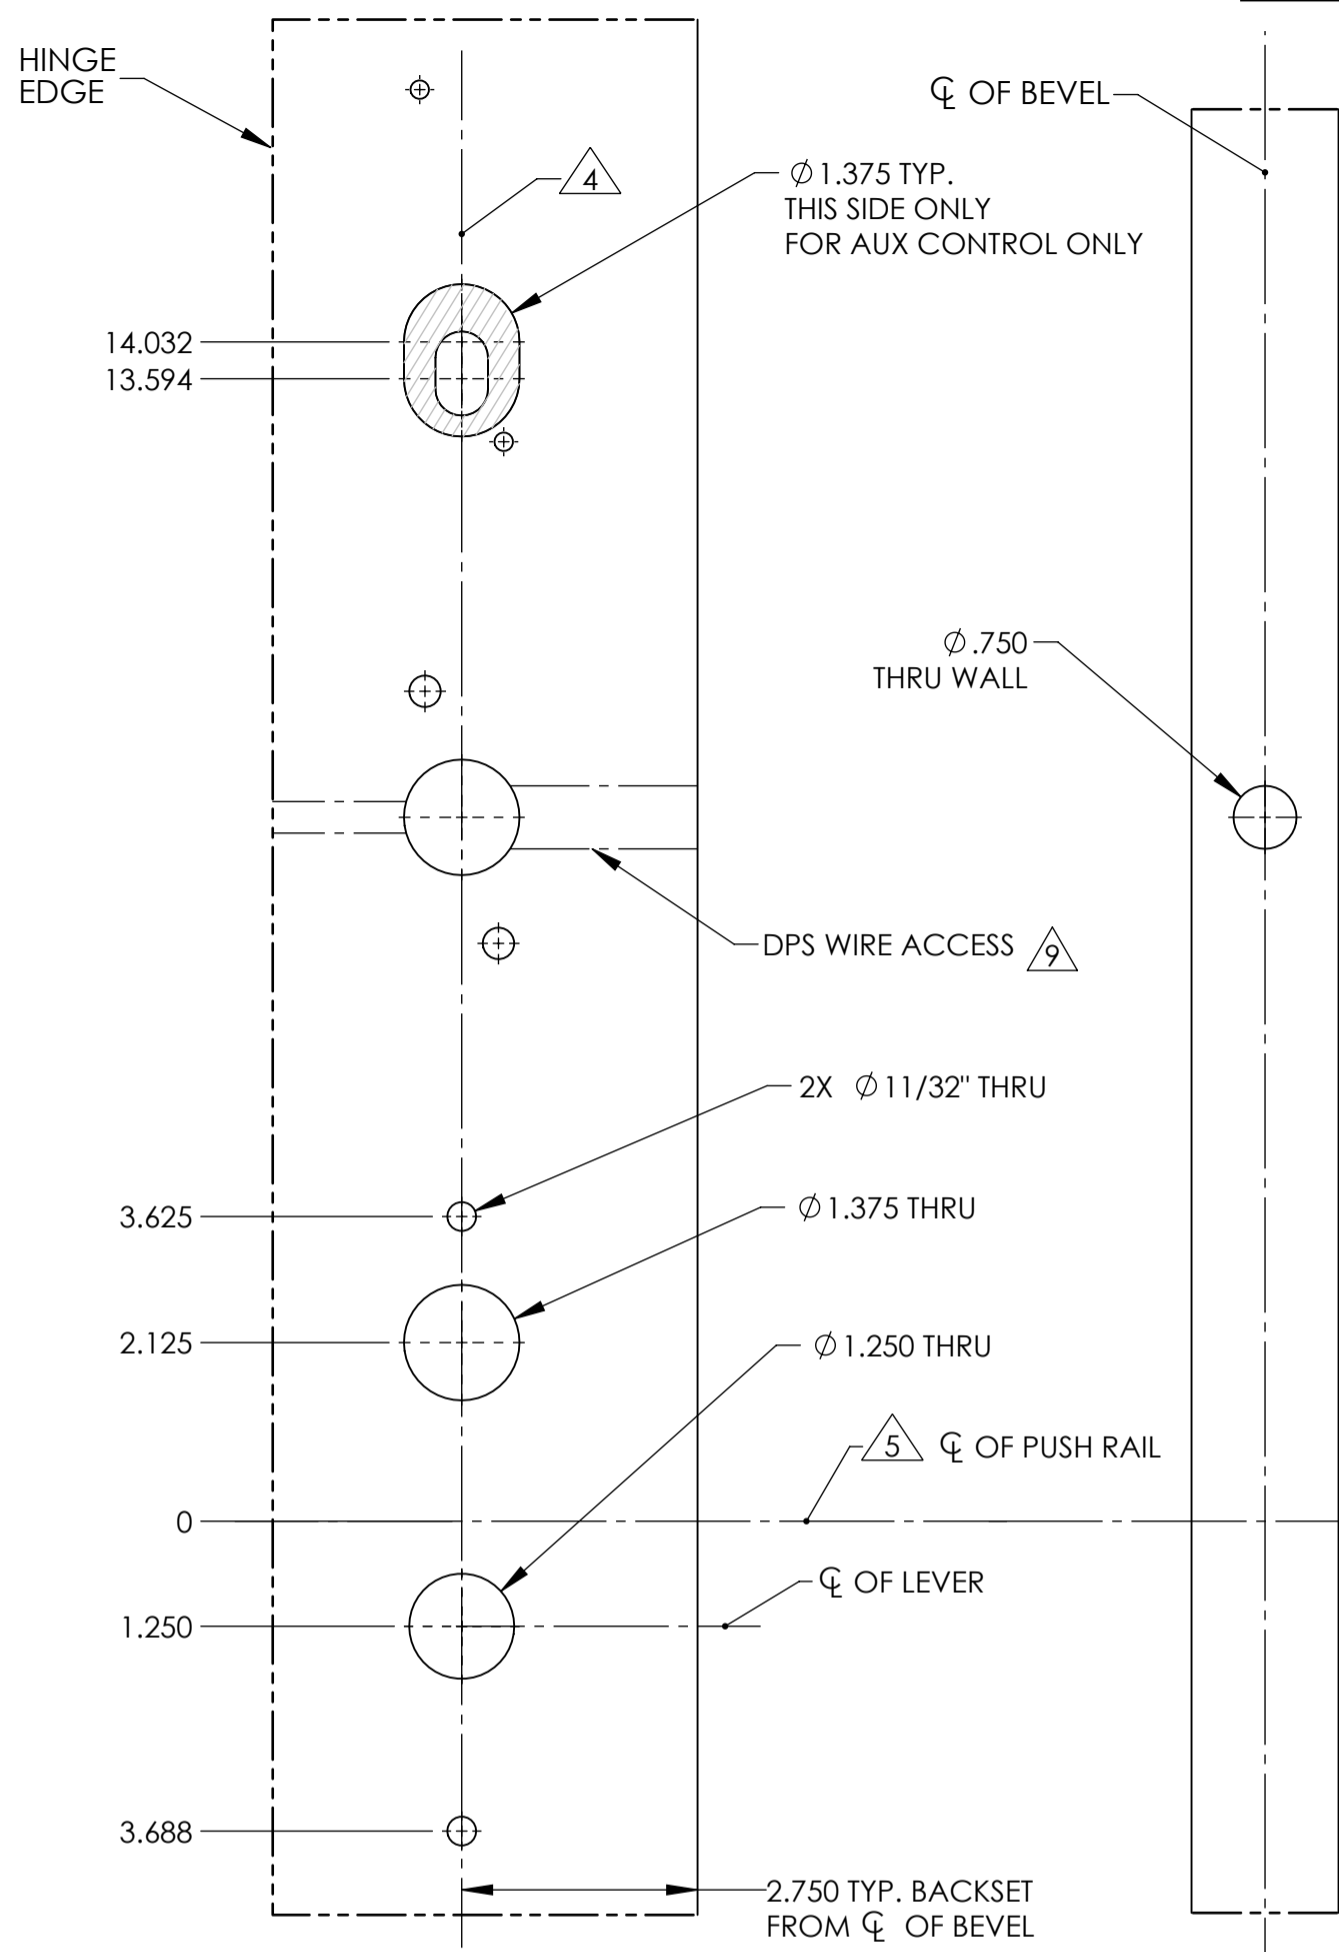

L.H.R.B. OUTSIDE

L.H.R.B. BEVEL SIDE


L.H.R.B. INSIDE

R.H.R.B. OUTSIDE

R.H.R.B. INSIDE

**NOTES:**

- DRAWING IS NOT TO SCALE. REFERENCE STRIKE TEMPLATE FOR DETAILS TO PREPARE FRAME.
- FOR ELECTROLYNX APPLICATIONS, REFER TO MCKINNEY TRANSFER DEVICE CATALOG.
- VERTICAL CENTERLINE IS REFERENCED FROM THE CENTERLINE OF THE BEVEL. (INDUSTRY STANDARD BEVEL IS 1/8 INCH IN 2 INCHES.)
- CONSULT THE AUTHORITY HAVING JURISDICTION (AHJ) TO VERIFY THE RECOMMENDED MOUNTING HEIGHT ABOVE THE FINISHED FLOOR (AFF). LIMITATIONS IN THE DOOR CONSTRUCTION PROCESS MAY REQUIRE SOME HOLES TO BE FIELD-LOCATED USING THE PHYSICAL PART AS A TEMPLATE. STANDARD TOLERANCE OF ± .015 APPLIES TO ALL DOOR PREPARATION REQUIREMENTS, UNLESS OTHERWISE SPECIFIED.
- DOOR REINFORCEMENT IS RECOMMENDED TO IMPROVE (SURFACE MOUNTED) FASTENER HOLDING POWER AND CRUSH RESISTANCE (WHEN THRU-BOLTING IS EMPLOYED). CONSTRUCTION TECHNIQUES SHOULD REFLECT INDUSTRY BEST PRACTICES (I.E. WDMA, SDI) AND AUTHORIZED METHODS WHERE LABEL SERVICE (I.E. UL, W-H) IS IN EFFECT.
- WIRE RACEWAY AREAS SHALL BE FREE OF OBSTRUCTIONS & SHARP EDGES TO PROTECT WIRES FROM CUTS & ABRASIONS.
- CAREFULLY NOTE WHICH FEATURES ARE OPTIONAL. (WHETHER THE FEATURE APPLIES TO BOTH SIDES OF THE DOOR AND/OR IF A DEPTH APPLIES.)
- MAXIMUM PRODUCT DIMENSIONS ARE SHOWN FOR THE PURPOSE OF VERIFYING FITMENT WITH DOOR FRAME STOPS, DOOR STILE SIZE & LIGHT/LOUVER KITS. IF OPTIONAL LEVERS OR ROSES ARE USED REFERENCE THE RELATED PRODUCT DIMENSIONS TO VERIFY THE FITMENT REQUIREMENTS. SEE TEMPLATE MEDT4 (METAL DOORS) & MEDT33 (WOOD DOORS) FOR EXIT DEVICE & ROD LATCH PREP.

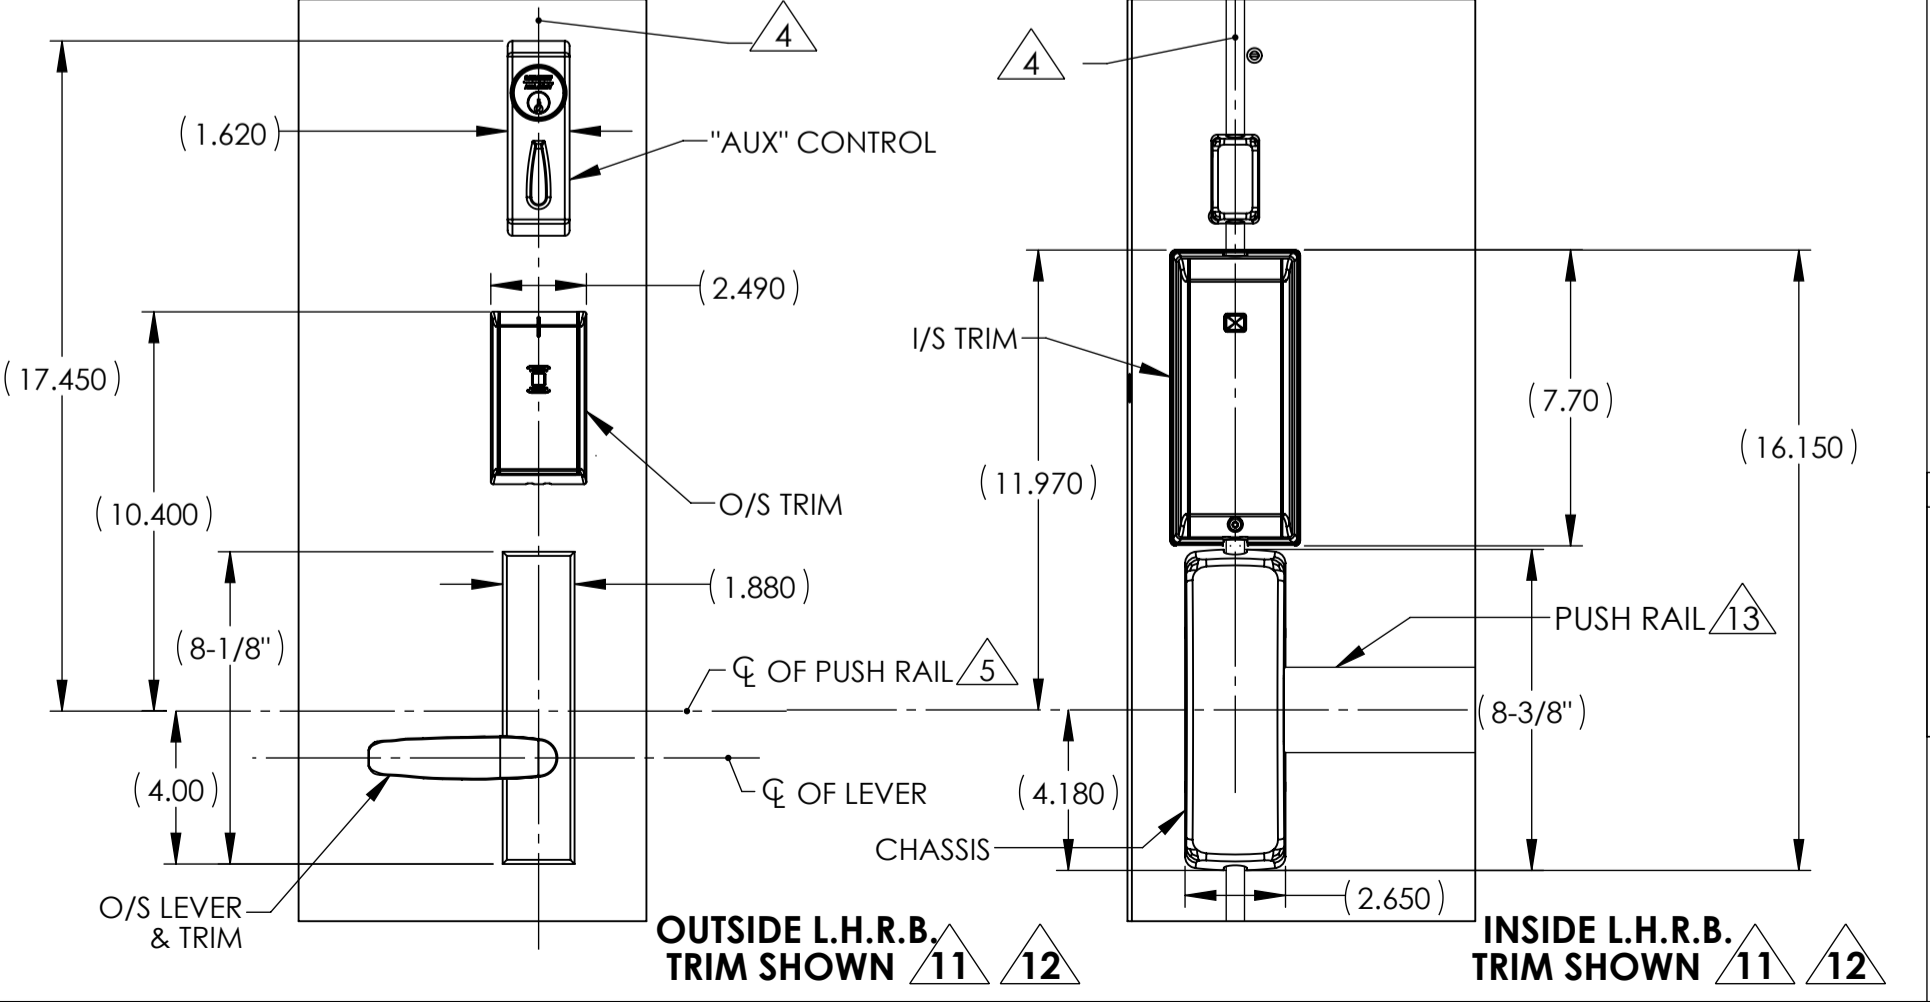

OUTSIDE L.H.R.B. TRIM SHOWN 11 12

INSIDE L.H.R.B. TRIM SHOWN 11 12

AUTHORIZED OPTIONS			
IN100, IN120, IN 220			
OPTIONS TABLE			
OPTION	DESCRIPTION	USED FOR OPTIONS	
		91- / M35	ALL OTHERS
A	HARD WIRE	X	-
B	POWER OVER ETHERNET	X	-

BACKSET DEFINITION		DOOR HANDING	
BACKSET		L.H.	R.H.
TOP OF DOOR VERTICAL C		INSIDE	
C OF BEVEL		OUTSIDE	
		L.H.R.B.	R.H.R.B.

**ASSA ABLOY**  
Opening Solutions  
Experience a safer world more open world.




DOOR MANUFACTURERS TEMPLATE: IN SERIES TRIM (STD. ON-CENTER) METAL DOOR SVR EXIT DEVICE

RELEASE DATE: 10/16/2023  
TEMPLATE NO.: MEDT69\_3

SHEET 2 OF 4



# WOOD DOOR

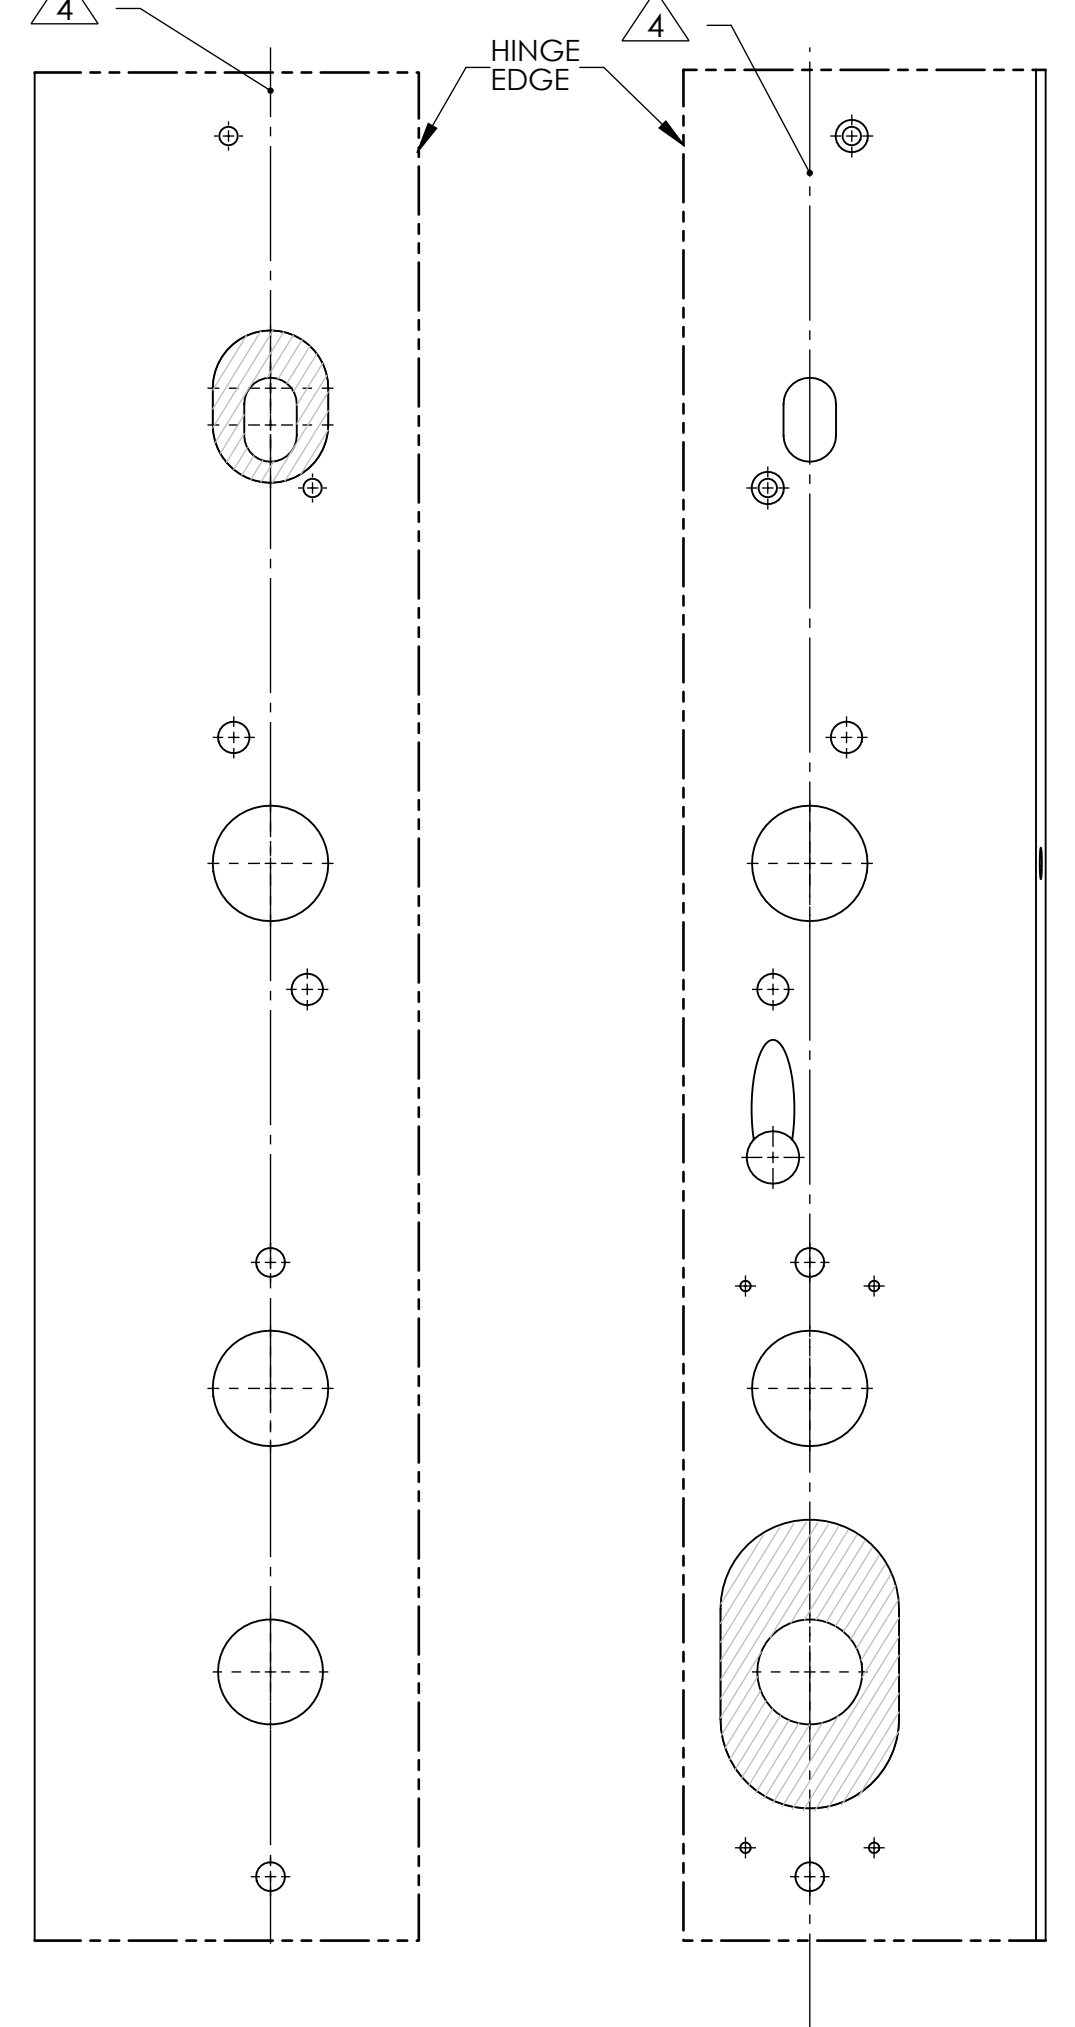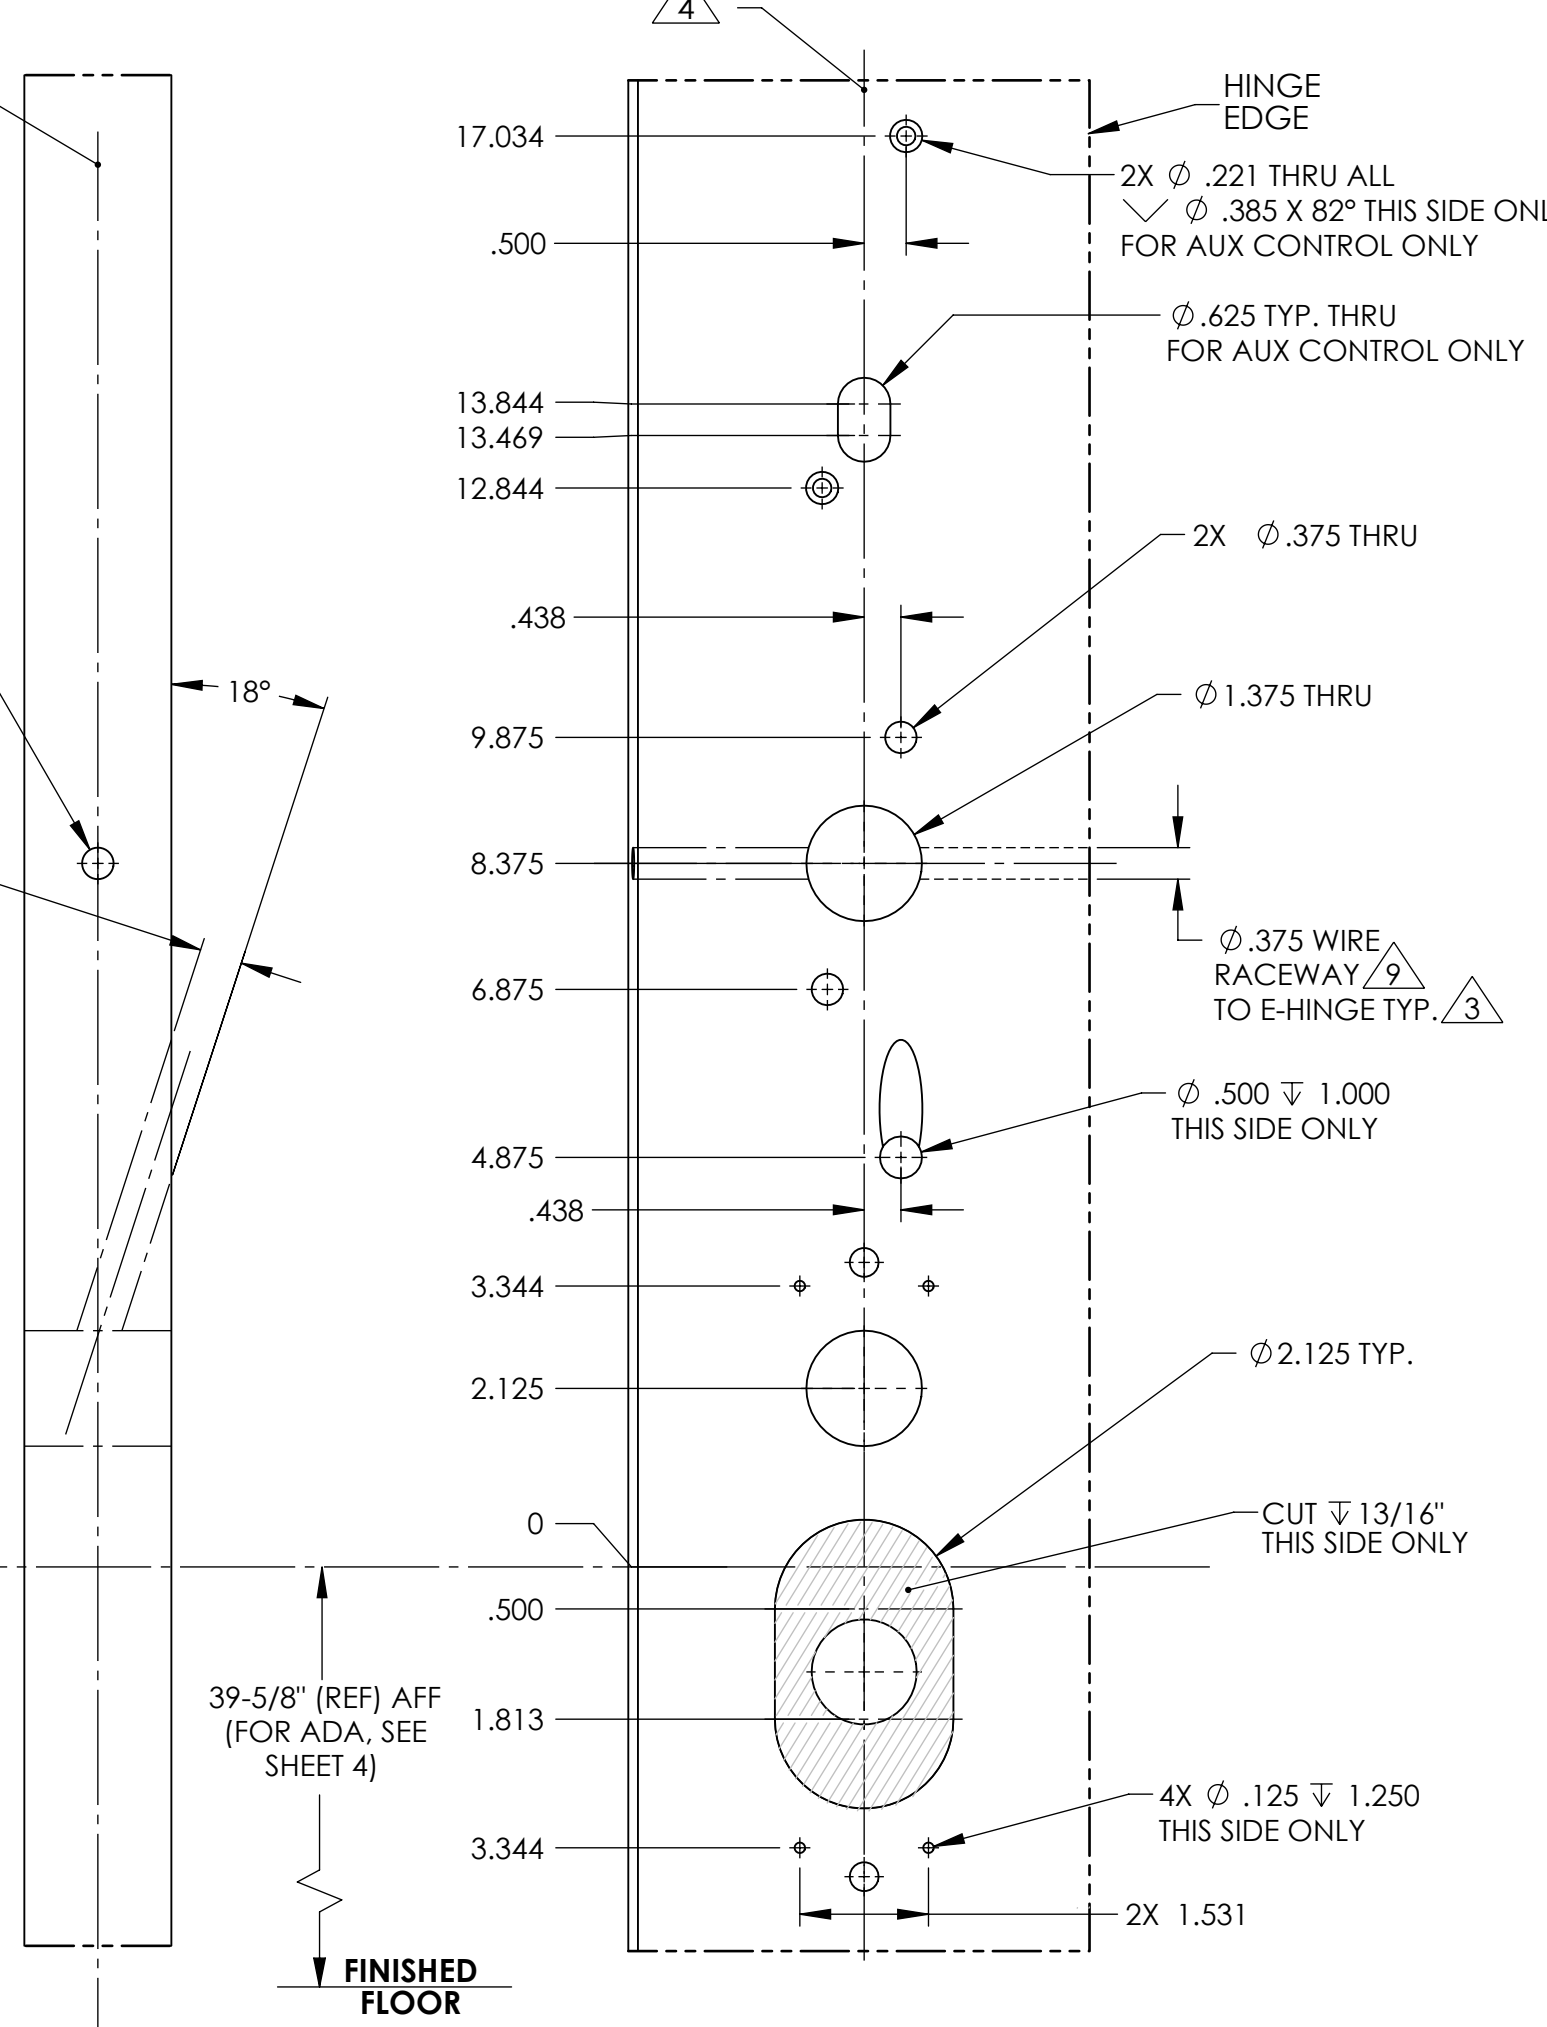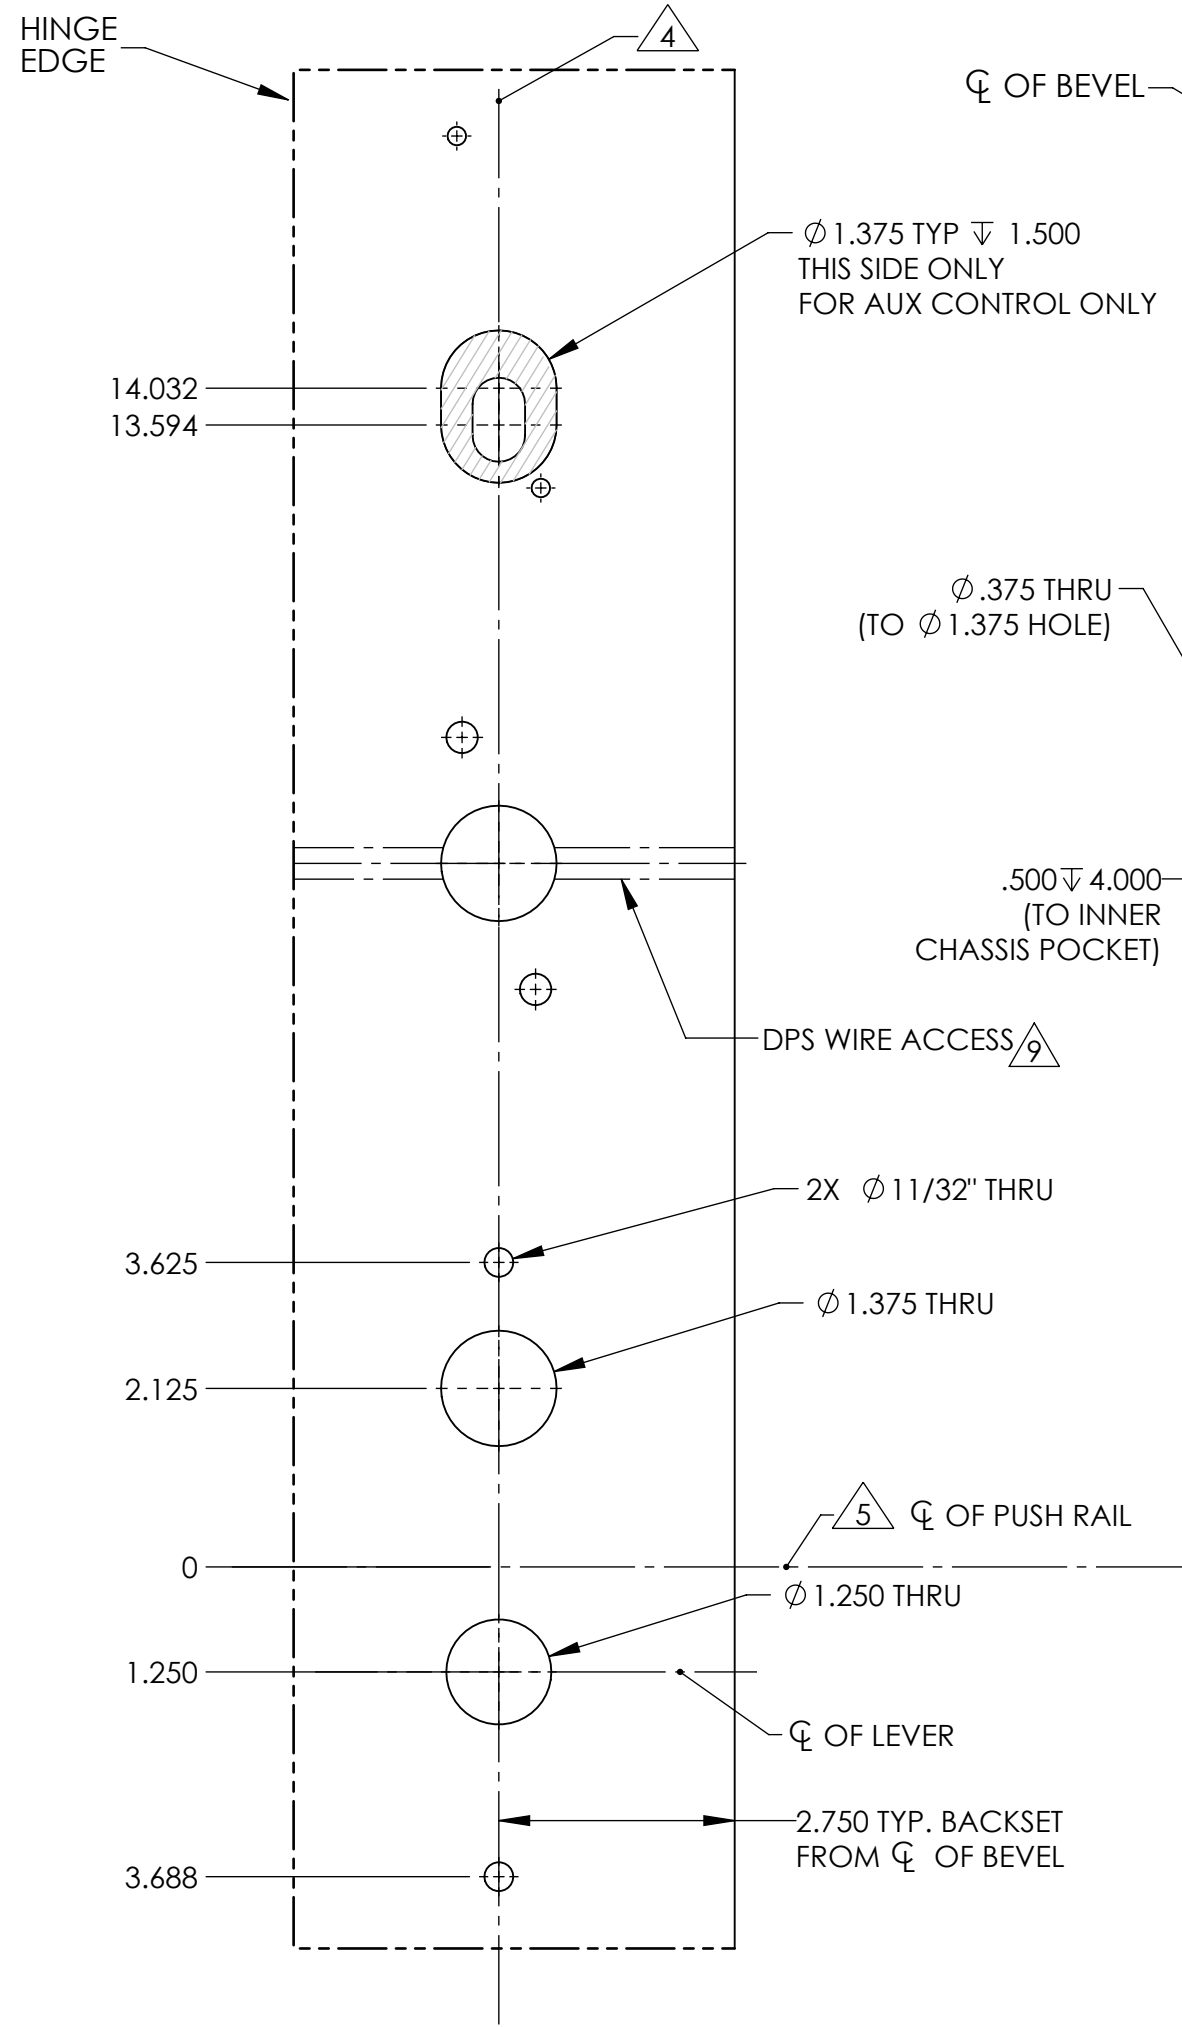

L.H.R.B. OUTSIDE

L.H.R.B. BEVEL SIDE


L.H.R.B. INSIDE

R.H.R.B. OUTSIDE

R.H.R.B. INSIDE


NOTES:

- DRAWING IS NOT TO SCALE. REFERENCE STRIKE TEMPLATE FOR DETAILS TO PREPARE FRAME.
- 
- FOR ELECTROLYNX APPLICATIONS, REFER TO MCKINNEY TRANSFER DEVICE CATALOG.
- VERTICAL CENTERLINE IS REFERENCED FROM THE CENTERLINE OF THE BEVEL. (INDUSTRY STANDARD BEVEL IS 1/8 INCH IN 2 INCHES.)
- CONSULT THE AUTHORITY HAVING JURISDICTION (AHJ) TO VERIFY THE RECOMMENDED MOUNTING HEIGHT ABOVE THE FINISHED FLOOR (AFF). LIMITATIONS IN THE DOOR CONSTRUCTION PROCESS MAY REQUIRE SOME HOLES TO BE FIELD-LOCATED USING THE PHYSICAL PART AS A TEMPLATE. STANDARD TOLERANCE OF ± .015 APPLIES TO ALL DOOR PREPARATION REQUIREMENTS, UNLESS OTHERWISE SPECIFIED.
- DOOR REINFORCEMENT IS RECOMMENDED TO IMPROVE (SURFACE MOUNTED) FASTENER HOLDING POWER AND CRUSH RESISTANCE (WHEN THRU-BOLTING IS EMPLOYED). CONSTRUCTION TECHNIQUES SHOULD REFLECT INDUSTRY BEST PRACTICES (I.E. WDMA, SDI) AND AUTHORIZED METHODS WHERE LABEL SERVICE (I.E. UL, W-H) IS IN EFFECT.
- WIRE RACEWAY AREAS SHALL BE FREE OF OBSTRUCTIONS & SHARP EDGES TO PROTECT WIRES FROM CUTS & ABRASIONS.
- CAREFULLY NOTE WHICH FEATURES ARE OPTIONAL, (WHETHER THE FEATURE APPLIES TO BOTH SIDES OF THE DOOR AND/OR IF A DEPTH APPLIES.)
- MAXIMUM PRODUCT DIMENSIONS ARE SHOWN FOR THE PURPOSE OF VERIFYING FITMENT WITH DOOR FRAME STOPS, DOOR STILE SIZE & LIGHT/LOUVER KITS. IF OPTIONAL LEVERS OR ROSES ARE USED REFERENCE THE RELATED PRODUCT DIMENSIONS TO VERIFY THE FITMENT REQUIREMENTS.
- SEE TEMPLATE MEDT4 (METAL DOORS) & MEDT33 (WOOD DOORS) FOR EXIT DEVICE & ROD LATCH PREP.
- 
- 
- 
- 

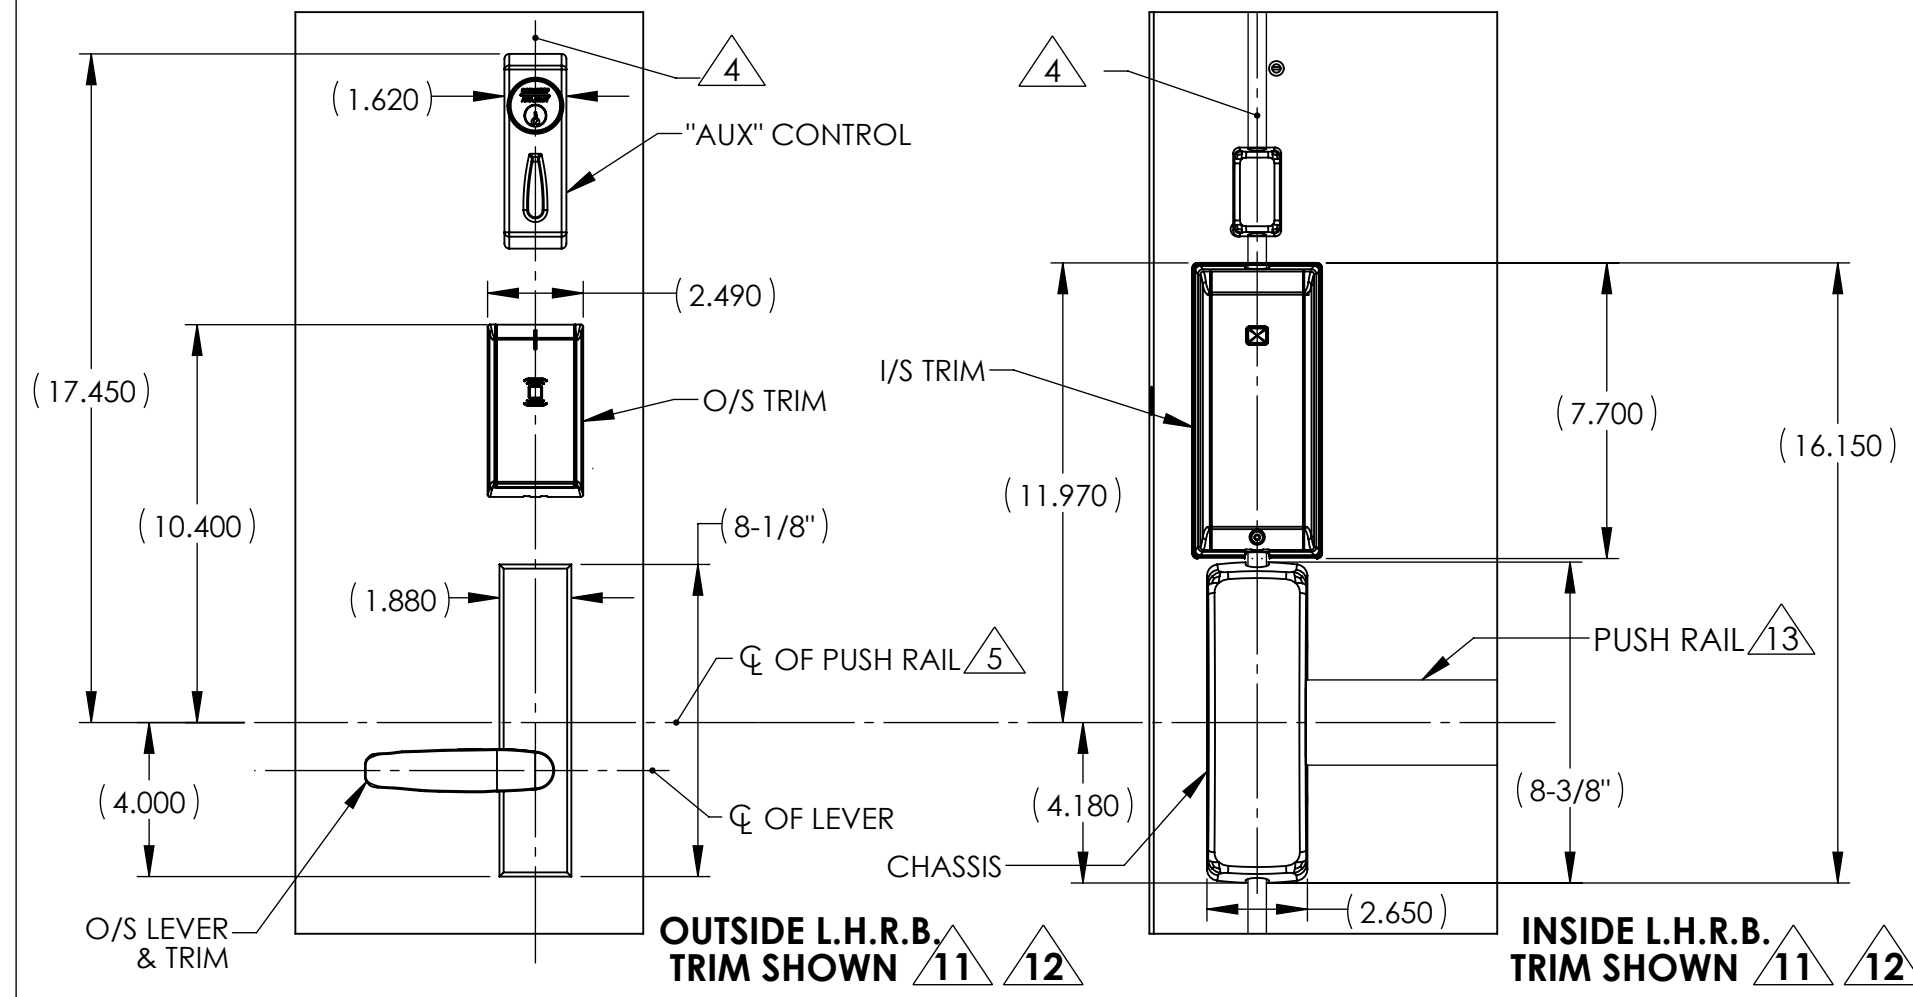

AUTHORIZED OPTIONS			
IN100, IN120, IN 220			

OPTIONS TABLE			
OPTION	DESCRIPTION	USED FOR OPTIONS	
		91- / M35	ALL OTHERS
A	HARD WIRE	X	-
B	POWER OVER ETHERNET	IN220	ALL OTHERS
		X	-

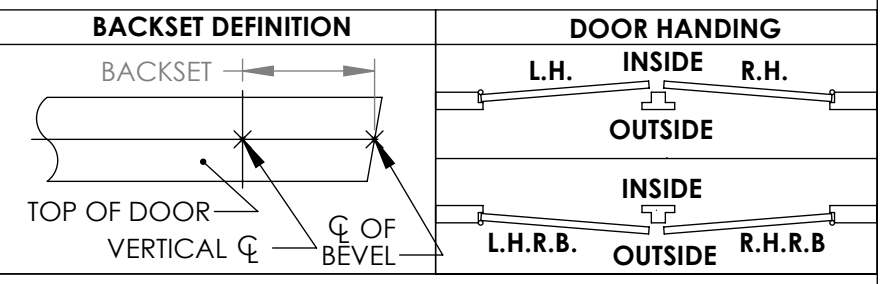

**ASSA ABLOY**  
Opening Solutions  
Experience a safer and more open world.  
assabloy.com

DOOR MANUFACTURERS TEMPLATE: IN SERIES TRIM (STD. ON-CENTER) WOOD DOOR SVR EXIT DEVICE

RELEASE DATE: 10/16/2023

TEMPLATE NO.: MEDT69\_3

SHEET 4 OF 4