

DBF Series Grade 1 Deadbolt Locks



"LOCK" INTO THE LEADER





DBF Series Grade 1 Deadbolt Locks

DBF Series is a heavy duty commercial quality deadbolt that provides a positive deterrent to forced entry.

Designed for maximum security, the cylinder recesses into the door to resist blows attempting to move the lock.

SPECIFICATIONS

APPLICATIONS To use as an auxiliary lock for quality residential and

commercial buildings wherever additional security is desired.

DOOR RANGES 1-3/8" to 2" door thickness.

BACKSET 2-3/4" standard, 2-3/8" optional.

BOLT UL Listed, 1" throw, stainless steel deadbolt.

STRIKE 2-3/4" x 1-1/8" lipless.

FINISHES US26D, US26, US10, US10B, US3.

FACEPLATE 2-3/4" backset standard with 2-1/4" x 1-1/8" faceplate;

2-3/8" backset with 2-1/4" x 1" faceplate.

BORE DIAMETER 1" edge bore for latch; 2-1/8" for lock.

HANDING Completely reversible.

CYLINDER Regular: 6-pin Schlage C keyway.

I.C. CORE Fits Falcon and BEST I.C. cylinder.

CERTIFICATIONS Meets or exceeds ANSI A156.5 Grade 1 strength

and operational requirements.








Double Regular Cylinder



Model No. DBFI-62 Double I.C. Cylinder

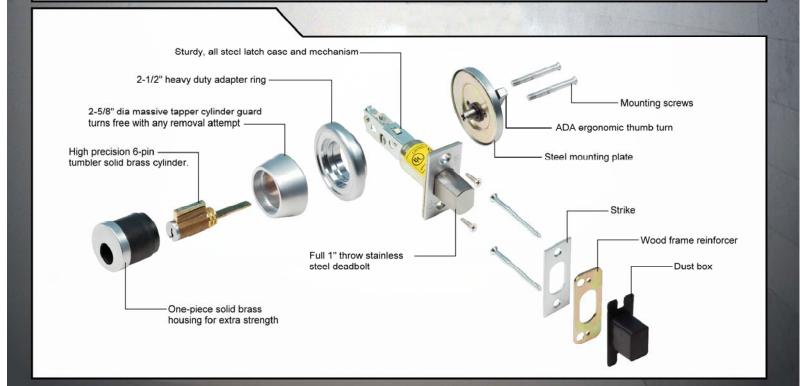

How to Order

Series	Function	Finish	Backset	Keying	Order Sample
IDBEI: Heavy duty deadholf W/SEIC	F-61: Single Cylinder, w/Thumb Turn F-62: Double Cylinder	613/US10B Oxidized Satin Bronze, Oil Rubbed 626/US26D Satin Chrome Other finishes upon request	2-3/4", 2-3/8" optional	KD: Key Different KA: Key Alike MK: Master Keyed GMK: Grand Master Keyed	DBF-61-613-2-3/4-MK Series Finish Keying Backset Function