

ADVANTEX® 30 SERIES (MORTISE)

RATING

For no rating, leave blank
 "F" = Fire Rated (Less/No Dogging Only)

OUTSIDE TRIM / DEVICE FINISH

- 605 = Polished brass (PVD)
- 606 = Brushed brass (PVD)
- 611 = Polished bronze (PVD)
- 612 = Brushed bronze (PVD)
- 613 = Oil rubbed bronze
- 625 = Polished chrome
- 626 = Brushed chrome (std. on lever trims)
- 628 = Aluminum, powder coated (device only)
- 629 = Polished stainless steel
- 630 = Brushed stainless steel (std. on pull trims & device)
- 693 = Black, powder coated
- 695 = Dark bronze, powder coated

STRIKES

- 90 = Non-handed curved lip
- 91 = ANSI flat lip
- 92 = Double door short open back
- 93 = Double door long open back

DOGGING FUNCTION

- LD = Less/No dogging
- HD = Hex key dogging
- CD = Cylinder key dogging

PRE-INSTALLED CYLINDERS

- If cylinders provided by others, leave blank
- MC65 = Mortise Cylinder(s) 6pin/Keyed 5
 - IC7 = Mortise Cylinder(s) SFIC housing
 - IK7 = Mortise Cylinder(s) InstaKey housing
 - RC65 = Rim Cylinder(s) 6pin/Keyed 5
 - IC7R = Rim Cylinder(s) SFIC housing
 - IK7R = Rim Cylinder(s) InstaKey housing

POWER TRANSFERS

- For no power transfers, leave blank
- FC3 = 3' Flex Conduit
 - FC10 = 10' Flex Conduit
 - PT5 = Power Transfer
 - EH8 = Electric Hinge

FASTENERS

- For standard machine, wood & self-drilling screws, leave blank
- SN1 = Sex Nuts/Throughbolts

SILENCER

- For standard pushpad, leave blank
- SLR = Silent Latch & Pushpad

ENDCAP


- EC1 = Ramped endcap*
- EC2 = Flush endcap

ANTIMICROBIAL

- For no coating, leave blank
- AM = Antimicrobial Coating

DOOR WIDTH

- 24" wide door
- 30" wide door
- 36" wide door (3')*
- 48" wide door (4')

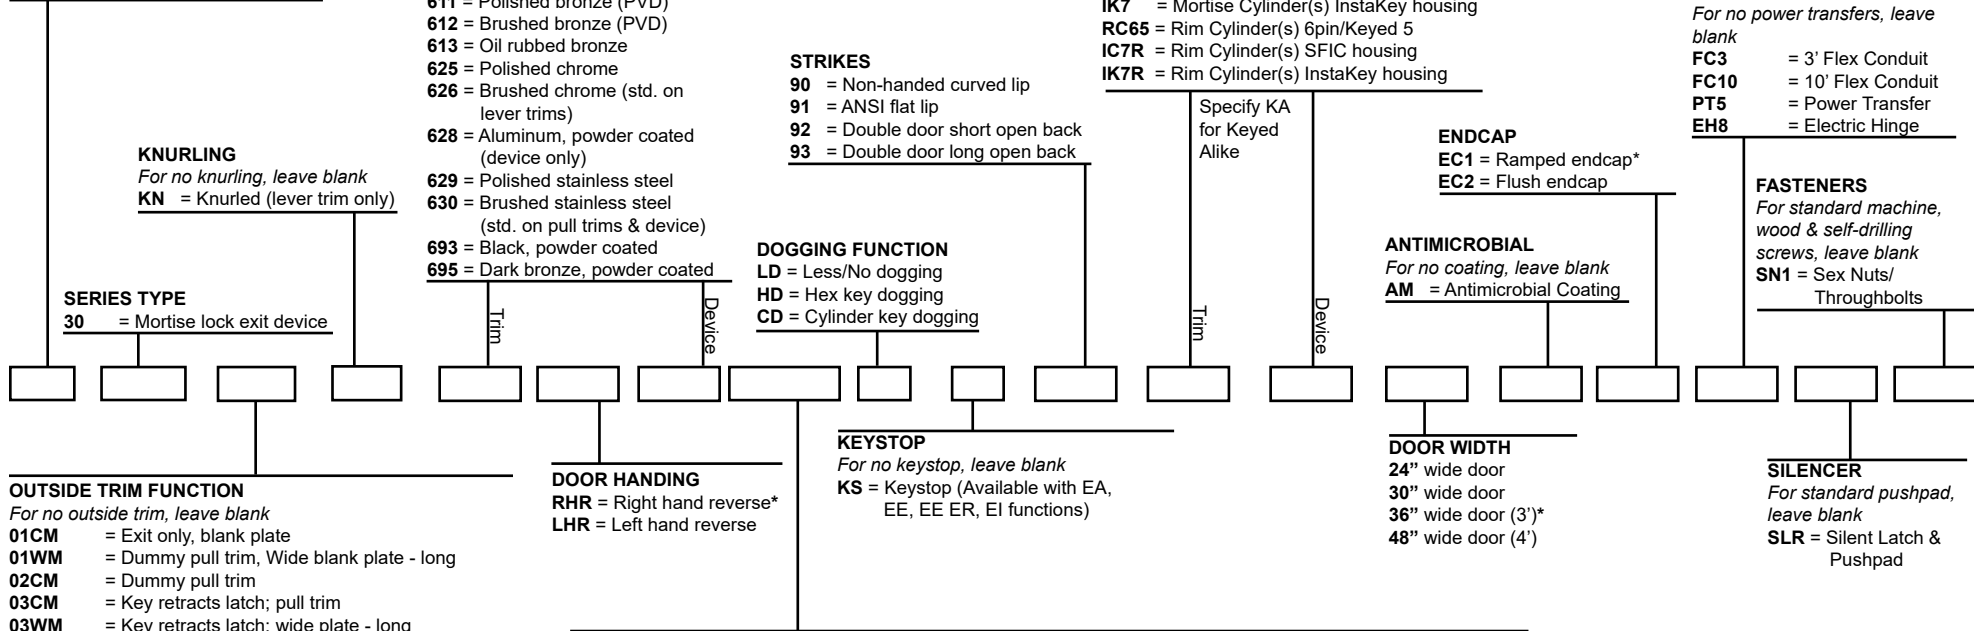

OUTSIDE TRIM FUNCTION

- For no outside trim, leave blank
- 01CM = Exit only, blank plate
 - 01WM = Dummy pull trim, Wide blank plate - long
 - 02CM = Dummy pull trim
 - 03CM = Key retracts latch; pull trim
 - 03WM = Key retracts latch; wide plate - long
 - 02DM = Dummy lever trim
 - 08DM = Active lever, key locks / unlocks lever; Wide lever handle (handed) (J, Q, S, T, U or FSB1076 lever**) (classroom)
 - 09DM = Lever trim active by key, locked when key removed; Wide lever handle (handed) (J, Q, S, T, U or FSB1076 lever**) (storeroom)
 - 10DM = Double cylinder; Wide lever handle (handed) (J, Q, S, T, U or FSB1076 lever**)
 - 14DM = Active lever, no key cylinder; Wide lever handle (handed) (J, Q, S, T, U or FSB1076 lever**) (passage)
 - CBK = Cylinder bracket kit, 03 only, plate & pull handle by others required
 - EUxDM = Electric Unlock Trim (24VDC & Fail Secure [FSE] Std.) - Specify handing (not field reversible). For 12VDC specify 12VDC. For Fail Safe specify FSA

DOOR HANDING

- RHR = Right hand reverse*
- LHR = Left hand reverse

KEYSTOP

- For no keystone, leave blank
- KS = Keystop (Available with EA, EE, EE ER, EI functions)

ELECTRIFIED FUNCTION

For no electrified function, leave blank

Standard

- Select Arming Time and Auto Rearm
- EA = Hardwired Electric Alarm
 - EA EX = Exit Alarm with Request To Exit (Signal) Switch
 - EA EXV = Exit Alarm with Request To Exit (3Amp Current) Switch
 - ED = Electric Dogging
 - EX = Request To Exit (Signal) Switch
 - EXV = Request To Exit (3Amp Current) Switch
 - ES = Electric Switching (dead latch & OKC switches)

Delayed Egress

- Select Arming Delay, Delayed Egress Time and Silent Arming
- EE = Delayed Egress

Power Supply for Delayed Egress

- Comes standard with 90-800 power supply
- Single = (1) 90-800 w/o bat backup
 - Pair = (1) 90-800 w/o bat backup

Latch Retraction

- ER EX = Electric Latch Retraction with Request To Exit Switch (silencer standard)

Power Supply / Controller for Latch Retraction Only (ER EX)

- Order/Sold Separately
- Single = 81-800
 - Pair = 82-800
 - 2 Independent Singles = 83-800

Delayed Egress/Latch Retraction

- EE ER = Delayed Egress with Electric Latch Retraction (silencer standard)

Required Power Supply / Controller for Delayed Egress with Latch Retraction (EE ER)

- Order/Sold Separately
- Single EE ER = 84-800
 - Pair of EE ER = 85-800
 - One EE ER and One EE = 85-800 EE
 - One EE ER and One ER = 85-800 ER

Fire-rated trims must be fail safe (FSA)

**Other FSB levers available: 1016, 1035, 1058, 1075, 1093, 1119, 1147. FSB levers available in 630 finish only. See catalog pages for more information.

NOTE: * = default/standard

Also see online version at detex.com/hto

November 2, 2021

