
## **ValueSeries**® V40 SERIES (RIM)

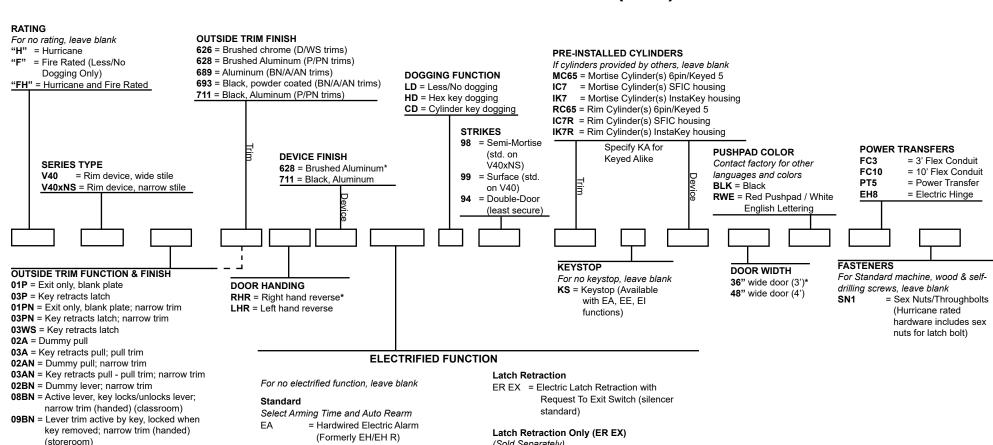

(Sold Separately)

2 Single = 83-800

Single = 81-800

Pair = 82-800

OKC switches)

EΒ

ED

ΕX

EXV

ΕI

ES

**14BN** = Active lever, no key cylinder; narrow trim

02D2W = Dummy lever; wide trim (two posts for

head device) (classroom)

**09D2W** = Lever trim active by key, locked when

**14D2W** = Active lever, no key cylinder; wide trim

**EU2W** = Electric lock/unlock: wide trim (two posts

for use with narrow head device) -

24VDC & Fail Secure (FSE) Std. -

CBK = Cylinder Bracket Kit, 03 only, plate & pull handle by others required

Specify handing (not field reversible).

For 12VDC specify VDC. For Fail Safe

use with narrow head device) **08D2W** = Active lever, key locks/unlocks lever:

wide trim (two posts for use with narrow

key removed; wide trim (two posts for use with narrow head device)

(two posts for use with narrow head

(handed) (passage)

(storeroom)

specify FSA

NOTE: \* = default/standard

device) (passage)

## **Delayed Egress**

Select Arming Delay, Delayed Egress Time and Silent Arming

required)

= Delayed Egress

Delayed Egress Only (EE)

Comes standard with 90-800 power supply Single = (1) 90-800 w/o bat backup Pair = (1) 90-800 w/o bat backup

= Electric Alarm with Battery

= Request To Exit (Signal) Switch

= Request To Exit (Current) Switch

= Electric Switching (dead latch &

= Electric Integration (logic controller

= Electric Dogging

Also see online version at detex.com/hto

Detex products can expose you to chemicals including Chromium (hexavalent compounds) and Lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.detex.com/prop65