



INACTIVE DOOR WITHOUT STRIKE

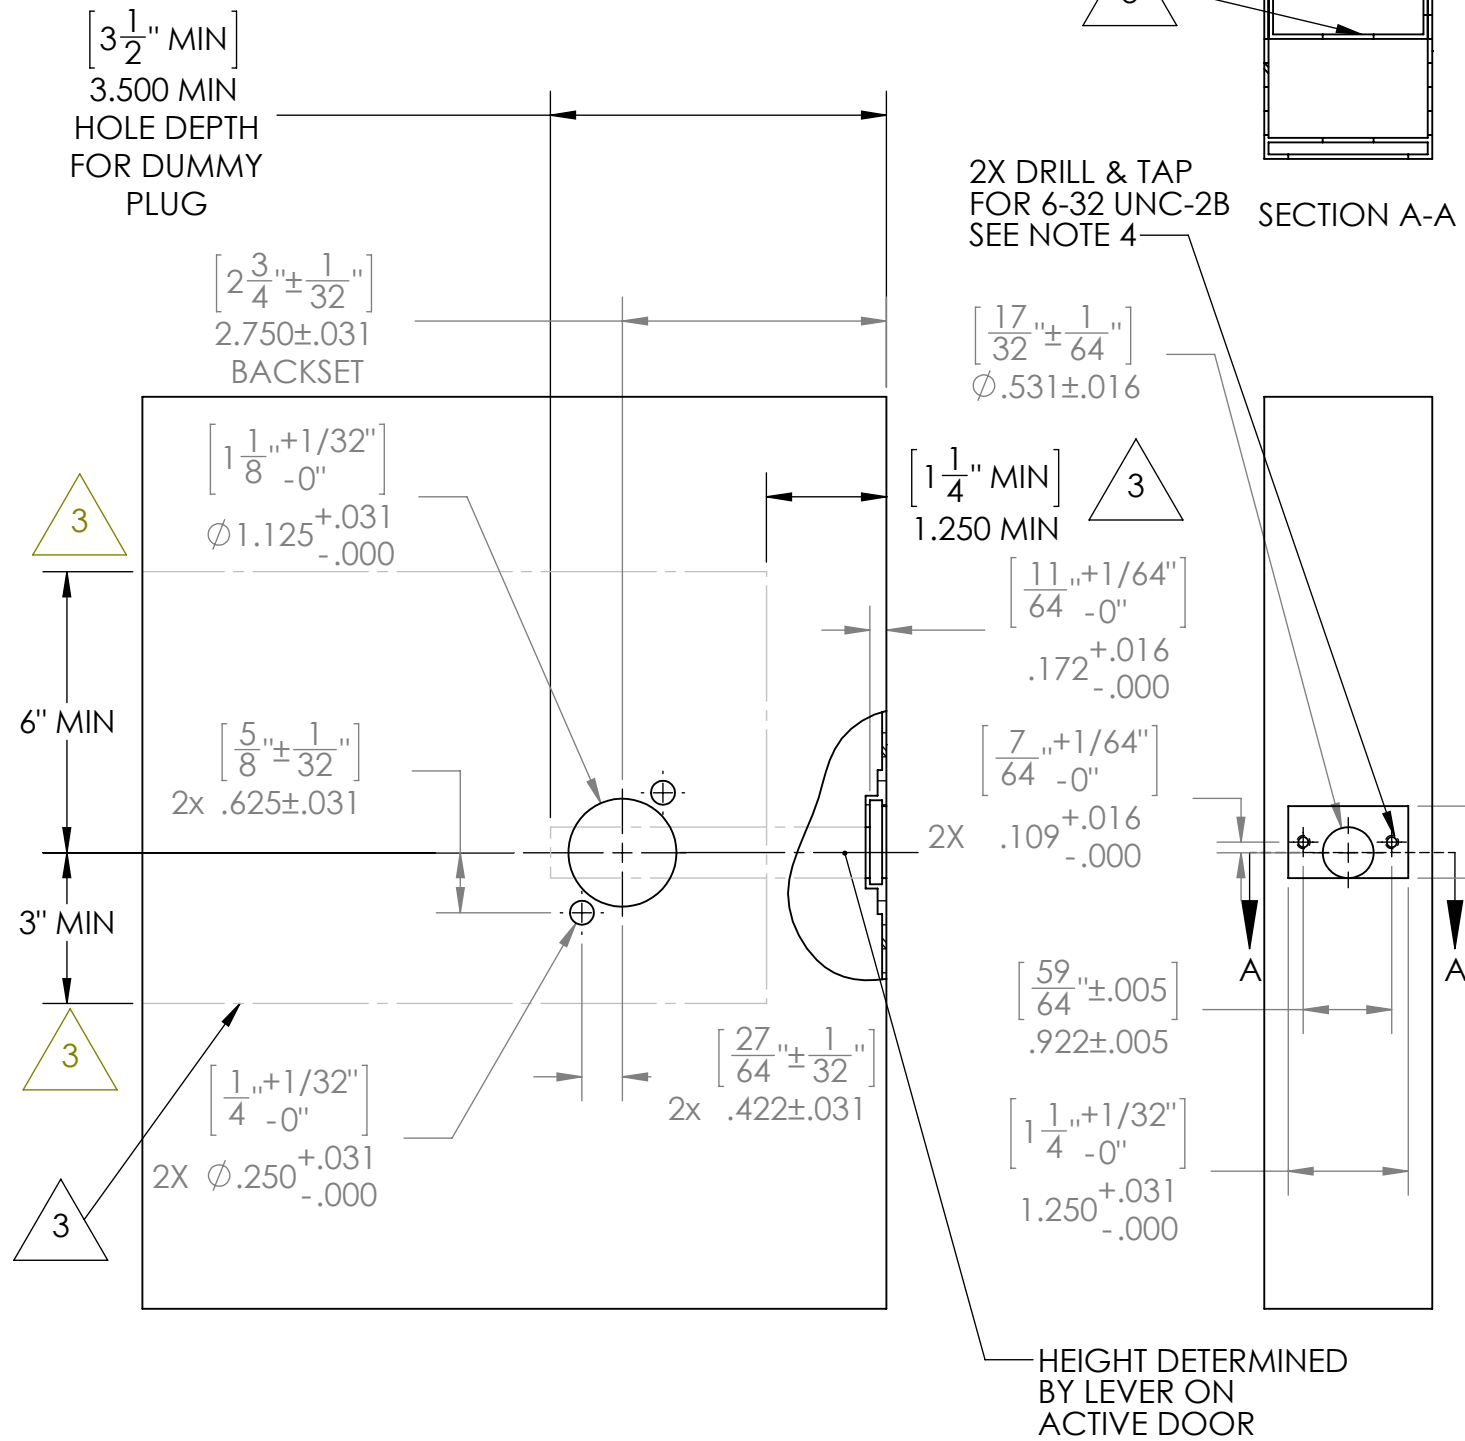

ACTIVE DOOR WITH STRIKE

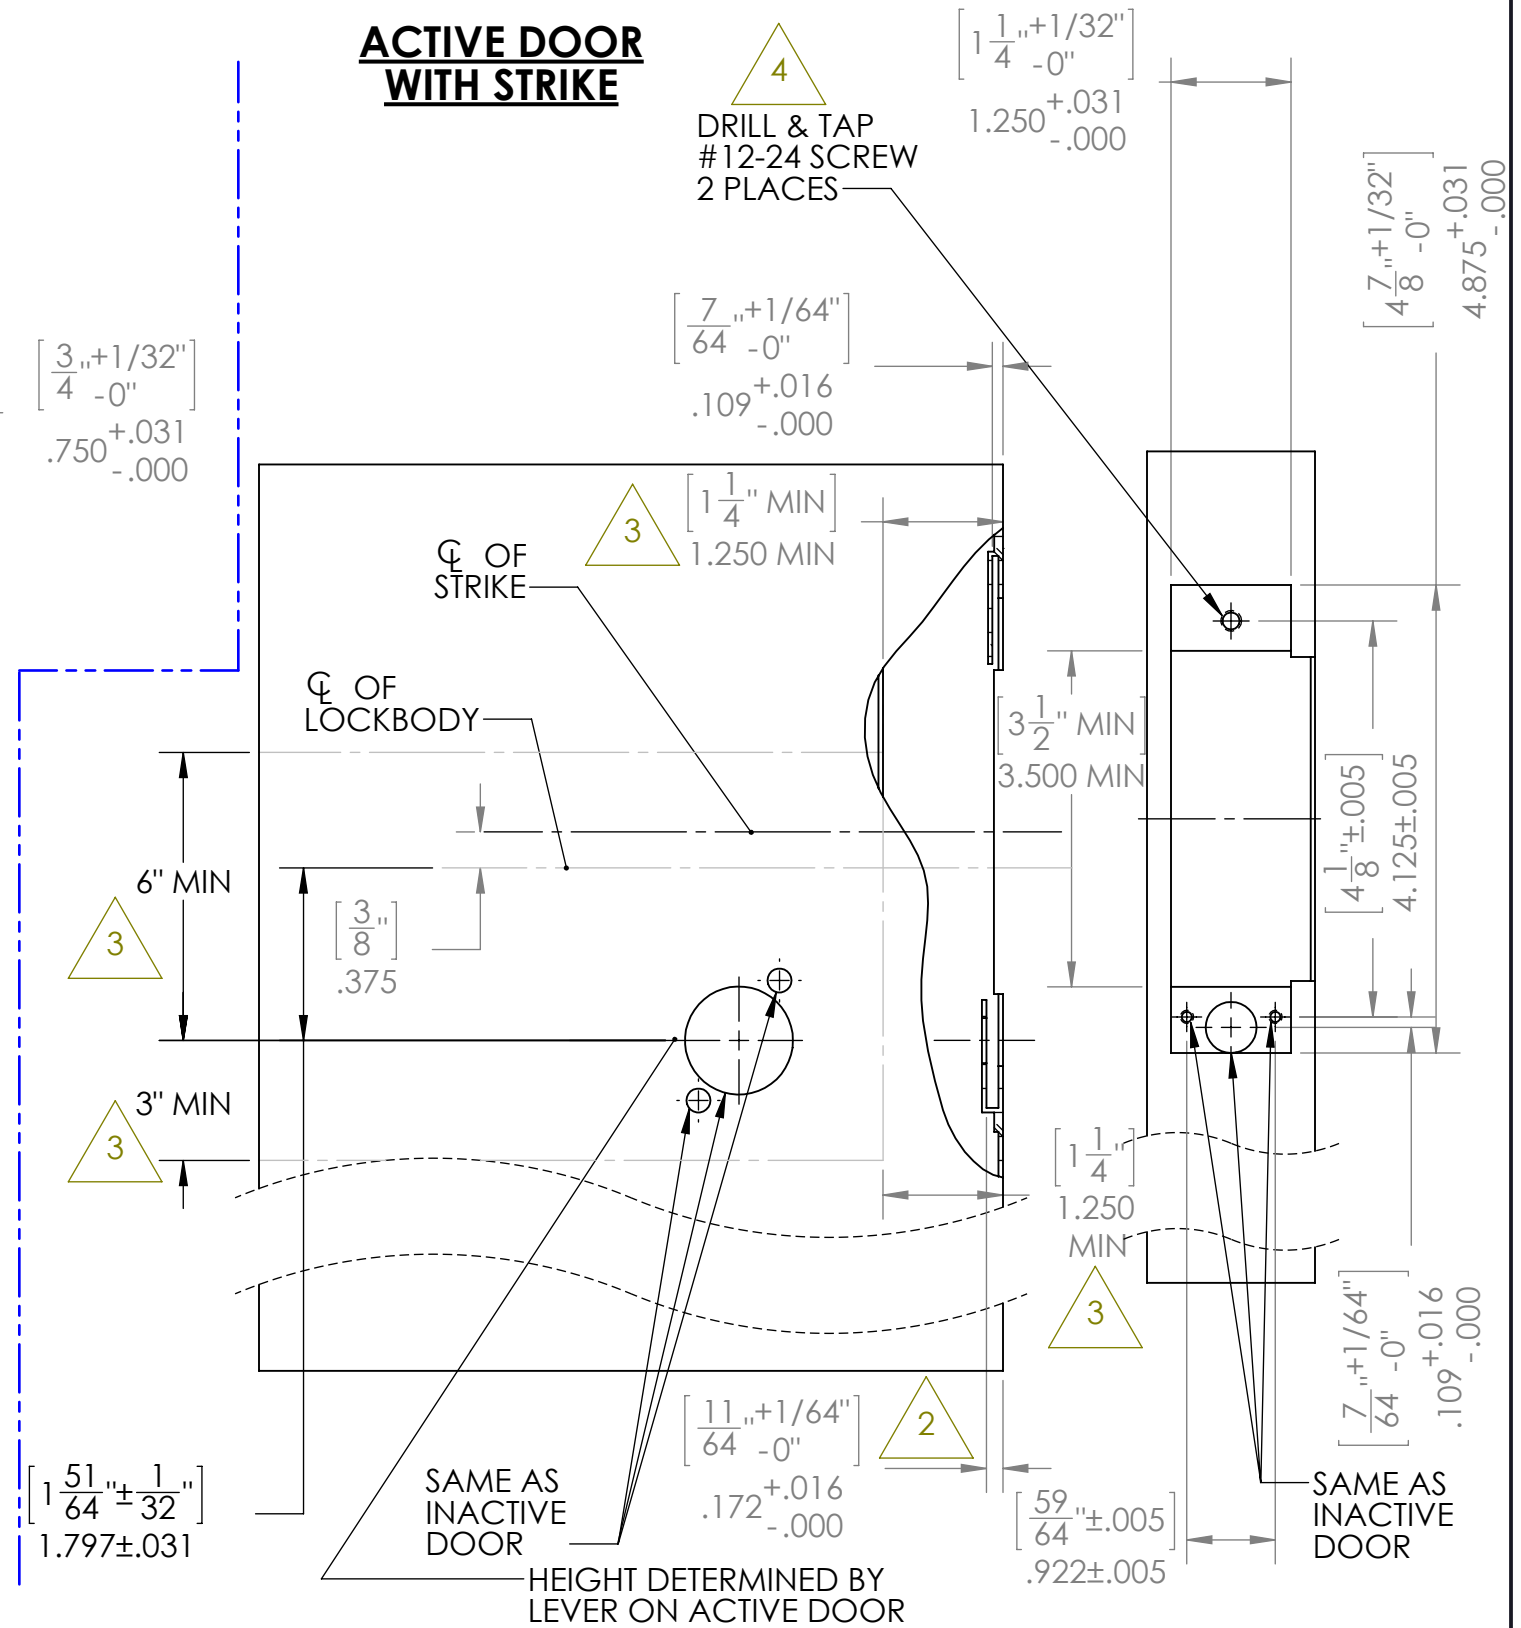

- NOTES:
1. FOR USE WITH 7893, 7894, 7993, 7994, 8293 & 8294 FUNCTIONS ONLY. FOR ALL OTHER FUNCTIONS SEE TEMPLATES A7050 & 7057.
 2. FOR INACTIVE DOOR WITH A STRIKE, LOWER MOUNTING SURFACE PLATE MUST BE SET 1/16" DEEPER THAN UPPER STRIKE MOUNTING SURFACE PLATE TO ACCOMODATE 1/16" THICKNESS OF PLATE IN DUMMY PLUG.
 3. SUITABLE REINFORCEMENT IN AREA SHOWN TO PREVENT BOWING OF DOOR SURFACES.
 4. FOR WOOD DOORS LATCHBOLT FRONT HOLES MAY BE FIELD DRILLED.

SARGENT Manufacturing Company 100 Sargent Drive New Haven, CT 06511	
TEMPLATE: DUMMY TRIM FOR 7800, 7900 & 8200 SERIES 93 AND 94 FUNCTIONS	RELEASE DATE 22 DEC 17
	TEMPLATE NO. 4298H