


# SPECIFICATIONS

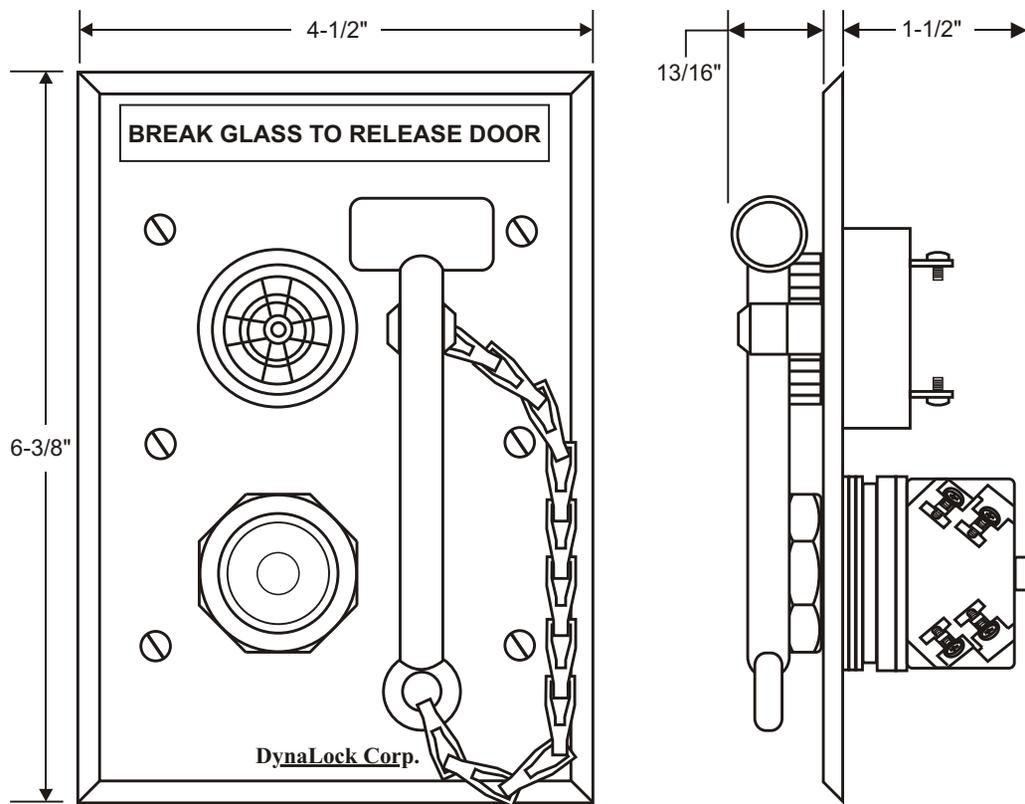

## DYNALOCK MODEL #7077 EMERGENCY BREAK GLASS RELEASE

BREAK GLASS SWITCH ASSEMBLY WITH HAMMER MOUNTED ON A THREE-GANG STAINLESS STEEL FACEPLATE. FURNISHED WITH 5 SPARE GLASS LENSES.


NORMALLY-OPEN (NO) AND NORMALLY CLOSED (NC) CONTACTS RATED 6 AMPS @ 120VAC, WITH COMBINATION-HEAD SCREW TERMINAL CONNECTORS.

INCLUDES AUDIBLE ANNUNCIATOR WITH SCREW LUG TERMINAL CONNECTORS. OPERATING VOLTAGE: 1-28VDC; OUTPUT LEVEL: 93 dB @ 12 INCHES.


# WIRING INFORMATION

## SWITCH WIRING

**A** CONTACTS STATE WITH GLASS IN PLACE




**B** CONTACTS STATE WITH GLASS BROKEN



CONTACTS RATED  
6 AMPS @ 120VAC

## AUDIBLE WIRING



OPERATING VOLTAGE  
1 - 28VDC @ 15 mA

**DynaLock Corp.**

705 Emmett Street  
Forestville, CT 06010

TITLE

MODEL #7077 EMERGENCY BREAK GLASS  
LOCK RELEASE STATION

DRN. BY JAS

DATE 06/22/98

SCALE —

DWG. NO.

600198