

7350 Series

Stand Alone Digital Keypad



- **Weather and Vandal Resistant**
- **Highly Sensitive Piezoelectric Keypad**
- **Up to 500 User Codes**
- **Built In Tamper Detection**
- **Narrow Mullion Design**
- **Lifetime Warranty**

Description

The rugged DynaLock 7350 vandal-resistant, stand alone keypad is designed to be a cost effective access solution for harsh industrial, institutional and commercial environments. It will store 1 to 500 user PIN codes, with up to three access levels for each.

The 7350 features a user-friendly setup menu, which makes configuration and use very simple for end-users. A wide array of functions and auxiliary modes provide extra flexibility and security, allowing it to operate as a single or two-door access controller.

The 7350 is completely epoxy filled and incorporates a sturdy, metal, vandal-resistant casing. The sealed, all metal piezoelectric keypad is easy to clean and ideal for a wide spectrum of applications, ranging from hospitals to mass transportation. A flexible power input allows the unit to operate on 12-24VDC or 16-24VAC. Two Form-C relay outputs, rated at 2 amps, as well as REX and Auxiliary inputs are provided.

Standard Features

- **500 User Codes:** Up to 500 codes can be programmed using one of two easy enrolling methods.
- **Flexible Power Input:** 12-24 VDC or 16-24VAC.
- **3 User and Access Levels:** Program one to three different levels of access for each individual user or for the entire system.
- **Multiple Inputs and Outputs:** Unit includes a REX and Auxiliary input as well as two form C output contacts rated at 2 Amps.
- **Audio and Visual Recognition:** Equipped with an internal sounder and two tri-colored status/programming LED's.
- **Multiple Auxiliary Modes:** Ten programmable auxiliary modes including: Door Ajar, Forced Door, Alarm Shunt, and Door Monitor.
- **IP65 Rated:** Fully sealed metal enclosure, built to withstand the elements.
- **Vandal Resistant:** Metal casing with a built in optical tamper sensor.
- **Installer Friendly:** Includes an installation kit and self-adhesive mounting template.
- **Lifetime Warranty**

7350 Series Digital Keypad

Specifications

Physical Characteristics

Size: 5.91" H x 1.65" L x 1.06" W
Weight: 0.9 lbs
Material: Vandal-resistant metal
Cable: 18AWG/10-Conductor, 3 Ft long

Electrical Characteristics

Voltage Range: 12-24VDC, From a power supply
16-24VAC, From a transformer
Input Current: Standby: 35mA at 12VDC
Maximum: 90mA at 12VDC
Relay Outputs: Main: 3A Form C, N.O. and N.C.
Auxiliary: 3A Form C, N.O. and N.C.
Tamper: Optical back tamper sensor
Inputs: REX: N.O. dry contact
Auxiliary (In/Monitor): N.O. dry contact
10 programmable modes

Environmental Characteristics


Operation: Water resistant, suitable for outdoor use
Meets IP65
Temperature: -40°C to 65°C (-40°F to 150°F)
Humidity: 0 to 95% (non-condensing)
RFI Protection: >20V/m up to 1000Mhz

Operational Characteristics:

Capacity: 500 users, single/dual code for each
Keypad: 2x6 key pad for local programming
4 to 8 digit PIN code entry
User Levels: Normal/Secure/Master



**Vandal-Resistant
Piezoelectric Keypad**

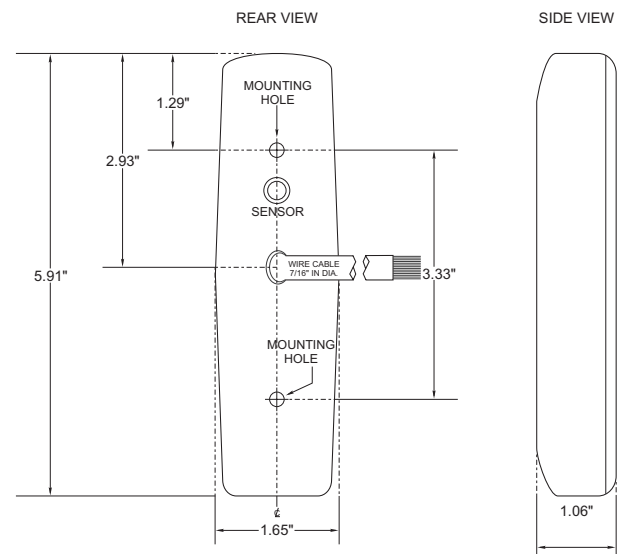

DYNALOCK CORPORATION
705 EMMETT STREET / PO BOX 2728
BRISTOL, CT 06011-2728
PHONE: 877-DYNALOCK / FAX: 860-585-0338
E-MAIL: INFO@DYNALOCK.COM
WEBSITE: WWW.DYNALOCK.COM

Featuring

DynaLife[®]
Lifetime Warranty