


NOTES:

- FOR DIMENSIONS AND TOLERANCES REFER TO CORRESPONDING DOOR PREPARATION DRAWING #IP-
- ALL DIMS ARE IN INCHES [millimeters]
- FOLDING LINES HIGH (H) AND LOW (L) FOR BEVEL EDGES SHOWN ARE FOR DOOR WITH 3° BEVEL ANGLE
- SYMBOLS: - ∇ DEEP
- ∇ CENTER LINE OF DOOR
- \varnothing DIAMETER

HOLE ID	DIM INCH	DIM mm	COMMENTS
A	\varnothing 1/2	\varnothing 12,7	-
B	\varnothing 1	\varnothing 25,4	-
C	\varnothing 1/8	\varnothing 3,2	∇ 7/8 [22,2]
D	\varnothing 1/2	\varnothing 12,7	ONLY IF THUMB TURN
E	∇ 1	∇ 25,4	ONLY IF RH OR LHR
F	∇ 1	∇ 25,4	ONLY IF LH OR RHR
G	\varnothing 3/4	\varnothing 19,1	ONLY MODELS WITH WIRES THROUGH THE DOOR

UNLESS OTHERWISE NOTED, DRILL HALF DOOR THICKNESS ON BOTH SIDES.

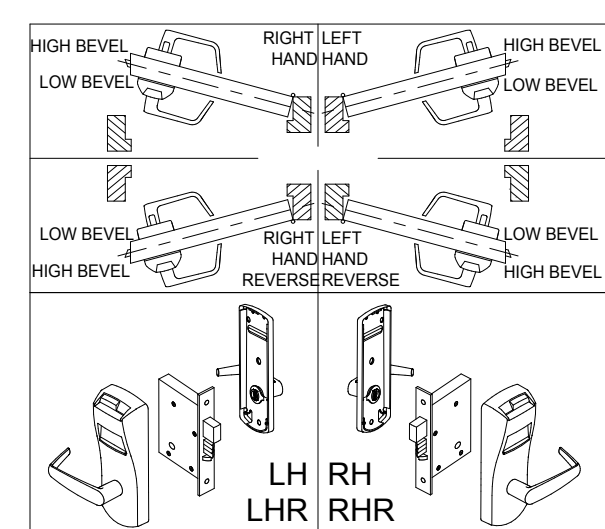

660, 660i, 760, 770, 790, 76, 79,
E-PLEX 2000, POWER-PLEX 2000 &
E-PLEX 7900 LOCK SERIES

DRILLING TEMPLATE
MORTISE ASM - 1" FACE PLATE



www.kabalodgingsupport.com

DO NOT REPRODUCE
CONTACT CUSTOMER SUPPORT
ILCO 1-877-468-3555
SAFLOK 1-800-999-6213
E-PLEX POWER-PLEX
1-800-849-8324

SHEET 1 OF 1	DATE 20SE17	UNE VERSION FRANCAISE DE CE DOCUMENT EST DISPONIBLE SUR DEMANDE.	
	ECN 16312	DT-514986	REV-2