



EXIT CHECK® DELAYED EGRESS LOCKS

DELAYED EGRESS LOCK

Exit Check® Delayed Egress Lock Proprietary Features:

- Voice and digital display provides informative annunciation for people without prior knowledge, including the blind and hearing impaired
- Field selectable voice & tone or tone only
- Voice provides warning or safety message, countdown and time of door release
- Digital countdown display also indicates if door was open after lock release.
- Fixed 15 second delay or selectable 15 or 30 second exit delay

**PUSH UNTIL ALARM
SOUNDS. DOOR CAN BE
OPENED IN 15 SECONDS.**



Application

Airport & Public Facility Security & Safety Control pedestrian traffic in government, public facilities and transportation facilities, including airport jetways and tarmacs.

Loss Prevention

Provide theft protection of merchandise, technology and other valuables such as, art and museum artifacts.

Wandering Patient and Infant Protection Restrict the egress of psychiatric and drug rehab patients, elderly patients in assisted living facilities and restrict the movement of nursery infants for their own safety and security.

Operation

Typically used on exit doors, when unauthorized egress is initiated when in the locked mode, the IDC Exit Check® delays egress through the door for 15 or 30 seconds. Meanwhile, the person exiting must wait while personnel or security respond. The door unlocks after 15 seconds have elapsed, permitting egress. A signal from the fire life safety system will release the lock for uninhibited egress in an emergency. 30 second delay available where approved.

Facility Applications

- Airports
- Convention Halls
- Wholesale Stores
- Retail Stores
- Long Term Care
- Drug Rehab
- Psychiatric Care
- Infant Nurseries
- Museums
- Art Galleries
- Warehouses
- Technology Facility

Code Compliance

Exit Check® models comply with today's building and fire life safety codes. See page 4

IBC, International Building Code
1008.1.8.6 Delayed Egress Locks

IFC, International Fire Code
1008.1.8.6 Delayed Egress Locks

NFPA 101, Life Safety Code
7-2.1.6.1 Delayed Egress Lock

CBC, California Building Code
1008.1.8.6 Special Egress Control Devices

BOCA, National Building Code
1017.4.1.2 Special Locking Arrangements

Chicago Building Code
10 (13-160-269) Electro-Magnetic Locking Devices. Certificate of approval available

Patient & Infant Tracking Systems

The IDC Exit Check® is compatible with patient tracking systems, like those used for protection against infant abduction from hospital nurseries, and for the protection of patients in long term care facilities who may be endangered if they leave their care facility without supervision.

Access Control


Access controls may be utilized for authorized egress, access and lock reset. Access from the exterior of latching doors requires an additional means of mechanical lock release, such as a mechanical key or electric strike.

Local Approval

All installations must be approved by the Authority Having Jurisdiction (AHJ).



FWAX Special Locking Arrangements
GWXT Auxiliary Locks

 UL10C Positive Pressure Compliant
UBC Classified in accordance with Uniform Building Code standard 7-2 "Fire Test for Door Assemblies"



MADE IN THE USA



3774-0324:103
California State
Fire Marshal Listed



ANSI/BHMA A156.24
Grade 1

American National Standard
for Delayed Egress Locks

Protected by one or more of the following U.S. Patents:
5,429,399 4,609,910

International Door Closers, Inc.

COPYRIGHT 2018 INTERNATIONAL DOOR CLOSERS, INC



West: 800-544-4422 • East: 800-225-6737

www.intldoorclosers.com

Single Model

For use with single doors equipped with:




- Mortise or rim mount exit devices
- Surface or concealed vertical rod exit devices with surface or concealed strikes and triggers
- Mortise or cylindrical locksets



Tandem Model

Activating either door unlocks both doors.
For use with pairs of doors equipped with:

- Mortise or rim mount exit devices
- Surface or concealed vertical rod exit devices with surface or concealed strikes and triggers
- Mortise or cylindrical locksets

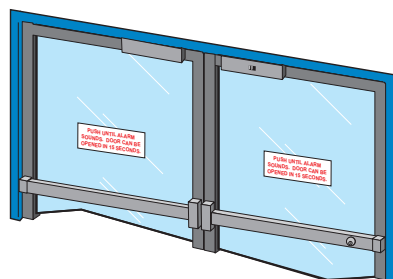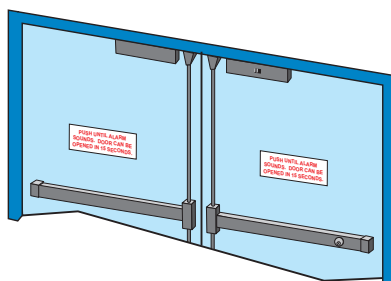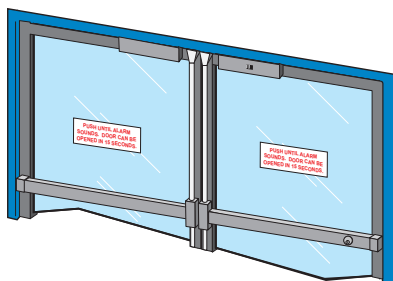

Code Compliant Door Sign



Verbal and Digital Annunciation

The Exit Check® series incorporates an alternating verbal message, verbal count-down and alarm tone, plus a large digital countdown display and door release indicator that provides a clear warning for the safety of persons without prior knowledge of door operation, including the blind and hearing impaired.

Features

- Field selectable voice message and alarm tone, or alarm tone only, 75 db @ 3 ft
- The visual display provides a digital countdown, indicates lock release and verifies if the door was opened for egress.
- Choice of fixed 15 second exit and 1 second nuisance delay or field selectable 15 or 30 second exit delay and 1 or 2 second nuisance delay
- Field selectable security or safety message
- Field selectable activation:
 - Door movement
 - Exit device with switch kit
 - Exit sense bar for non-latching doors
- Field selectable automatic or manual power up after emergency release or power loss.
- Integrated 3 position key switch provides:
 - Lock and alarm reset
 - Manual power-up*
 - Sustained bypass
 - Timed bypass, adj. for 1, 15, 20 or 30 seconds
- Field selectable door prop alarm:
 - Alarm sounds when door is left open after selected bypass time has elapsed.
- Anti-tailgate feature
- Single or multi-door zone control and reset capability

Control Inputs

- Remote access control and REX input, field adjustable for 1, 15, 20 or 30 seconds
- Remote reset input
- Manual power-up input*
- Emergency release input
- Anti-tailgate input

Monitoring Outputs


- Door secure and unlocked output
- Delayed egress activation alarm output

Options


- Custom message, language or shortened exit delay times
- Energy Saver, 1200lb holding force 400/275mA @ 12/24VDC
- Magnetic Bond Sensor output
- Door Status Sensor output
- Anti-tamper sensor output

* Not available with (BD) Chicago and BOCA code compliant models


Component Consideration

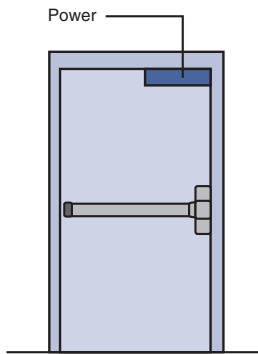


Door Movement Trigger by Latching Exit Device
Rim Mount, Mortise, or Vertical Rod

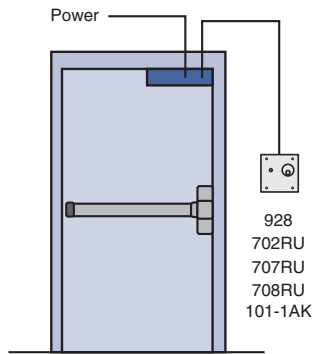


Optional Wall Mount Key Reset
(Built-In Key Reset Standard)

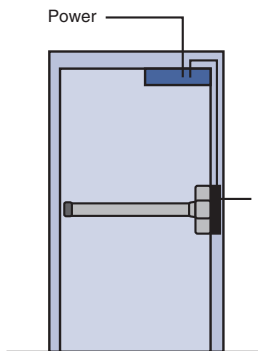


Latch Monitoring Strike Trigger
For Mortise Exit Devices or Lock

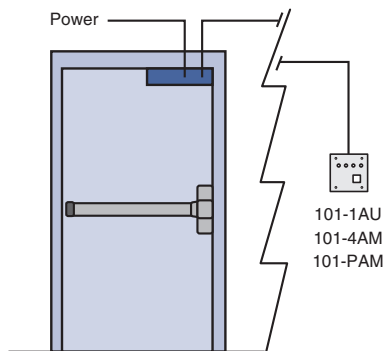

Remote Wall Mount Annunciator



Sense Bar Trigger Non-Latching
PSB560, MSB550

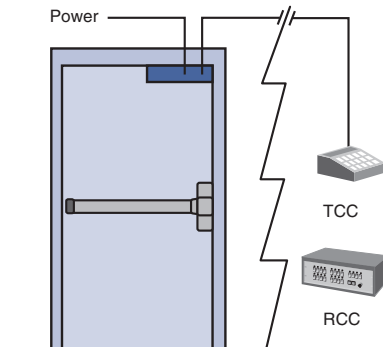


Remote Desktop Annunciator
and Control Panel

Emergency Release Modes

Dual Emergency Release


IDC 600 Series Power Supply and
Integrated Lock Emergency Release

- Field Selectable Lock Auto Reset or Lock Manual Key Reset
- Field Selectable Power Supply Output
- **Automatic reset standard, see *MR option for manual reset.**

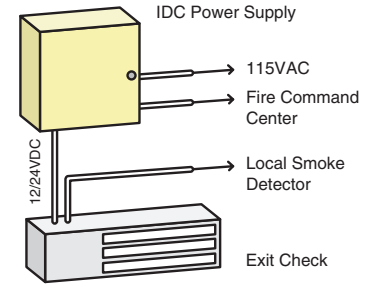


IDC 600 Series Power Supply Emergency Release

- Field Selectable Lock Auto Reset or Lock Manual Key Reset
- Field Selectable Power Supply Output
- **Automatic reset standard, see *MR option for manual reset.**

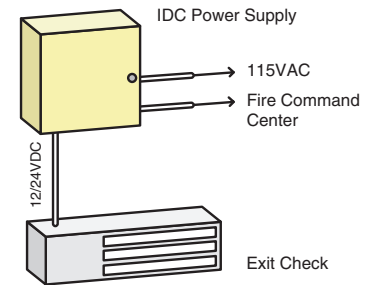

Integrated Lock Emergency Release

- Field Selectable Lock Auto Reset or Lock Manual Key Reset
- Field Selectable Power Supply Output
- **Automatic reset standard, see *MR option for manual reset.**

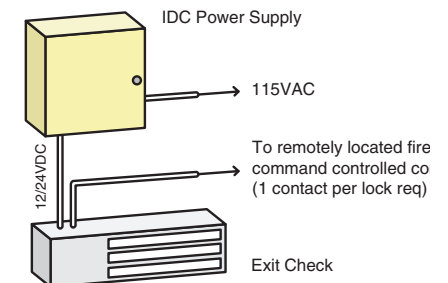

*Emergency Release Manual Reset
Not Available with 631RF Power Supply

West: 800-544-4422 • East: 800-225-6737
www.intldoorclosers.com

Station Controls and Annunciators

While the Exit Check® is equipped with a standard built-in key switch for reset and bypass functions, wall mounted stations provide for convenient alarm reset, sustained bypass or timed bypass.

Remote annunciators provide quick identification of activated openings, enabling security or care personnel to respond rapidly. Annunciators are equipped with an audible alarm and each station is identified by one tri-color LED that identifies specific mode status.

Secure -Green

Activation - Amber x Audible Tone

Unlocked - Red x Audible Tone



928

702RU

708RU

928 Keypad (see page 3)

702RU Alarm Reset & Manual Power-Up Key Switch

708RU Alarm Reset, Manual Power Up & Bypass Key Switch



101-1A



101-PAM

Visual and audible annunciation, timed access, sustained bypass, and audible mute.



101-AK

Visual and audible annunciation and key switch for alarm reset, manual power up and sustained bypass.



101-4AM

Provides visual and audible annunciation with audible mute for two, three or four openings.

Consoles, Desktop and Rack Mount

IDC control and annunciator panels provide remote annunciation of multiple openings. Stations are specified in sets of four. Control switches are also available and capable of providing both sustained bypass and timed unlocking of individual doors. Consult the factory or refer to IDC control console datasheets for additional specifications.



TCC Desk Top

Stations: 4, 8 & 12



RCC

Rack Mount Stations:
4 - 20



CAB Desk Top Cabinet

CAB7: Accommodates 1 RCC
CAB12: Accommodates 2 RCC

Latch Strikes Trigger

MS-16 For mortise latch, reversible



- Fits 4.875" Strike (provided by others)
- Gap & alignment adj.
- SPDT, 5 Amps @ 30VDC

Power Transfer Loops



PT-2U Stainless Steel

PT-3V Aluminum termination box

PTH Power Transfer Hinge

PTH-4Q Four wires:

- 1 pair-1 Amp; 1 pair-250mA
- 4.5x4.5 five knuckle standard weight
- Dull Chrome

Sure Exit Request-to-Exit



The Sure Exit is a non-latching, heavy duty, request-to-exit push bar that will activate the Exit Check® when slight pressure is applied to the bar.

Model

PSB560V Aluminum Anodized

PSB560Y Black Anodized

Stainless steel and brass optional 36" is standard. For wider doors specify 42" or 48". May be field cut.

Specifications

Voltage Input: 12/24VDC

Current Input: 20 mA at rest, 115 mA active

Output:

Two, SPDT Dry, 3 Amp @ 28VDC

Operating Temperature: 0° - 150° F

Exit Device Switch Kits

Switch kits are field installed in the inactive hinge pad of rim mount exit devices, mortise exit devices, concealed vertical rod exit devices and surface vertical rod exit devices.



MODEL MAKE & MODEL TO BE MODIFIED

510 Von Duprin 33, 35, 98, 99

510-2 Von Duprin 33, 35, 98, 99 DPDT

511 Von Duprin 55

512 Von Duprin 88

514 Dor-O-Matic 990, 1090, 1990, 2090

516 Sargent 9600, 9700, 9800, 9900

517 Adams Rite 8300, 8400, 8700, 8800

518 Precision Apex Series 1100

518A Precision Apex Series 2100 - 2800

519 Jackson 1095

519-2 Jackson 1095 DPDT

521 Corbin 7000

525 Monarch 18 and 19

527 Sargent 80

527-2 Sargent 80 DPDT

528 Sargent 20/60 and Yale 2100

531 Yale 7000 (Dogging mechanism required)

535 Kawneer Mid Panel Line Dor-O-Matic 1390

540 Arrow 53/5400 series

542 Hager 4700

590 Dor-o-Matic 1690

Self Adjusting Door Movement Sensor

The built-in door movement sensor may only be used with doors equipped with a latch assembly, such as a mechanical lockset or exit device.

The mechanical latch mechanism must be locked on the exterior and unlocked on the interior. From the inside, retracting the door latch and applying pressure causes limited door movement. The built-in activation trigger senses the door movement and initiates delayed egress operation. The self adjusting sensor helps prevent false triggering.

External Device Trigger Input

Activation For Non-Latching Doors

The external activation trigger input must be used with doors without latch assemblies, such as latchless glass and herculite doors.

Activation may be triggered by the IDC MSB550 Switch Bar or the IDC Sure Exit®, request-to-exit push bar. A power transfer device is required. Pushing on the request-to exit push bar immediately activates the delayed egress operation.

Activation For Latching Doors

Where preferred, activation may be accomplished by a latch monitoring strike, or a switch installed in a standard latching exit device or lockset. A power transfer device is required for exit devices equipped with a trigger switch.

See IDC datasheets for detailed information on IDC MS Series Latch Monitoring Strikes, Exit Device Switch Kits and Power Transfer Devices.

Automatic or Manual Power-up

Field selectable method of lock power-up, automatic or manual, after power loss or emergency release.

Auto Power-Up

When selected, regardless of the means of deactivation, relocking of the Exit Check® occurs when power is restored and/or the fire life safety panel is reset.

Manual Power-Up

UBC, California Building Code (OSHPD) Compliant Reset

When selected, regardless of the means of deactivation, relocking of the Exit Check® is by manual means only at the door. Only after power restoration and/or fire life safety panel reset, the door may be relocked by actuating the standard built-in key reset or optional wall mounted key switch, push switch or digital keypad located adjacent to the door.

Keyless Control (optional)



928 Entry Check Digital Keypad

While the Exit Check® is equipped with a standard built-in 4 function key switch for reset, manual power up, momentary bypass and sustained bypass functions, the IDC 928 wall mounted keypad provides the convenience of keyless operation for:

- Alarm Reset
- Manual Power-Up (UBC & California required)
- Momentary or Sustained Bypass

Electrical Specifications

Input Voltage: Dual voltage Sensing
12/24 VDC ± 10%

Standard 1650lbs Holding Force

1511S 830mA @ 12VDC
450mA @ 24VDC

1511T 1500mA @ 12VDC
850mA @ 24VDC

Energy Saver 1200lbs Holding Force

1511S (E option) 400mA @ 12VDC
275mA @ 24VDC

1511T (E option) 650mA @ 12VDC
400mA @ 24VDC

Inputs

Request to Exit: Normally open, dry

Fire Alarm Release: Alarm panel closed dry contact. Opening of contact releases lock.

Monitoring Outputs

Alarm Output:

SPDT Dry, 1 Amp @ 30VDC

Lock Secure Unlocked Output:

SPDT Dry, 1 Amp @ 30VDC

DPS Door Position Status: (optional)

SPDT Dry, 250 mA @ 30VDC

BAS Magnetic Bond Status: (optional)

SPDT Dry, 250 mA @ 30VDC

ATS Anti Tamper Sensor: (optional)

SPDT Dry, 1 Amp @ 30VDC

Mechanical Specifications

BHMA Certified ANSI Grade 1 Holding Force

- 1650lbs 1511S
- 1200lbs 1511S Energy Saver

Single: 11"L x 2.75"H x 2.625"D
(279 x 70 x 67mm)

Tandem:

Master: 11"L x 2.75"H x 2.625"D
(279 x 70 x 67mm)

Slave: 11"L x 2.75"H x 2.625"D
(279 x 70 x 67mm)

Armature: 7.375"L x 2.375"H x 0.5625"D
(187 x 60 x 14mm)

Single or Tandem

Models are available to accommodate single and pairs of doors.



S (Single)



T (Tandem)

Mounting Detail

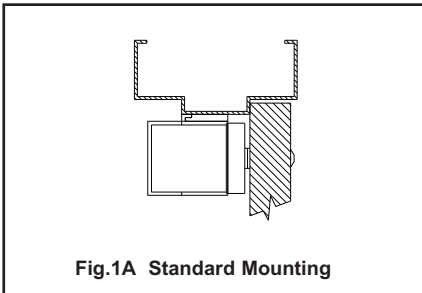


Fig.1A Standard Mounting

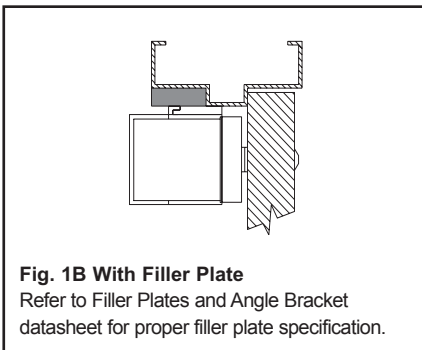


Fig. 1B With Filler Plate
Refer to Filler Plates and Angle Bracket datasheet for proper filler plate specification.

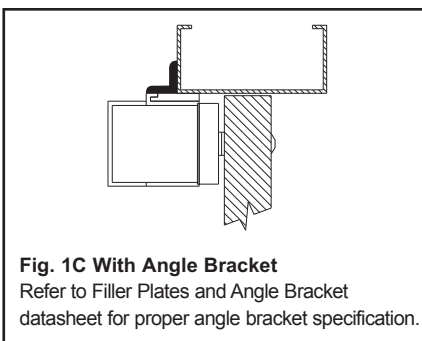


Fig. 1C With Angle Bracket
Refer to Filler Plates and Angle Bracket datasheet for proper angle bracket specification.

Code Compliance

► NFPA 101 ► IBC ► IFC

Standard Models

1511S NA K V Single, Adj 15/30, Aluminum
1511T NA K V Tandem, Adj 15/30, Aluminum

Operation

NA Operation

- 1) When the door is closed, latched, and the lock is energized, field selectable "15" or "30" is displayed, indicating the door is secure.
- 2) Applying pressure and retracting the door latch activates a warning tone and digital display countdown. If the door is released in 1 or 2 seconds, the warning tone stops and the door stays locked.

Non Latching Glass Doors: Activation by PSB560 Exit Sense Bar (see page 6)

- 3) When activation exceeds the nuisance time (1 or 2 seconds) an irreversible process begins that will unlock the door in 13 or 14 seconds. The voice message, tone and countdown annunciation continue.

MALE VOICE WITH SECURITY MESSAGE

Tone.... "Exit in twelve seconds,
Security has been alerted"
Tone.... "Exit in five seconds"
Tone.... "Exit now", Tone.... "Exit now"

FEMALE VOICE WITH SAFETY MESSAGE

Tone.... "Exit in twelve seconds,
Facility Staff has been alerted"
Tone.... "Exit in five seconds"
Tone.... "Exit now", Tone.... "Exit now"

STONE ONLY (In Lieu of Message)

Activation: Short beeps
Lock Release: Long beeps

- 4) The door unlocks when delay time has elapsed and the digital display indicates "00" and annunciation continues.

- 5) The lock is manually reset by built-in key (K) or optional wall mount keypad or keyswitch

- 6) The door will unlock upon signal from the fire life safety system or power loss.

Auto Power-Up: Lock will re-arm automatically when power is restored and fire alarm system is reset.

Manual Power Up: Lock is re-armed by manual means only at the door by key reset (K) or optional wall mounted reset keypad or keyswitch

Code Compliance

► California Building Code
► NFPA 101 ► IBC ► IFC

Standard Models

1511S ND K V Single, 15 Fixed, Aluminum
1511T ND K V Tandem, 15 Fixed, Aluminum

Operation

ND Operation

- 1) When the door is closed, latched, and the lock is energized, "15" is displayed indicating the door is secure.
- 2) Applying pressure and retracting the door latch activates a warning tone and digital display countdown. If the door is released in 1 second, the warning tone stops and the door stays locked.

Non-Latching Glass doors: Activation by PSB560 Exit Sense Bar

- 3) When activation exceeds the nuisance time of 1 second an irreversible process begins that will unlock the door in 14 seconds. The voice message, tone and countdown annunciation continue.

MALE VOICE WITH SECURITY MESSAGE

Tone.... "Exit in twelve seconds,
Security has been alerted"
Tone.... "Exit in five seconds"
Tone.... "Exit now", Tone.... "Exit now"

FEMALE VOICE WITH SAFETY MESSAGE

Tone.... "Exit in twelve seconds,
Facility Staff has been alerted"
Tone.... "Exit in five seconds"
Tone.... "Exit now", Tone.... "Exit now"

STONE ONLY (In Lieu of Message)

Activation: Short beeps
Lock Release: Long beeps

- 4) The door unlocks when 15 seconds has elapsed, the digital display indicates "00" and annunciation continues.

- 5) The lock is manually reset by the built-in key (K) or optional wall mounted keypad or keyswitch.

- 6) The door will unlock upon signal from the fire life safety system or power loss.

Auto Power-Up: Lock will re-arm automatically when power is restored and fire alarm system is reset

Manual Power-Up: Per California Building Code, lock is re-armed by manual means at the door by key reset (K) or optional wall mounted reset keypad or keyswitch

Code Compliance

- ▶ BOCA, National Building Code
- ▶ Chicago Building Code

Standard Models

- 1511S BD K V Single
- 1511T BD K V Tandem

Operation

BD Operation

1) When the door is closed, latched and the lock is energized, "15" is displayed indicating the door is secure.

2) Applying pressure and retracting the door latch activates a warning tone and digital display countdown. If the door is released in 1 second, the warning tone stops and the door stays locked.

Non-Latching Glass doors: Activation by PSB560 Exit Sense Bar

3) When activation exceeds 1 second, an irreversible process begins that will unlock the door in 14 seconds. The voice message, tone and countdown announcement continue.

MALE VOICE WITH SECURITY MESSAGE

Tone.... "Exit in twelve seconds,

Security has been alerted"

Tone.... "Exit in five seconds"

Tone.... "Exit now", Tone.... "Exit now"

FEMALE VOICE WITH SAFETY MESSAGE

Tone.... "Exit in twelve seconds,

Facility Staff has been alerted"

Tone.... "Exit in five seconds"

Tone.... "Exit now", Tone.... "Exit now"

TONE ONLY (In Lieu of Message)

Activation: Short beeps

Lock Release: Long beeps

4) The door unlocks when 15 seconds has elapsed, the digital display indicates "00" and announcement continues.

5) The door must be opened and then closed for 30 seconds before the lock automatically re-locks and announcement stops. Reopening of the door before the end of the 30 second re-locking cycle will restart the 30 second re-locking cycle. Manual reset not available.

6) Built-in key (K) or optional wall mounted keypad or keyswitch provide timed or maintained bypass.

7) The door will unlock upon signal from the fire life safety system or power loss.

Ordering Information

Model

- 1511S Single
- 1511T Tandem

Operation Mode

- NA NFPA 101, IBC and IFC Compliant
 - Field selectable:
 - 15 or 30 second exit delay
 - 1 or 2 second nuisance delay
 - Field selectable automatic or manual power-up after emergency release
- ND California Building Code (OSHPD*), NFPA 101, IBC & IFC Compliant
 - Fixed 15 second exit delay
 - Fixed 1 second nuisance delay
 - Field selectable automatic or manual power-up after power loss or emergency release.

* Office of Statewide Health Planning and Development. All California health and care facilities require inspection by OSHPD certified building inspectors
- BD ▶ BOCA, National Building Code
▶ Chicago Building Code
 - 15 second fixed exit delay
 - 1 second nuisance delay
 - Auto reset 30 seconds after door closure. Auto reset is retrigged if door opens before 30 seconds has elapsed.
 - 45 seconds when AHJ approved

Built In Reset and Control

- K Built in key switch. Provides 1-30 second timed bypass, sustained bypass and alarm reset (*standard*). Built in reset not available with BOCA and Chicago (BD) operation.
- P Built in reset push switch. Available with NFPA (NA) only.
- L Less key or push switch

Finish

Anodized Finishes

628 Aluminum (*standard*)

313 Dark Bronze

335 Black

Special Plated Finishes

605 Bright Brass


606 Dull Brass

625 Bright Chrome

626 Dull Chrome


Options

- E Energy Saver
1200 lbs holding force, low power consumption, only 275mA @ 24VDC.
- D Door Position Status
Provides remote monitoring of the door open or closed status and indicates the door has actually been opened for egress after alarm activation. (*Specify 2 for tandem*)
- B Magnetic Bond Alert Sensor
Indicates locked with full holding power or unlocked, reduced holding power, tampering or foreign material between the electromagnet and armature. (*Specify 2 for tandem*)
- A Anti-tamper Switch
Detects attempt to remove the access cover. (*Specify 2 for tandem*)
- VI One Language or Bilingual Spanish, or English and Spanish, verbal notification.
- VIC Custom Verbal Announcement
(10 piece purchase minimum) POA
- 101-SP External 15 Watt Speaker
Connects directly to 1511S or 1511T for enhanced decibels of onsite or remote voice message announcement. Speaker driver may be provided by others for extreme decibel requirements

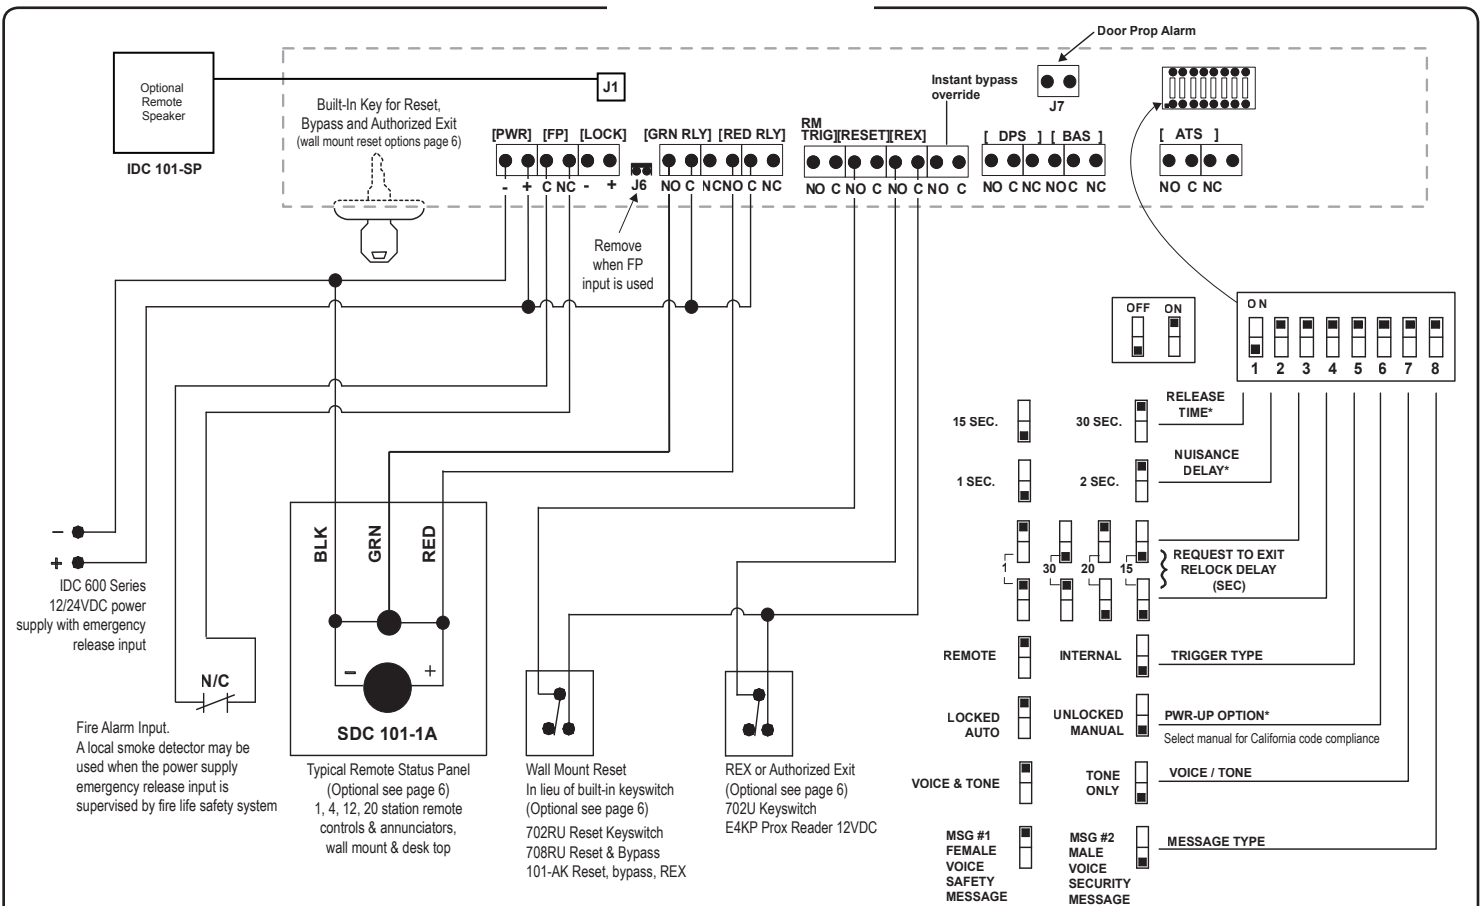


Infant and Pediatric Protection & Wandering Patient System Application

The Exit Check is unlocked when in maintained bypass or momentary bypass (access/REX) mode. When a tagged patient walks near or infant carried towards the door protection system sends a signal to the Exit Check®, locking the door immediately. Should a person then initiate unauthorized egress, the Exit Check® will provide voice and tone annunciation and delay egress for 15 or 30 seconds.

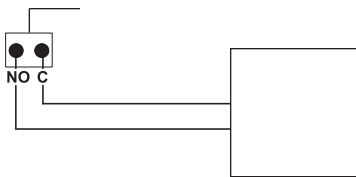


Keypad In Lieu of Built-In Keyswitch

Eliminates Problem of Lost Keys, Easy To Reach for Reset, Bypass And Authorized Exit. See 928 keypad page 6. Contact IDC for Wiring instructions



Egress Bar & Exit Device Trigger

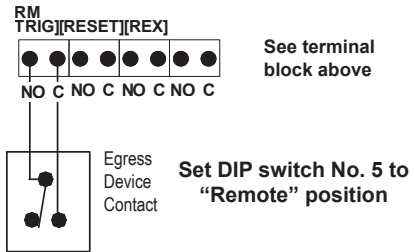

Terminal Board Connections								Monitoring Options				
POWER IN	FP	AUX LOCK OUTPUT	GRN RLY	RED RLY	REMOTE	RESET	REX	INSTANT BYPASS OVERRIDE	DPS	BAS	ATS	
- +	C NC	- +	NO C NC	NO C NC	NO C	NO C	NO C	NO C	NO C NC	NO C NC	NO C NC	
AUTO SENSING 12/24 VDC INPUT	TO CLOSED FIRE CONTACT (REMOVE J6 WHEN USED)	SLAVE / TANDEM LOCK CONTROL OUTPUT	LOCK SECURE OUTPUT	ALARM OUTPUT	EXTERNAL TRIGGER SWITCH INPUT	EXTERNAL RESET SWITCH INPUT	REQUEST TO EXIT INPUT	INSTANT LOCKING FEATURE	DOOR POSITION OUTPUT	MAGNETIC BOND ALERT OUTPUT	ANTI TAMPER OUTPUT	