
25-R Rim Device on ANSI A115.2 Prepared Door

Rim Panic Exit Device, Metal Door, LHR Shown, RHR Opposite

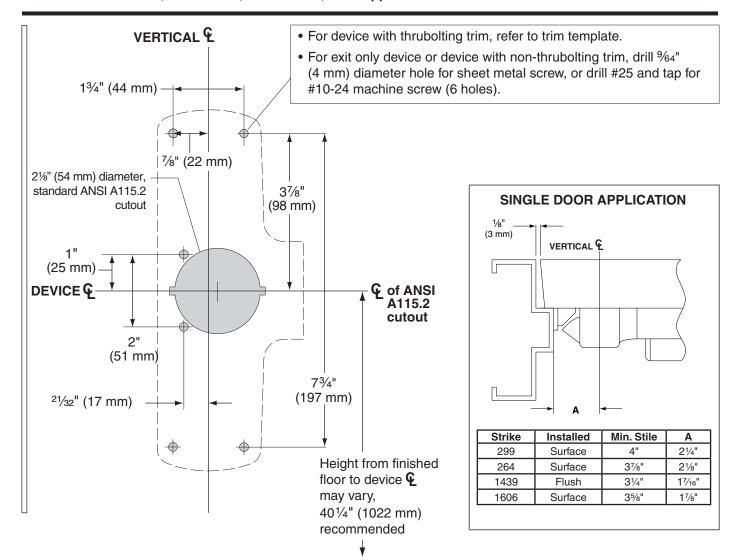

Strike	Installed With	Min. Stile	В	1½ (6 m		
299	2923 Mullion	41/8"	3"			
264	2923 Mullion	4"	27/8"		/1\	
1439	2923 Mullion	37/8"	2¾"		/ \	
1439	4023 Mullion	41/8"	3"			4 7
1606	2923 Mullion	41/4"	25/8"			
1606	4023 Mullion	41/2"	27/8"		+ $($	
1609	Surface 25-V	4"	2%"			

- On ANSI 115.2 door, vertical center line of device should be moved up or down to match vertical center line of ANSI 21%" cutout
- ANSI A115.2 door cannot be used with NL-OP applications
- For sexbolt preparation, refer to Template T-4014.
- For outside trim, see trim template for door preparation.
- See Master Sheet #0100 for suggested reinforcing.

TEMPLATE

T-1260-a