

## (F)25-R Rim Device

Rim Panic and Fire Exit Device, Metal Door, LHR Shown, RHR Opposite

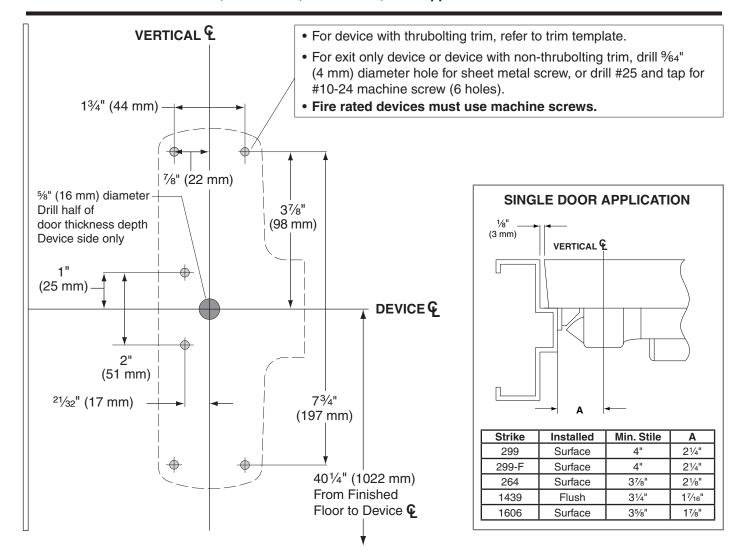

Strike	Installed With	Min. Stile	В
299	2923 Mullion	41/8"	3"
299	4023 Mullion	43/8"	31/4"
299-F	F-4023 Mullion	43/8"	31/4"
499-F	F-4023 Mullion	41/2"	35/16"
264	2923 Mullion	4"	21/8"
264	4023 Mullion	41/4"	31/8"
1439	2923 Mullion	37⁄8"	2¾"
1439	4023 Mullion	41/8"	3"
1606	2923 Mullion	41/4"	25/8"
1606	4023 Mullion	41/2"	27/8"
1609	Surface 25-V	4"	23/8"



- For sexbolt preparation, refer to Template T-4014.
- For outside trim, see trim template for door preparation.
- See Master Sheet #0100 for suggested reinforcing.
- For 25-R device on ANSI A115.2 door, refer to Template T-1260.
- For NL-OP cylinder preparation, see template T-4030.

**TEMPLATE** 

T-1201-c