


# Electrified Hardware Component Selection

## 1 Locking Devices

- Electric Strike
- Delayed Egress
- Electrified Lockset
- Electrified Exit Device
- Frame Actuator Lockset
- Magnetic Lock

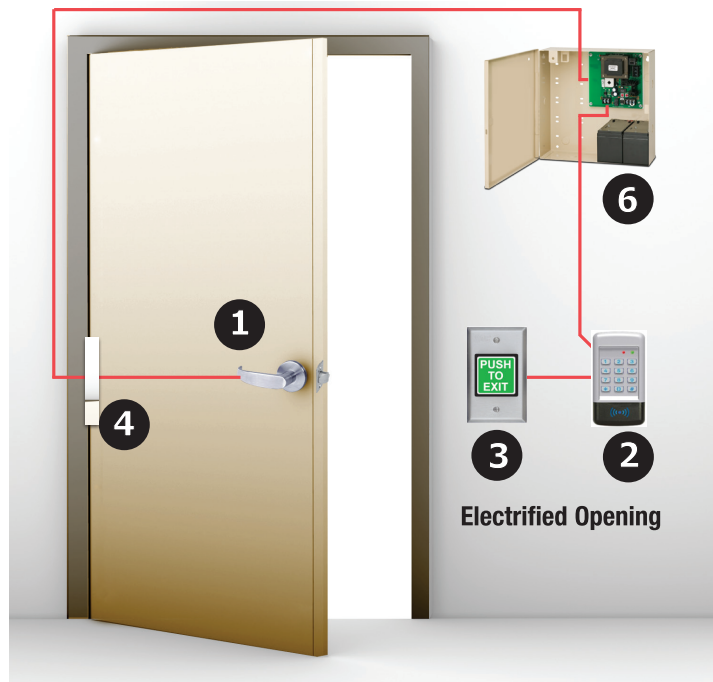

## 2 Access Controls

- Standalone or Network
- Keyswitch
  - Digital Keypad
  - Card Reader




## 3 Egress Devices

- Exit Switch
- PIR Egress Sensor
- Exit Sense Bar
- Emergency Door Release



## 4 Electric Power Transfer Devices

- Required With Locksets & Exit Devices
- Electric Through Wire (ETW) Hinge
  - Power Transfer Loop
  - Electric Power Transfer (EPT)
  - Electrified Roton



## 5 Door Position Sensors



## 6 Power Supply & Door Controllers

- 2901**  
Power Supply
- Designed to operate exit devices equipped with electric latch retraction (ELR) with solenoid

- 2902**  
Power Supply
- Designed to operate exit devices equipped with electric latch retraction with day/night mode feature (ELR) with solenoid

- 2903**  
Power Supply
- Provides power for Fail Safe or Fail Secure locking devices
  - 24 VDC output; 2 AMP capacity;
  - Filtered/regulated

- 2904**  
Power Supply
- Provides power and control for openings with an electrified locking device and automatic door operator
  - 24 VDC output; 2 AMP capacity
  - Filtered/regulated

- 2908**  
Power Supply
- Modular
  - Provides power for Fail Safe or Fail Secure locking devices
  - 12/24 VDC output; 1 AMP capacity
  - Filtered/regulated

- 2909**  
Power Supply
- Modular
  - Provides power for Fail Safe or Fail Secure locking devices
  - 12/24 VDC output; 2 AMP capacity
  - Filtered/regulated