



ALUMINUM • HOLLOW METAL • WOODEN FRAME APPLICATIONS

# IDC-10STRIKE CU

UNIVERSAL CYLINDRICAL STRIKE



## FEATURES

- IDC-10STRIKE CU
- UL/ULC listed for up to 1500 lbs of static strength
- Conventional keeper design promotes even-load distribution in the event of a forced entry
- Reinforced housing reduces twisting on imperfect frames
- Brushed, US32D, stainless steel provides a complementary finish to existing door hardware.


## VERSATILE & MODULAR DESIGN

The Universal cylindrical strike provides controlled access and security for egress and ingress applications where code compliance and safety are paramount. This strike has been independently tested for 1 million + cycles of operation.



## COMPONENTS


- 1 Electric Strike Body, ×1
- 2 Mounting Bracket, ×2
- 3 Frame Adapter, ×1
- 4 Mounting Shims, ×8
- 5 Modular Plug-in Wire Connectors, ×2
- 6 Wood Faceplate, ×1
- 7 Hollow Metal Faceplate, ×1
- 8 Aluminum Faceplate, ×1

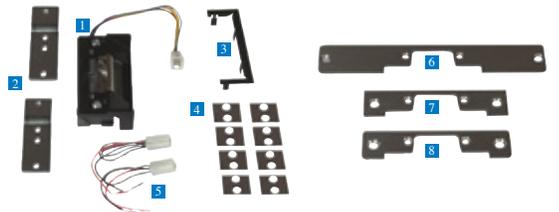

## DOOR COMPATIBILITY

DOOR LOCK TYPE			
Narrowline Aluminum	Cylindrical	Mortise	Rim Exit Device

DOOR FRAME TYPE		
Narrowline Aluminum	Hollow Metal	Wood


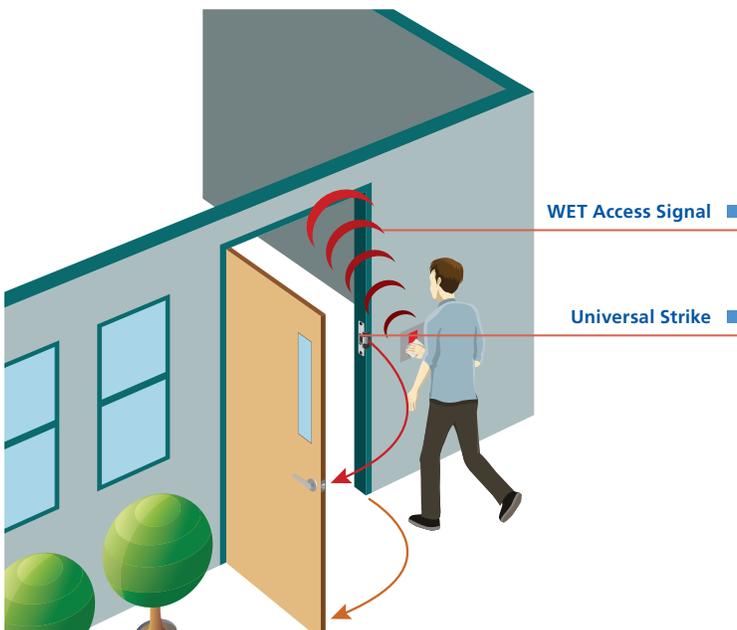


**International Door Closers, Inc.**

COPYRIGHT 2018 INTERNATIONAL DOOR CLOSERS, INC

**West: 800-544-4422 • East: 800-225-6737**

**www.intldoorclosers.com**

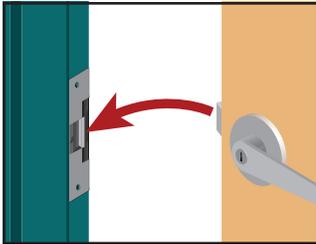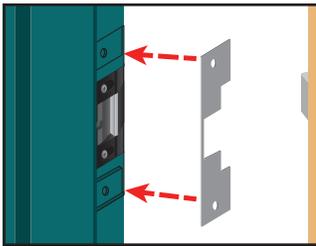

FLUSH MOUNTED WITH THE DOOR FRAME



RIM EXIT ELECTRIC STRIKE



UL LISTED MAGLOCKS



ACCESS CONTROL



REX DETECTOR


APPLICATIONS

## APPLICATIONS

- Healthcare / Assisted Living
- Transportation
- Retail
- Education
- Government
- Multi-Family Housing
- Hospitality
- Institutional

STRIKE FAMILY

## STRIKE DIMENSIONS


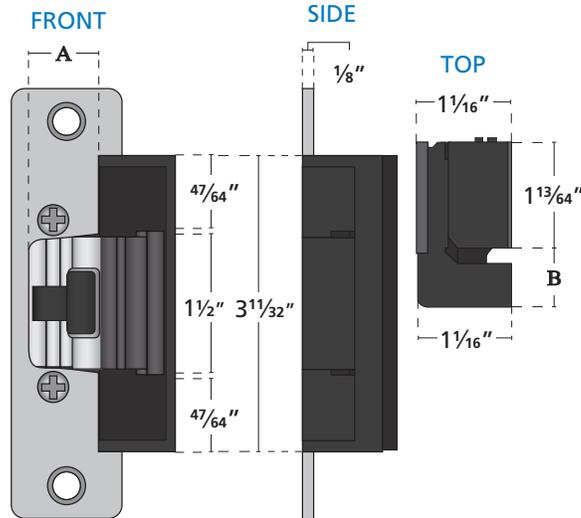


### HORIZONTAL ADJUSTMENT

A	Default	Min	Max
Inches	13/16"	45/64"	31/32"
Millimeters	20.64 mm	17.86 mm	24.61 mm
B	Default	Min	Max
Inches	21/32"	1/2"	49/64"
Millimeters	16.67 mm	12.7 mm	19.45 mm

RELATED PRODUCTS

## PLATE DIMENSIONS

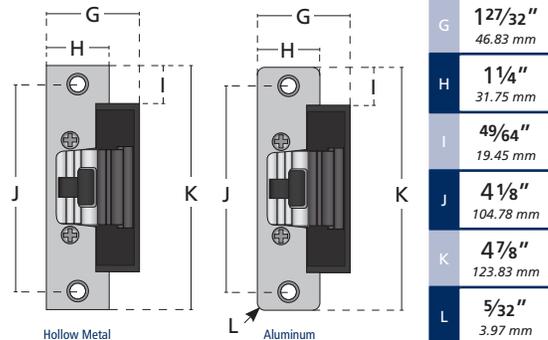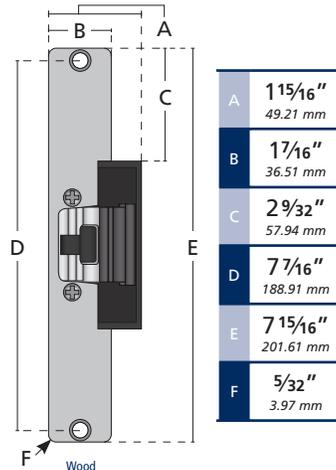

## TECHNICAL SPECIFICATIONS

MODE	VOLTAGE	DUTY	SOUND	AMPS†	OHMS‡
Fail Safe Fail Secure	12 VDC	Continuous	Silent	0.375	37
Fail Safe Fail Secure	24 VDC	Continuous	Silent	0.190	148
Fail Safe Fail Secure	12 – 24 VAC	Intermittent	Buzz	0.280 – 0.565	37

**Intermittent Duty** – Energized less than 1 minute with duty ratio 1:5

**Continuous Duty** – Energized 1 minute or more

† Amp ratings are based on maximum current draw at +50°F and include initial power-up current

‡ Nominal resistance at +77°F ±7% tolerance

Specifications are subject to change without prior notice.