




**Flexibility for  
More Safety and  
More Reliability**

# ACTIVE INFRARED DOOR SENSOR OA-FLEX T FOR SLIDE AND SWING DOORS



**Adapted in Cold District**  
-31°F to 131°F

BLACK

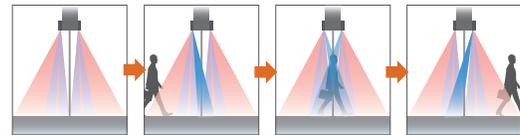


Whole presence detection capability OA-FLEX T can use detection area as presence detection area and possible to utilize for various applications.

## MONITORING CAPABILITY

OA-FLEX T has built-in "monitoring capability". The OA-FLEX T monitors all its critical functions and notices compatible controls when an error occurs. Self monitoring capability ensures a higher level of performance over the life of the sensor.

## BLUE ZONE

How it Works: When the approach area detects a person or object, the sensor will activate the door and turn on the "BLUEZONE" which detects through the threshold. As long as someone is in the detection area, the sensor will keep the door in the open position. Once the area is cleared, the "BLUEZONE" will ignore the door panels and allow the door to safely close.

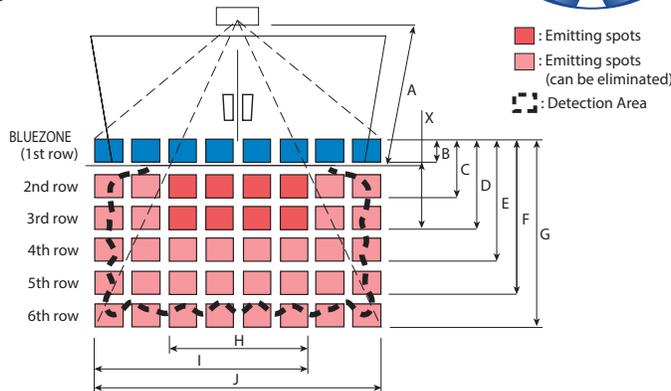

Emitting area [ m (feet,inch) ]

	2.00 (6'7")	2.30 (7'7")	2.50 (8'2")	3.00 (9'10")
A				
B	0.13 (5")	0.16 (6")	0.17 (7")	0.21 (8")
C	0.38 (1'3")	0.46 (1'6")	0.50 (1'8")	0.60 (1'12")
D	0.71 (2'4")	0.86 (2'10")	0.94 (3'1")	1.13 (3'8")
E	0.84 (2'9")	1.01 (3'4")	1.09 (3'7")	1.31 (4'4")
F	1.34 (4'5")	1.62 (5'4")	1.76 (5'9")	2.11 (6'11")
G	1.75 (5'9")	2.11 (6'11")	2.29 (7'6")	2.75 (9')
H	0.92 (3')	1.11 (3'8")	1.20 (3'11")	1.45 (4'9")
I	1.49 (4'11")	1.80 (5'11")	1.95 (6'5")	2.34 (7'8")
J	2.06 (6'9")	2.48 (8'2")	2.69 (8'10")	3.23 (10'7")


Charts show the values in the following area angle adjustment settings ; Depth : 0° Width : 0°

## SPECIFICATIONS

Model	OA-FLEX T
Cover color	Black
Mounting height	2.0 m (6'7") to 2.5 m (8'2")
Detection area	See DETECTION AREA
Detection method	Active infrared reflection(*1)
Area angle adjustment	Depth : -8° to +8° Width : ±7° (2 clicks with 3.5° every click-Left/Right)
Power supply (*2)	12 to 24 VAC ±10% (50 / 60 Hz) 12 to 30 VDC ±10%
Power consumption	< 2.0 W (< 5 VA at AC)
Operation indicator	See Operation indicator table
Operating humidity	< 80%

Test input	Opto coupler Voltage / 5 to 30 VDC Current / 6 mA Max. (30 VDC)
Activation output	Form A relay 50 V 0.3 A Max. (Resistance load)
Safety output	Form A relay 50 V 0.3 A Max. (Resistance load)
Operating temperature	-35 to +55°C (-31 to 131°F)
Noise level	< 70 dBA
Output hold time	Approx. 0.5 sec.
Response time	< 0.3 sec.
IP rate	IP54
Weight	220 g (7.8 oz)

Accessories	1 Operation manual 2 Mounting screws 1 Mounting template 1 Area adjustment tool 1 Cable 3 m(9'10") (8 x 0.22 mm AWG24) (*3)
<ol style="list-style-type: none"> <li>BLUEZONE (1st row), 2nd and 3rd rows have a presence detection function.</li> <li>When using this sensor, the sensor has to be connected to a door system which has the SELV circuit.</li> <li>Overcurrent protection with less than 2A.</li> </ol>	

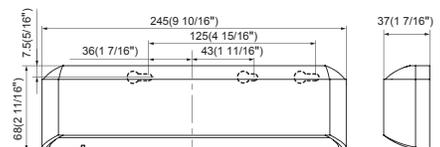

**International Door Closers, Inc.**

COPYRIGHT 2018 INTERNATIONAL DOOR CLOSERS, INC

**West: 800-544-4422 • East: 800-225-6737**

**www.intldoorclosers.com**