



INSTRUCTIONS FOR INSTALLING THE

SARGENT & GREENE 4253 SWITCH LOCK K.S.S. NOT UL LISTED
4253 SWITCH LOCK K.S.S. NOT UL LISTED

PREPARATION OF WALL, DOOR OR PANEL




DIMENSIONS & OPERATION OF SWITCH LOCK




TO OPERATE: TURN KEY 90° TO THE RIGHT OR 90° TO THE LEFT (UNTIL STOP IS REACHED) - THEN RETURN KEY TO THE VERTICAL POSITION AND REMOVE.

MICROSWITCH MAY BE REMOVED FOR WIRING HOOKUP, IF DESIRED.



ASSEMBLY

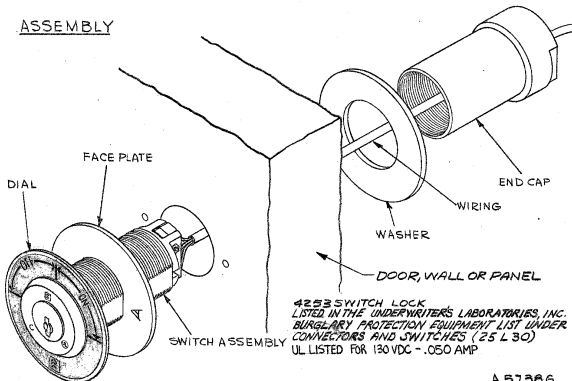

4253 SWITCH LOCK
LISTED IN THE UNDERWRITERS LABORATORIES, INC.
BURGLARY PROTECTION EQUIPMENT LIST UNDER
CONNECTORS AND SWITCHES (25 L 30)
UL LISTED FOR 130 VDC - .050 AMP