

LOCKING LADDER PULL - FULL HEIGHT PULL ORDER FORM

ORDER DATE:
 CUSTOMER NAME:
 CUSTOMER P.O. #:
 FINISH:
 QUANTITY:
 CUSTOMER SIGNATURE:

ALLFH-BD (BOLT DOWN) ALLFH-BU (BOLT UP) ALLFH-BD/BU (BOLT DOWN/UP)

FINISH: US32D US32 US3 US4 US10 US10B

CUSTOM POWDER COAT:

TOP MOUNTING POST CTC (LOCK POST) A:
 TOP MOUNTING POST CTC (LOCK POST) B:
 OVERALL PULL LENGTH:




DOOR TYPE: GLASS METAL WOOD
 DOOR THICKNESS:
 POST END TO MOUNTING POST CENTER: (TYPICALLY 6")

ENGRAVING TYPE: PUSH PULL

THUMBTURN TYPE: STANDARD ADA

CYLINDER TYPE:

- ABLC – Less Cylinder (Standard)
- ABRC – ABH Supplied Best Rim Cylinder Housing Only for SFIC Core
- ABSC – ABH Supplied Best Rim Cylinder with SFIC Construction Core

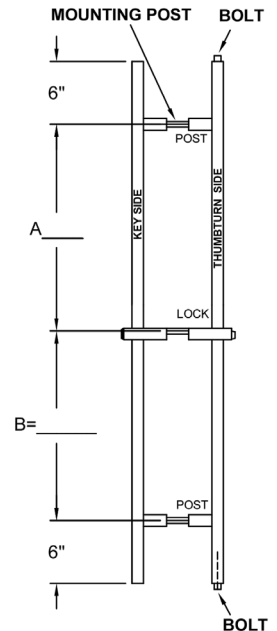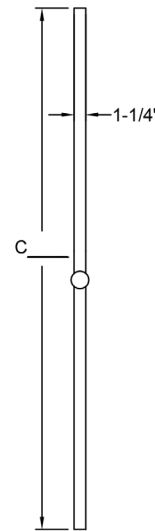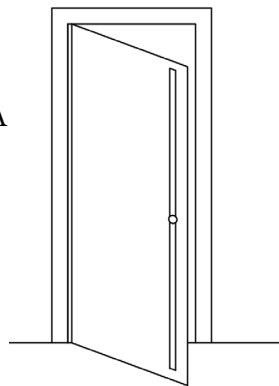

NOTE: CYLINDER MUST BE LOCATED 34"-48" ABOVE FINISHED FLOOR TO MEET ADA REQUIREMENTS. CALIFORNIA ADA REQUIRES CYLINDER TO BE LOCATED 36"-46" ABOVE FINISHED FLOOR.



www.abhmfg.com
 Architectural Builders Hardware Mfg., Inc.
 1222 Ardmore Ave., Itasca, IL 60143
 630-875-9900 • FAX 800-9FAXABH (932-9224)

- Download File from Website
- Fill out form
- SUBMIT