

# LOCKING LADDER PULL - HALF HEIGHT PULL ORDER FORM

ORDER DATE:  
 CUSTOMER NAME:  
 CUSTOMER P.O. #:  
 FINISH:  
 QUANTITY:  
 CUSTOMER SIGNATURE:

DBU (HALF HIGHT BOLT UP)      DBD (HALF HEIGHT BOLT DOWN)

FINISH:      US32D      US32      US3      US4      US10      US10B

CUSTOM POWDER COAT:

TOP MOUNTING POST CTC (LOCK POST) A:  
 TOP MOUNTING POST CTC (LOCK POST) B:  
 OVERALL PULL LENGTH:

DOOR TYPE:      GLASS      METAL      WOOD

DOOR THICKNESS:

POST END TO MOUNTING POST CENTER: (TYPICALLY 6")


LOCK END TO MOUNTING POST CENTER: (TYPICALLY 2-3/4")

ENGRAVING TYPE:      PUSH      PULL

THUMBTURN TYPE:      STANDARD      ADA

CYLINDER TYPE:

- ABLC – Less Cylinder (Standard)
- ABRC – ABH Supplied Best Rim Cylinder Housing Only for SFIC Core
- ABSC – ABH Supplied Best Rim Cylinder with SFIC Construction Core

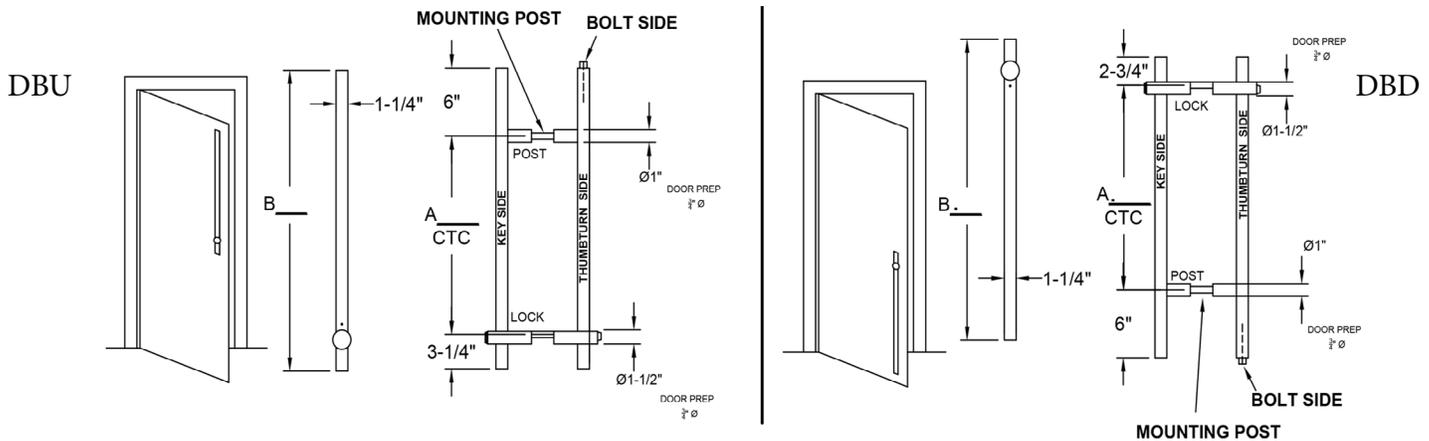

**NOTE: CYLINDER MUST BE LOCATED 34"-48" ABOVE FINISHED FLOOR TO MEET ADA REQUIREMENTS. CALIFORNIA ADA REQUIRES CYLINDER TO BE LOCATED 36"-46" ABOVE FINISHED FLOOR.**



[www.abhmf.com](http://www.abhmf.com)

Architectural Builders Hardware Mfg., Inc.  
 1222 Ardmore Ave., Itasca, IL 60143  
 630-875-9900 • FAX 800-9FAXABH (932-9224)

- Download File from Website
- Fill out form
- SUBMIT