


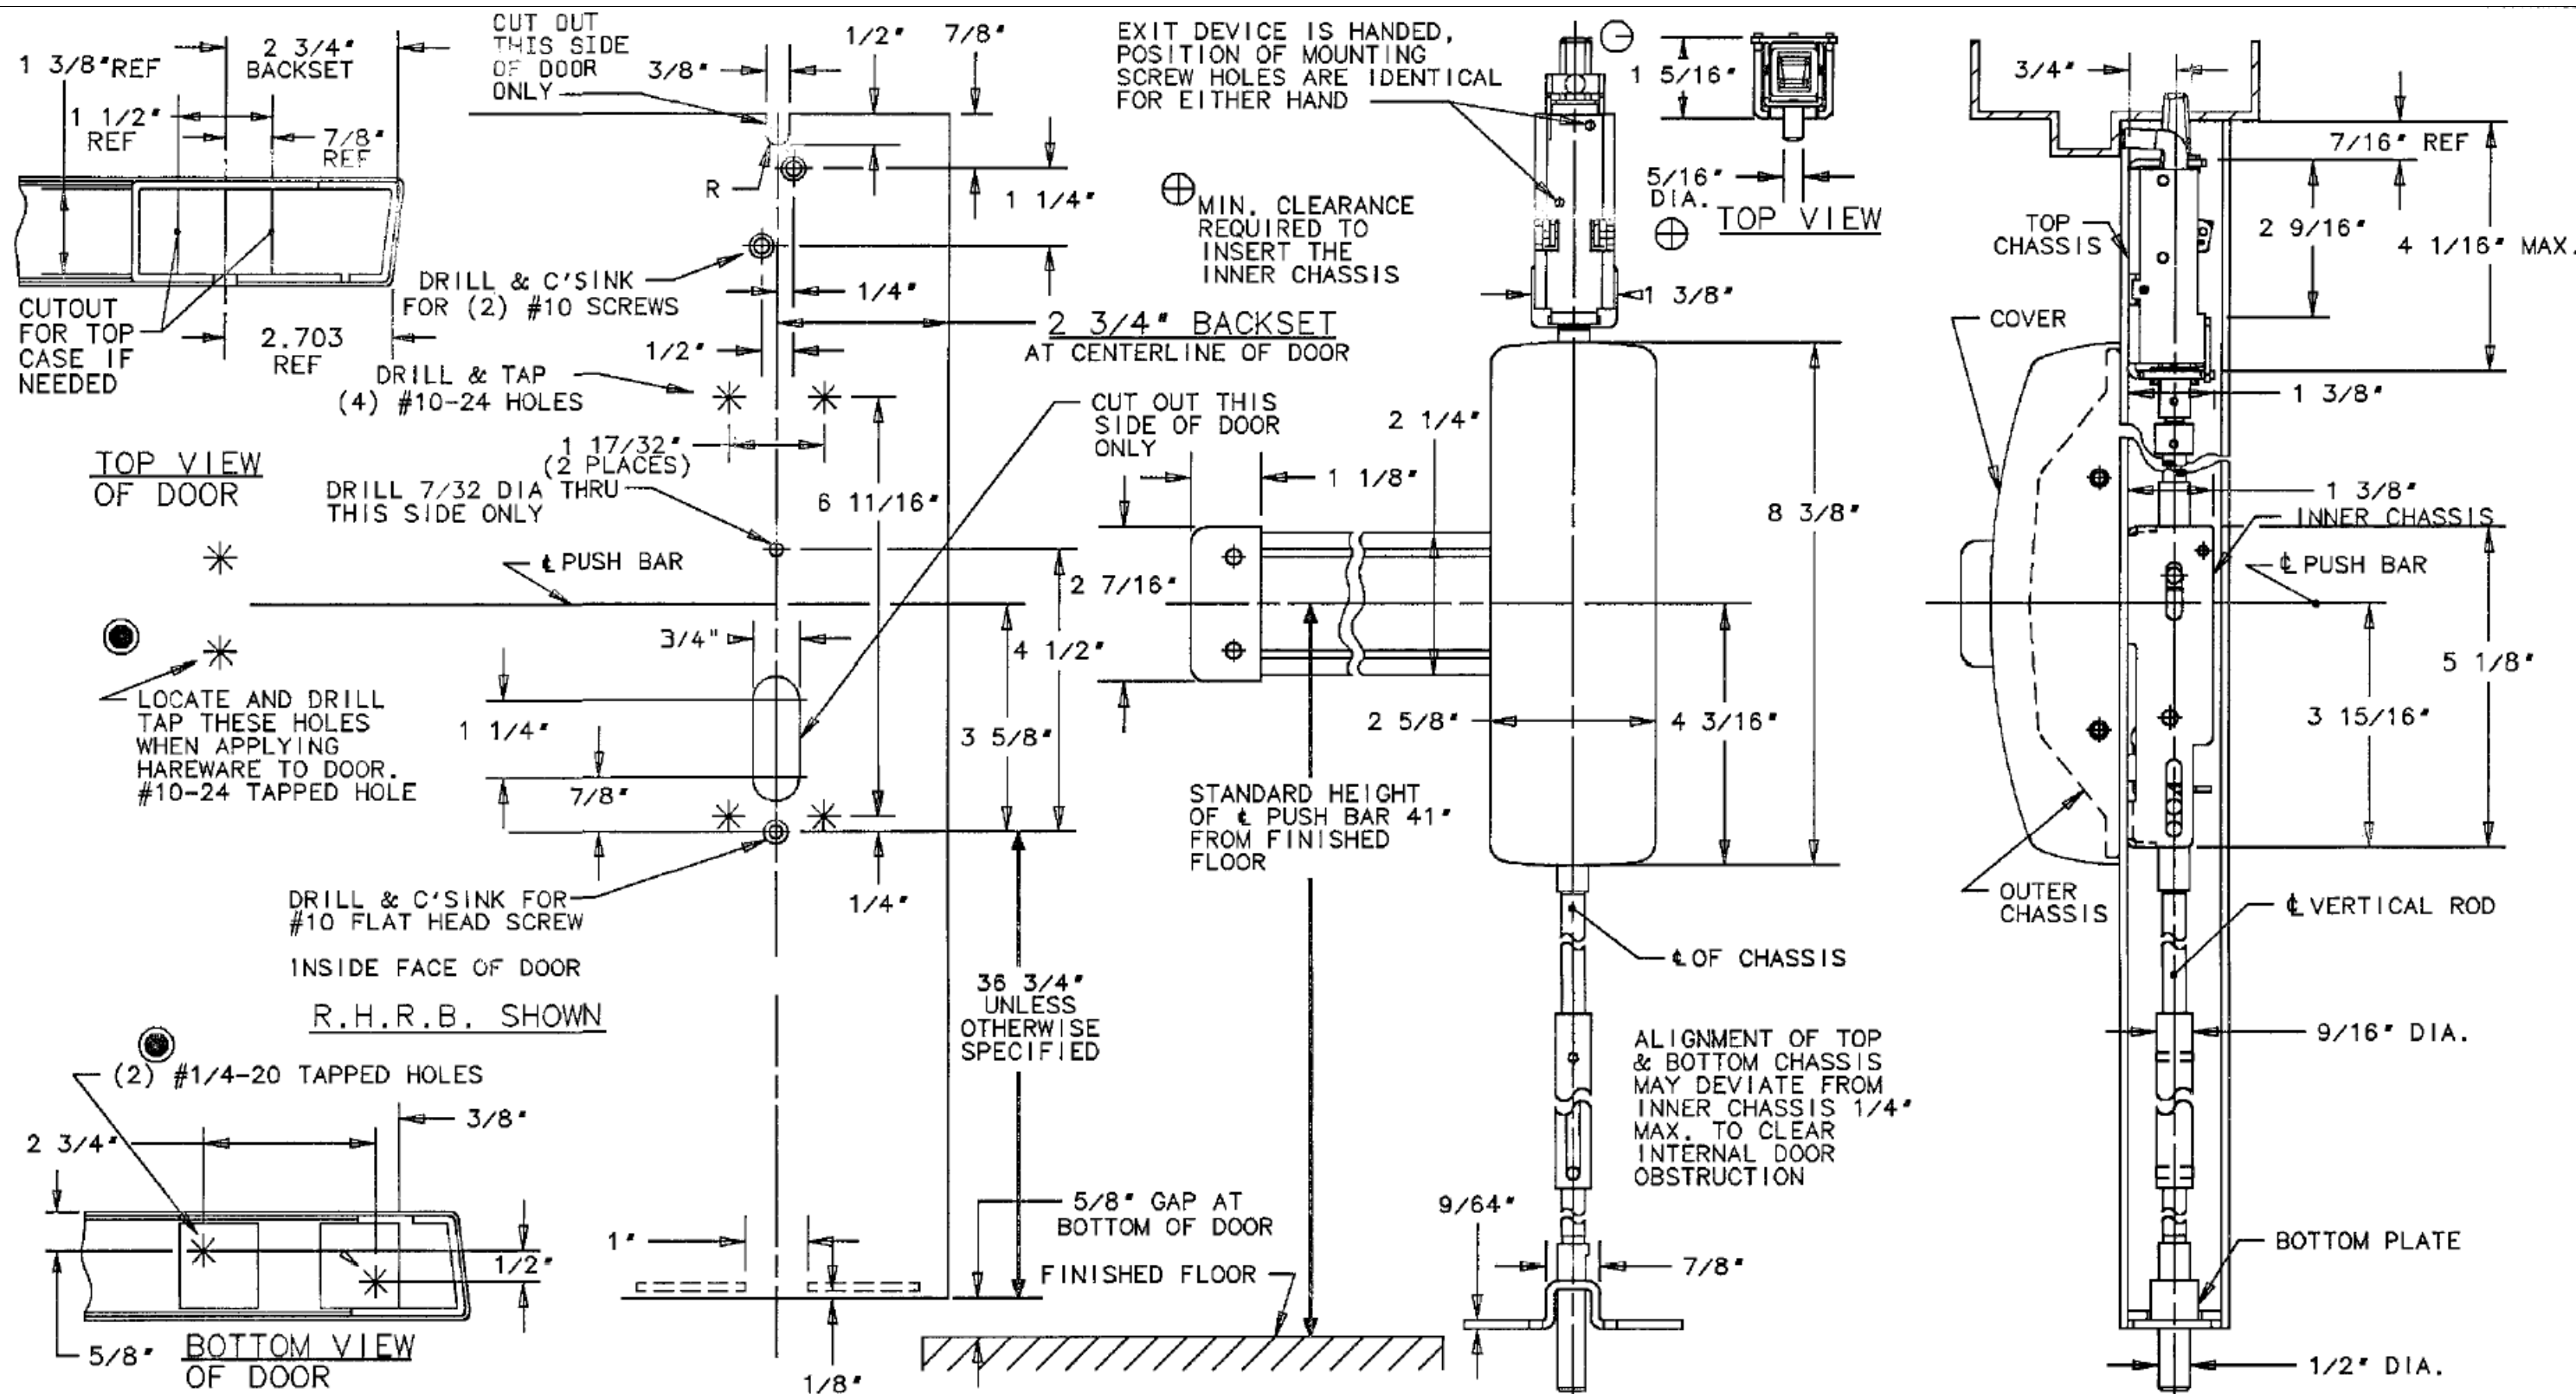

NOTES:

- DOOR PREPARATION SHOWN IS FOR INSIDE OF DOOR ONLY.
- IF OUTSIDE PULL AND/OR OUTSIDE CONTROL IS USED, SEE APPROPRIATE METAL DOOR TEMPLATE FOR OUTSIDE DOOR PREP.
- REINFORCE HOLLOW METAL DOORS FOR TOP BOTTOM AND INNER CHASSIS WHERE HARDWARE IS TO BE ATTACHED.
- SURFACE OF DOOR WHERE EXIT DEVICE IS TO BE APPLIED, MUST BE FLUSH.
- WE RECOMMEND THAT ALL TAPPED HOLES BE DRILLED AND TAPPED IN FIELD
- TOLERANCE ON ALL FRACTIONAL DIMENSIONS $\pm 1/64"$
- SEE TEMPLATE NO. 4569 ELECTROLYNX DETAILS WHEN NEEDED
- SEE STRIKE TEMPLATE NO. 4449 FOR TOP STRIKE

SARGENT® Manufacturing Company
100 Sargent Drive New Haven, CT 06511

TEMPLATE: MD8600 PANIC
& 12-MD8600 FIRE
CONCEALED VERTICAL ROD EXIT
DEVICE FOR METAL DOORS
(INSIDE TRIM ONLY)

RELEASE DATE
8 JAN 15
TEMPLATE NO.
4445 J