


**Notes:**

1. Backset is measured from centerline of bevel which is centerpoint of door thickness.
2. (\*) When preparing doors for lead wrapped locks, add 1/8 (3.2) to dimensions marked (\*) to allow proper clearance.
3. 1-1/8 (28.6) strike lip suits frame for 1-3/4 (44.5) thick door, lip will vary for other door thicknesses.
4. For open back strike, refer to template T30606.
5. Dimensions given in inches and (mm).


| Function                   | Required Holes |   |   |   |
|----------------------------|----------------|---|---|---|
|                            | A              | B | C | D |
| ML2002                     | X              | X |   |   |
| ML2003                     | X              |   |   |   |
| ML2020                     |                |   | X | X |
| ML2022                     | X              | X |   |   |
| ML2024                     | X              |   | X |   |
| ML2029                     | X              |   | X |   |
| ML2030                     |                |   | X | X |
| ML2040                     |                |   | X | X |
| ML2048                     | X              | X |   |   |
| ML2049                     | X              | X |   |   |
| ML2059                     | X              |   |   |   |
| ML2060                     |                |   | X | X |
| ML2062                     | X              | X |   |   |
| ML2065                     | X              | X | X |   |
| ML2067                     | X              | X | X |   |
| ML2068                     | X              | X | X |   |
| ML2069                     | X              | X | X |   |
| ML2072                     | X              | X |   |   |
| ML2073                     | X              |   |   |   |
| ML2075                     | X              | X |   |   |
| ML2082                     | X              | X |   |   |
| ML2092                     | X              | X |   |   |
| ML20608                    | X              |   | X |   |
| ML20609                    |                |   | X |   |
| Vx0 (Indicator Outside)    |                |   |   | X |
| V0x (Indicator Inside)     |                |   | X |   |
| Vxx (Indicator Both Sides) |                |   | X | X |

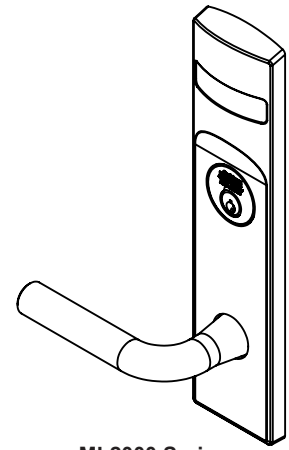

**ML2000 Series  
VN Escutcheon Trim Indicator**

**CAUTION: DOOR & FRAME MANUFACTURERS**  
When door gasketing or silencers are used, proper allowances must be made for strike location to maintain a common centerline with lock and door as shown so that bolt will freely enter strike.

"x" Denotes indicator window option code

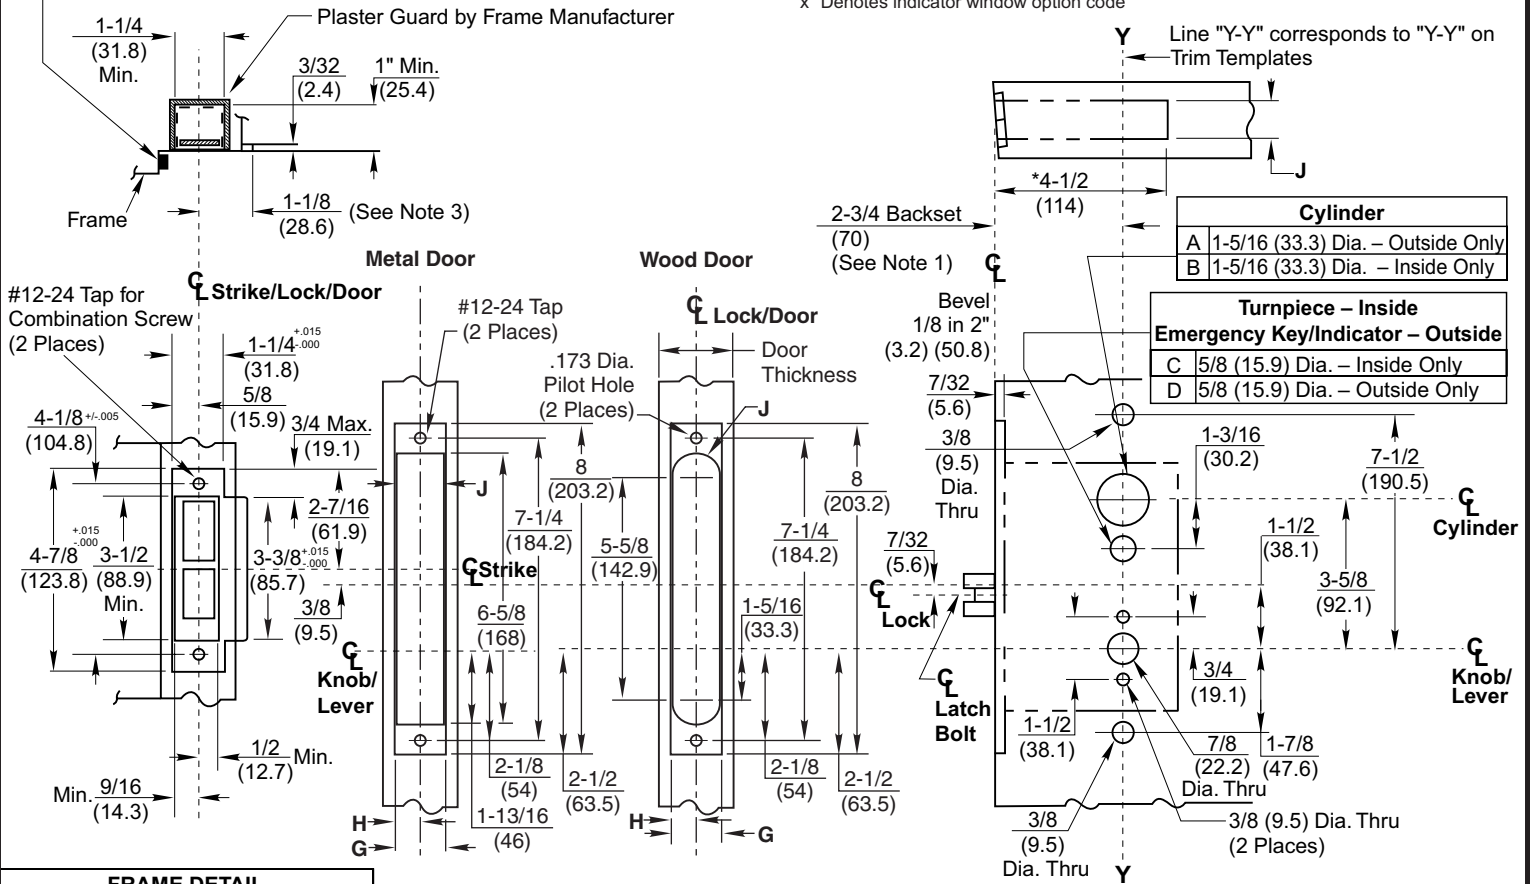

| FRAME DETAIL            |                         |
|-------------------------|-------------------------|
| ANSI Strike             | Description             |
| 236L72                  | Latch & Dead Bolt Holes |
| 236L73                  | Latch Bolt Hole Only    |
| 236L74                  | Dead Bolt Hole Only     |
| And Optional Box 120F76 |                         |

| G            | H            | J             | Door Thickness             |
|--------------|--------------|---------------|----------------------------|
| 1-1/4 (31.8) | 5/8 (15.9)   | 1-1/16 (27)   | 1-3/4 Min. (44.5) Standard |
| 1-1/16 (27)  | 17/32 (13.5) | 1-1/32 (26.2) | 1-3/8 Min. (34.9) Optional |

| Tolerances |        |
|------------|--------|
| Inches     | (mm)   |
| .005       | (.127) |
| .015       | (.381) |

**RESPONSIBILITY**  
DOOR AND FRAME MANUFACTURERS ARE RESPONSIBLE FOR PROVIDING ADEQUATE CONSTRUCTION OR REINFORCEMENTS FOR PROPER INSTALLATION OF HARDWARE SHOWN. ALL ARCHITECTURAL BUILDERS HARDWARE MUST BE INSTALLED ON PROPERLY REINFORCED DOORS AND FRAMES, REGARDLESS OF TYPE, MATERIAL, OR METHOD OF CONSTRUCTION.

**ML2000 Series  
Mortise Lock  
with Visual Indicator  
Used with VN Escutcheon Trim**



www.corbinrusswin.com

|                 |                 |                      |
|-----------------|-----------------|----------------------|
| SUPERSEDES      | T31250-2        | DO NOT SCALE DRAWING |
| TEMPLATE NUMBER | <b>T31250-3</b> | DATE <b>10-21</b>    |

Experience a safer and more open world

Copyright © 2019, 2021, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved.

Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.