Architectural Door Accessories



The global leader in door opening solutions

Markar Full Surface Reinforcing Pivots

A practical way to ensure longer door life

This full-surface reinforcing pivot adds years of life to openings where the hinges or hinge reinforcements have failed. An economical way to solve door sag problems, reinforcing pivots take the load off the top hinge and transfer it to screws that will not pull out.



Applications:

- Schools
- Healthcare
- Public Buildings

Technical Specifications

Hinge Type:

Full Surface Reinforcing Pivots for Flush Doors

Material:

Heavy Duty 3/16" (.187) Cold-Rolled Steel

Finishes:

Zinc Plated (US2G)

Mounting Hardware:

8 ea. $\frac{4}{20}$ x $\frac{3}{4}$ " Phillips flat head machine screws 8 ea. $\frac{4}{14}$ x $\frac{1}{4}$ " Phillips flat head sheet metal screws 2 ea. $\frac{4}{20}$ x $\frac{1}{4}$ " Sleeve bolts

Capacity:

Supports Weights up to 300 lbs.


Hole Pattern:

Symmetrically

Handing:

Non-handed

B1921	The B1921 pivot is designed with a ½" offset to match the pivot point of a 4" wide butt hinge.
B1923	The B1923 pivot is designed with a 3/4" offset to match the pivot point of a 41/2" wide butt hinge.

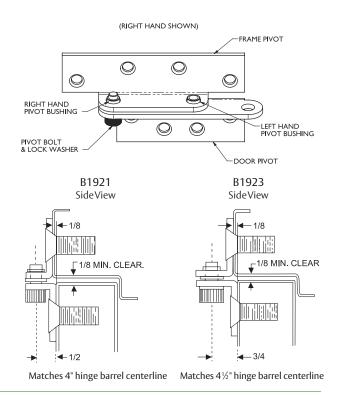

ASSA ABLOY 5535 Distribution Drive Memphis, TN 38141 websales@pemko.com • www.pemko.com

MEMPHIS, TN USA P: 800 824-3018 F: 800 243-3656 VENTURA, CA USA P: 800 283-9988 F: 800 283-4050 VANCOUVER, BC CA P: 877 535-7888 F: 877 535-7444

TORONTO, ON CA P: 877 535-7888 F: 877 535-7444