
Architectural Door Accessories

DO NOT SCALE

ASSA ABLOY

McKinney DLS-8* Template Double Lipped Strike For Edge Hung Doors

The global leader in door opening solutions

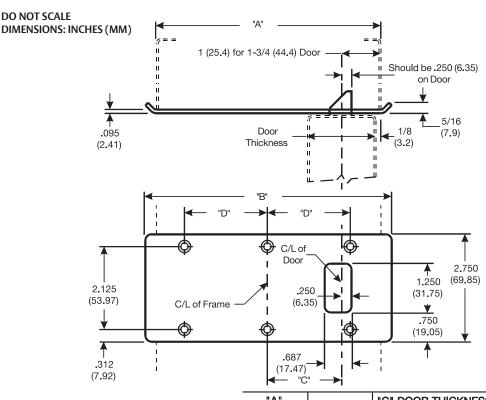

"A" FRAME SIZE	"B" (REF.)	"C" DOOR THICKNESS		
		1-3/8 (34.9)	1-3/4 (44.4)	"D"
4-3/4	5-5/16	1.562	1.375	1.375
(120 . 6)	(134 . 9)	(39.66)	(34.92)	(34.92)
5-5/8	6-3/16	2.000	1.812	1.750
(142.9)	(157.2)	(50.80)	(46.04)	(44.45)
5-3/4	6-5/16	2.062	1.875	1.875
(146.0)	(160 . 3)	(52.33)	(47.62)	(47.62)
5-7/8	6-7/16	2.125	1.937	1.875
(149 . 2)	(163 . 5)	(53.97)	(49.17)	(47.62)
6-1/4	6-13/16	2.312	2.125	2.125
(158.7)	(173 . 0)	(58.68)	(53.97)	(53.97)
6-3/4	7-5/16	2.562	2.375	2.375
(171.4)	(185.7)	(65.04)	(60.32)	(60.32)
7-1/8	7-11/16	2.750	2.562	2.500
(180.9)	(195 . 3)	(69.80)	(65.02)	(63.50)
7-3/4	8-5/16	3.062	2.875	2.875
(196.8)	(211.1)	(77.73)	(73.02)	(73.02)
8-1/4	8-13/16	3.312	3.125	3.125
(209.5)	(223.8)	(84.07)	(79.37)	(79.37)
8-3/4	9-5/16	3.562	3.375	3.375
(222.2)	(236.5)	(90.42)	(85.72)	(85.72)

Template 222A-15

Effective date: September 8, 2015

Supercedes: All Previous

McKINNEY Template Double Lipped Strike for edge hung doors are made to conform to this drawing.

Machine Screw Size: 1/2 x 8-32 F.H.

Wood Screw Size: 3/4 x 8 F.H.

*McKINNEY DLS-8 is designed for use with cylindrical bored lock sets and may not work properly with some mortise locks. Consult factory for mortise lock applications.