


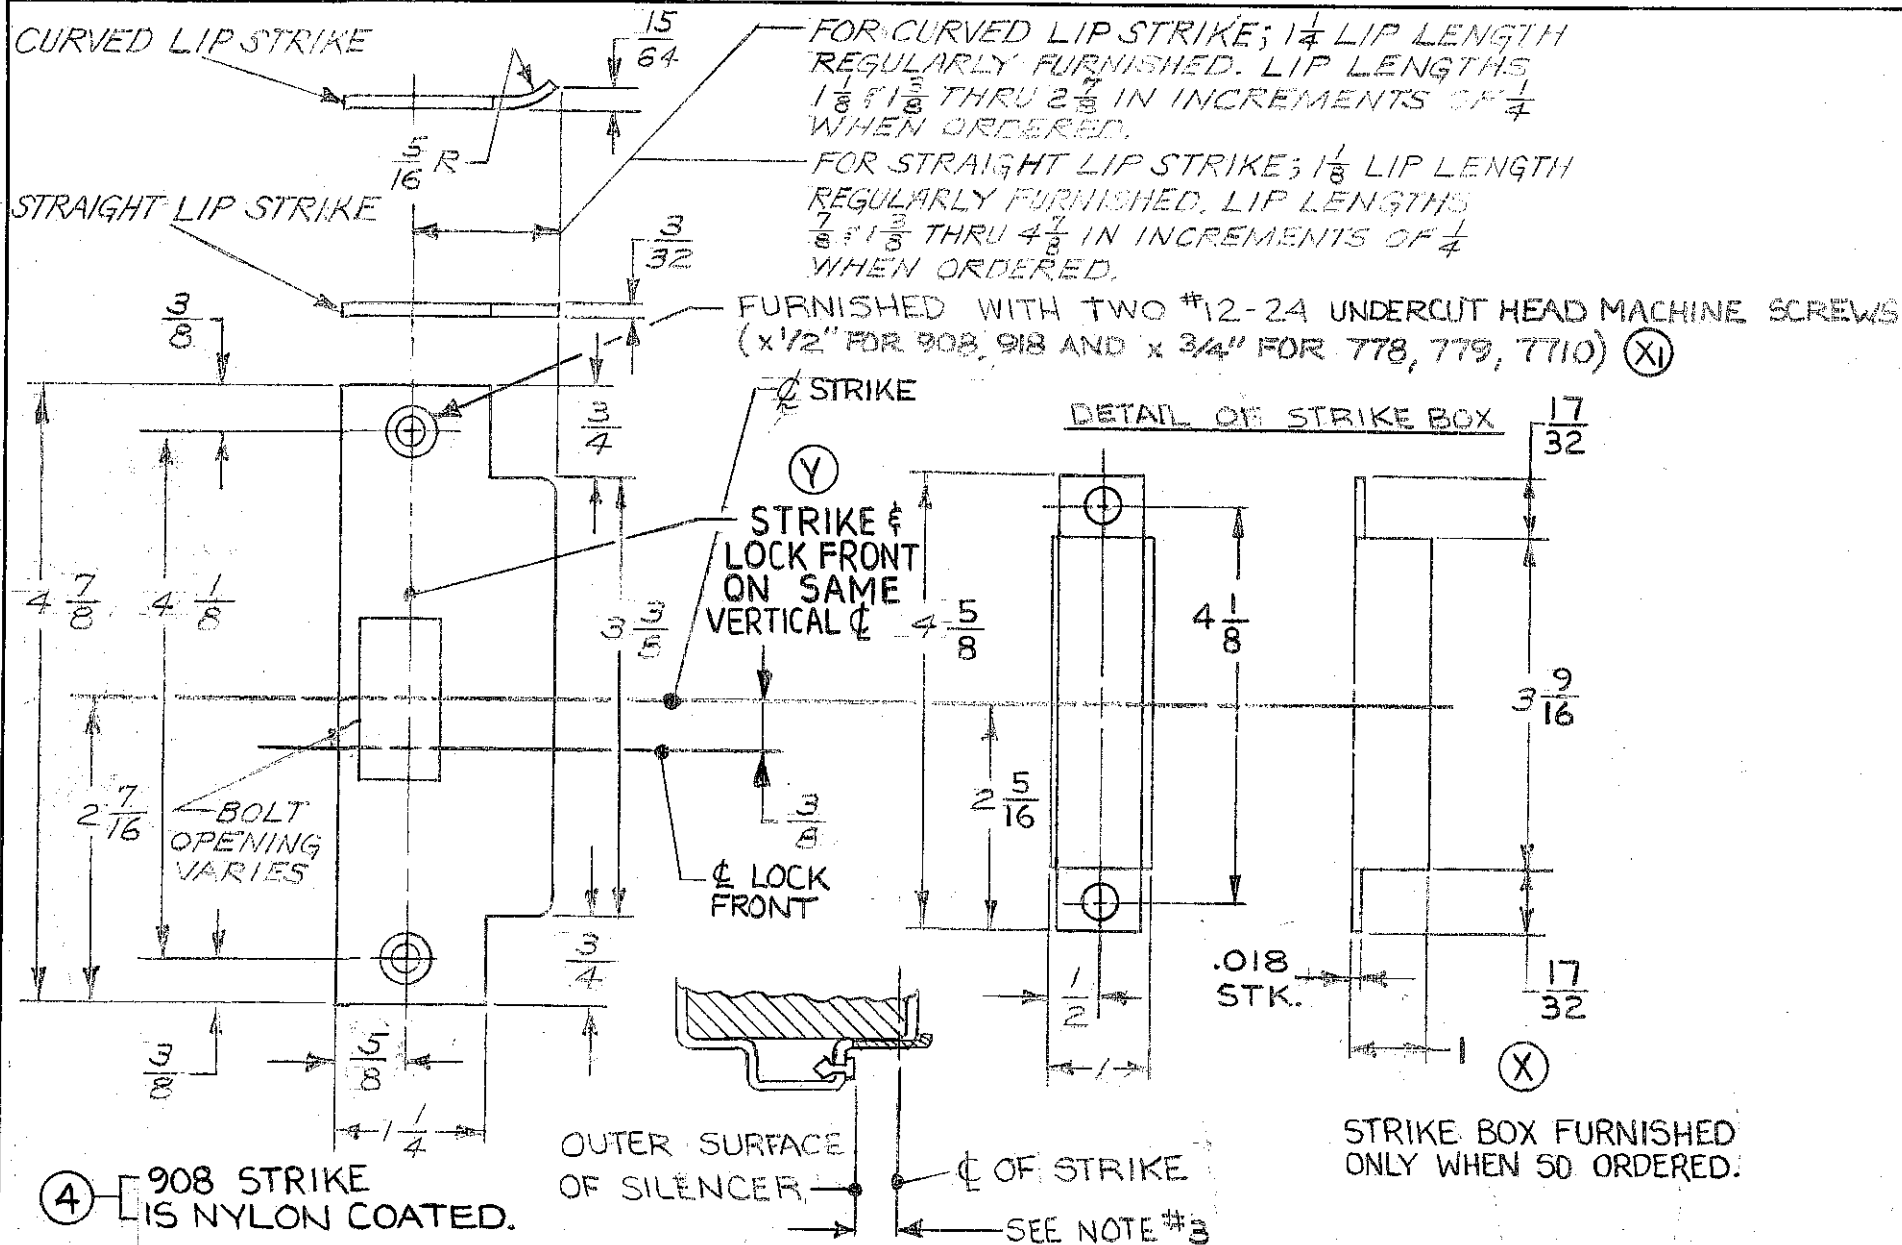

④ 908 STRIKE IS NYLON COATED.

③ WHEN DOOR SILENCERS ARE USED ON DOOR FRAME, LOCATE CENTERLINE OF STRIKE FROM SURFACE OF DOOR SILENCER AS SHOWN.

② DIMENSIONS SHOWN ARE MAXIMUM PART DIMENSIONS.

① STRIKE OUTLINE FOR FRAME FITS CURRENT ANSI A115.1 STANDARD.

SARGENT & COMPANY

NEW HAVEN 9, CONN.

TEMPLATE: MORTISE LOCK CURVED OR STRAIGHT LIP STRIKE N^os 778, 779, 7710, 908 AND 918.

RELEASE DATE

18 OCT 90

TEMPLAT NO.

3908 Y