

SPECIALTY GLASS

Specialty glass is available for lite kit and borrowed lite applications. Contact us with the specification requirements for a quote and lead-time.

Glass with Integrated Blinds

Standard configuration includes:

- Commercial grade hermetically sealed venetian blind system inside insulating glass unit – 1-1/8" thick
- Interior or exterior applications
- Clear tempered safety glass
- Magnetic slider, placed on the right or left-hand side of the glass for tilting, lowering and raising functions
- Minimum width = 11-7/8" wide
- To be used with L-GLF100-SP, 1-1/8" glass
- Blind colors: White

Special features and glass types available to meet specification requirements.

X-Ray Safety Lead Glass


- Thickness = 5/16" to 5/8"
- Lead equivalency = 1/16" to 3/16"
- Glass sizes available up to 48" x 96"

Bullet Resistant Glass

- Bullet resistance levels 3 and 8
- Meets UL 752 with no spall
- Glass sizes available up to 48" x 96"

Other Specialty Glass

Laminated, Mirrored, Frosted, and special thickness Tempered or Insulated

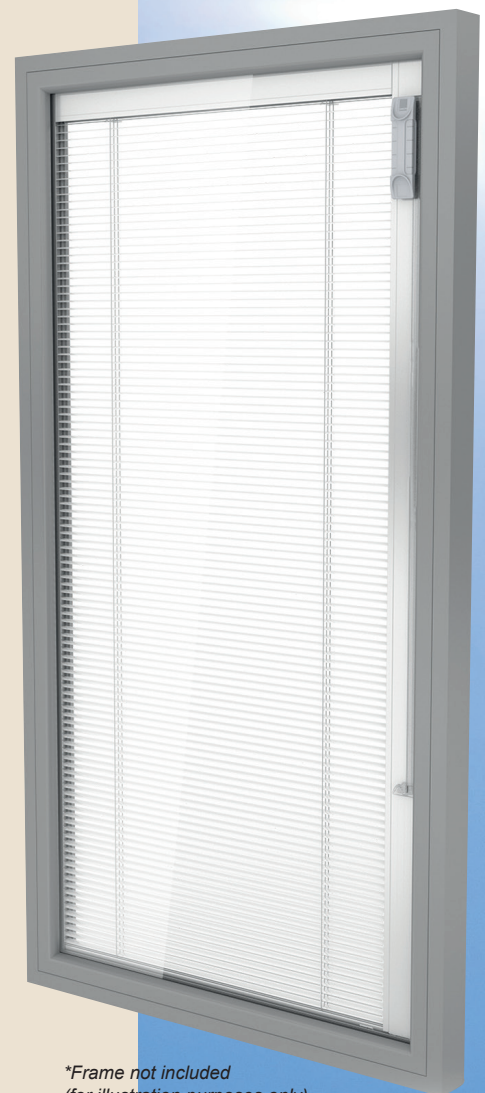

**Frame not included
(for illustration purposes only)*

NATIONAL GUARD PRODUCTS

4985 East Raines Road • Memphis, TN 38118

Phone: (800) 647-7874 • Fax: (800) 255-7874 • www.ngp.com

