


- Do Not Scale Drawing
- Right Hand Door Shown
- Dimensions Are Given In Inches
(Millimeters)

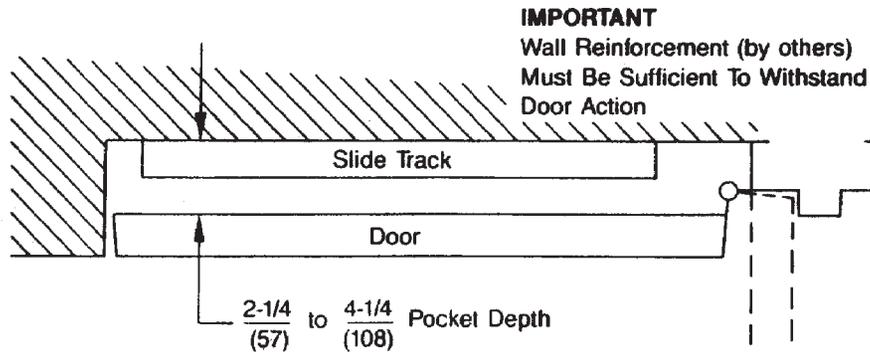

| Door Width | Closer |
|--|------------|
| Up to $\frac{42"}{1.07m}$ | 7706STP |
| $\frac{43"}{1.09m}$ to $\frac{48"}{1.22m}$ | 7706EP-STP |

| TYPE OF FASTENER | DOOR OR FRAME | PREPARATION |
|---|------------------|--|
| #14 Type "A" Sheet Metal Screw | Wood | 7/32" (5.5mm) |
| 1/4-20 Machine Screw | Hollow Metal | #7(.201 dia.) or 5.10mm. drill-1/4-20 tap |
| SNB (Sex Nut & Bolt) (Optional) | Hollow Metal | 9/32" (7.00mm) thru... 3/8" (9.50mm) door face Opposite to closer |
| | Aluminum or Wood | 3/8" (9.50mm) thru... |
| TBGN (Thru Bolt & Grammel Nut) (Optional) | All | 9/32" (7.00mm) thru... 3/8" (9.50mm) diameter 3/8" (10mm) deep, door Face opposite to closer |

7706STP or 7706EP-STP Series Closers
Slide Track Closer for 90° Wall Pocket Installation
For Pocket Depths 2-1/4" to 4-1/4" (57mm to 108mm)
(See Chart for Closer Sizing)



ASSA ABLOY

www.nortondoorcontrols.com

TEMPLATE NUMBER

7377-0505

DATE

07-08