


- Right hand door shown.
- Do not scale drawing.
- Dimensions are given in $\frac{\text{inches}}{\text{(mm.)}}$
- Minimum ceiling clearance for unit is 4-5/8 (118mm).
- Maximum door opening
 - Non Hold Open with Spring Buffer -110°
 - Non Hold Open without Spring Buffer -180°
 - Hold Open -110°



Preparation for Fasteners		
Fasteners	Door or Frame	Drill-Sizes
#14 type "A" S.M. screw	Wood	7/32" (5.5mm)
1/4"-20 machine-screw	Metal	drill: #7 (.201") tap: 1/4"-20
Sex-nuts and bolts (Optional)	Hollow-Metal	9/32" (7.00mm.) through; 3/8" (9.50mm.) door-face opposite to closer
	Aluminum or Wood	3/8" (9.50mm.) through
Through-bolt and grommet-nuts (Optional)	All	9/32" (7.00mm.) through; 3/8" (9.50mm.) dia. x 3/8" (10mm.) deep door-face opposite to closer

J7700ST/J7500ST Series Non Hold Open Door Closer
J7700ST-H/J7500ST-H Series Hold Open Door Closer
 Hinge Side Top Jamb Slide Track Application
 With Backplate No. 7786JP

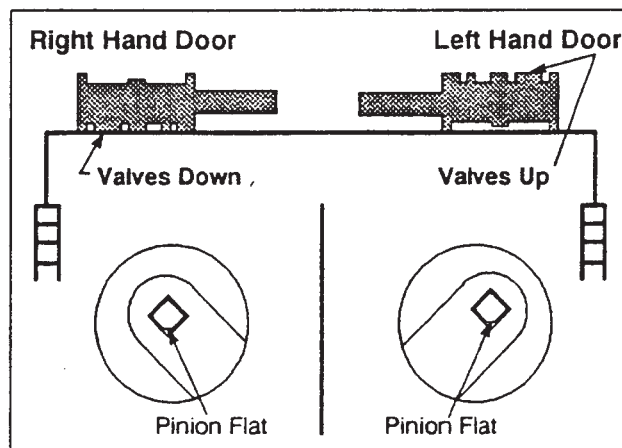

ASSA ABLOY

www.nortondoorcontrols.com

TEMPLATE NUMBER

7377-0515

DATE

07-08