


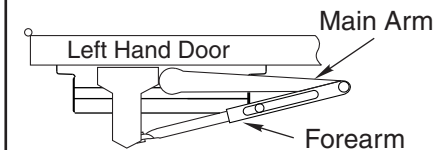


Position of Arm Mark and Pinion Flat



- Do not scale drawing.
- Left hand door shown.
- Dimensions are in inches (mm).
- Hollow metal doors require channel or box type reinforcement when thru bolt mount is specified.
- Sex bolt may be required for wood or plastic faced fire door mounting.
- Minimum thickness recommended for reinforcements in hollow metal doors and frames: .1046 (2.66mm) unless otherwise noted.

P8100, P8300 or P8500 Series Door Closers x 7701-6A Arm Assembly
For 180° Door Swing Using Wide Throw Hinges – 8" (200mm) Max.
With or Without 8148, 8158 or 8548 Drop Plate
Non Hold Open Parallel Arm Application
Door Closer Sizes 1 thru 6

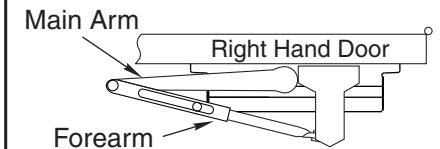

ASSA ABLOY

www.nortondoorcontrols.com

TEMPLATE NUMBER

7380-0214

DATE

09-08