


View from Floor Looking Up

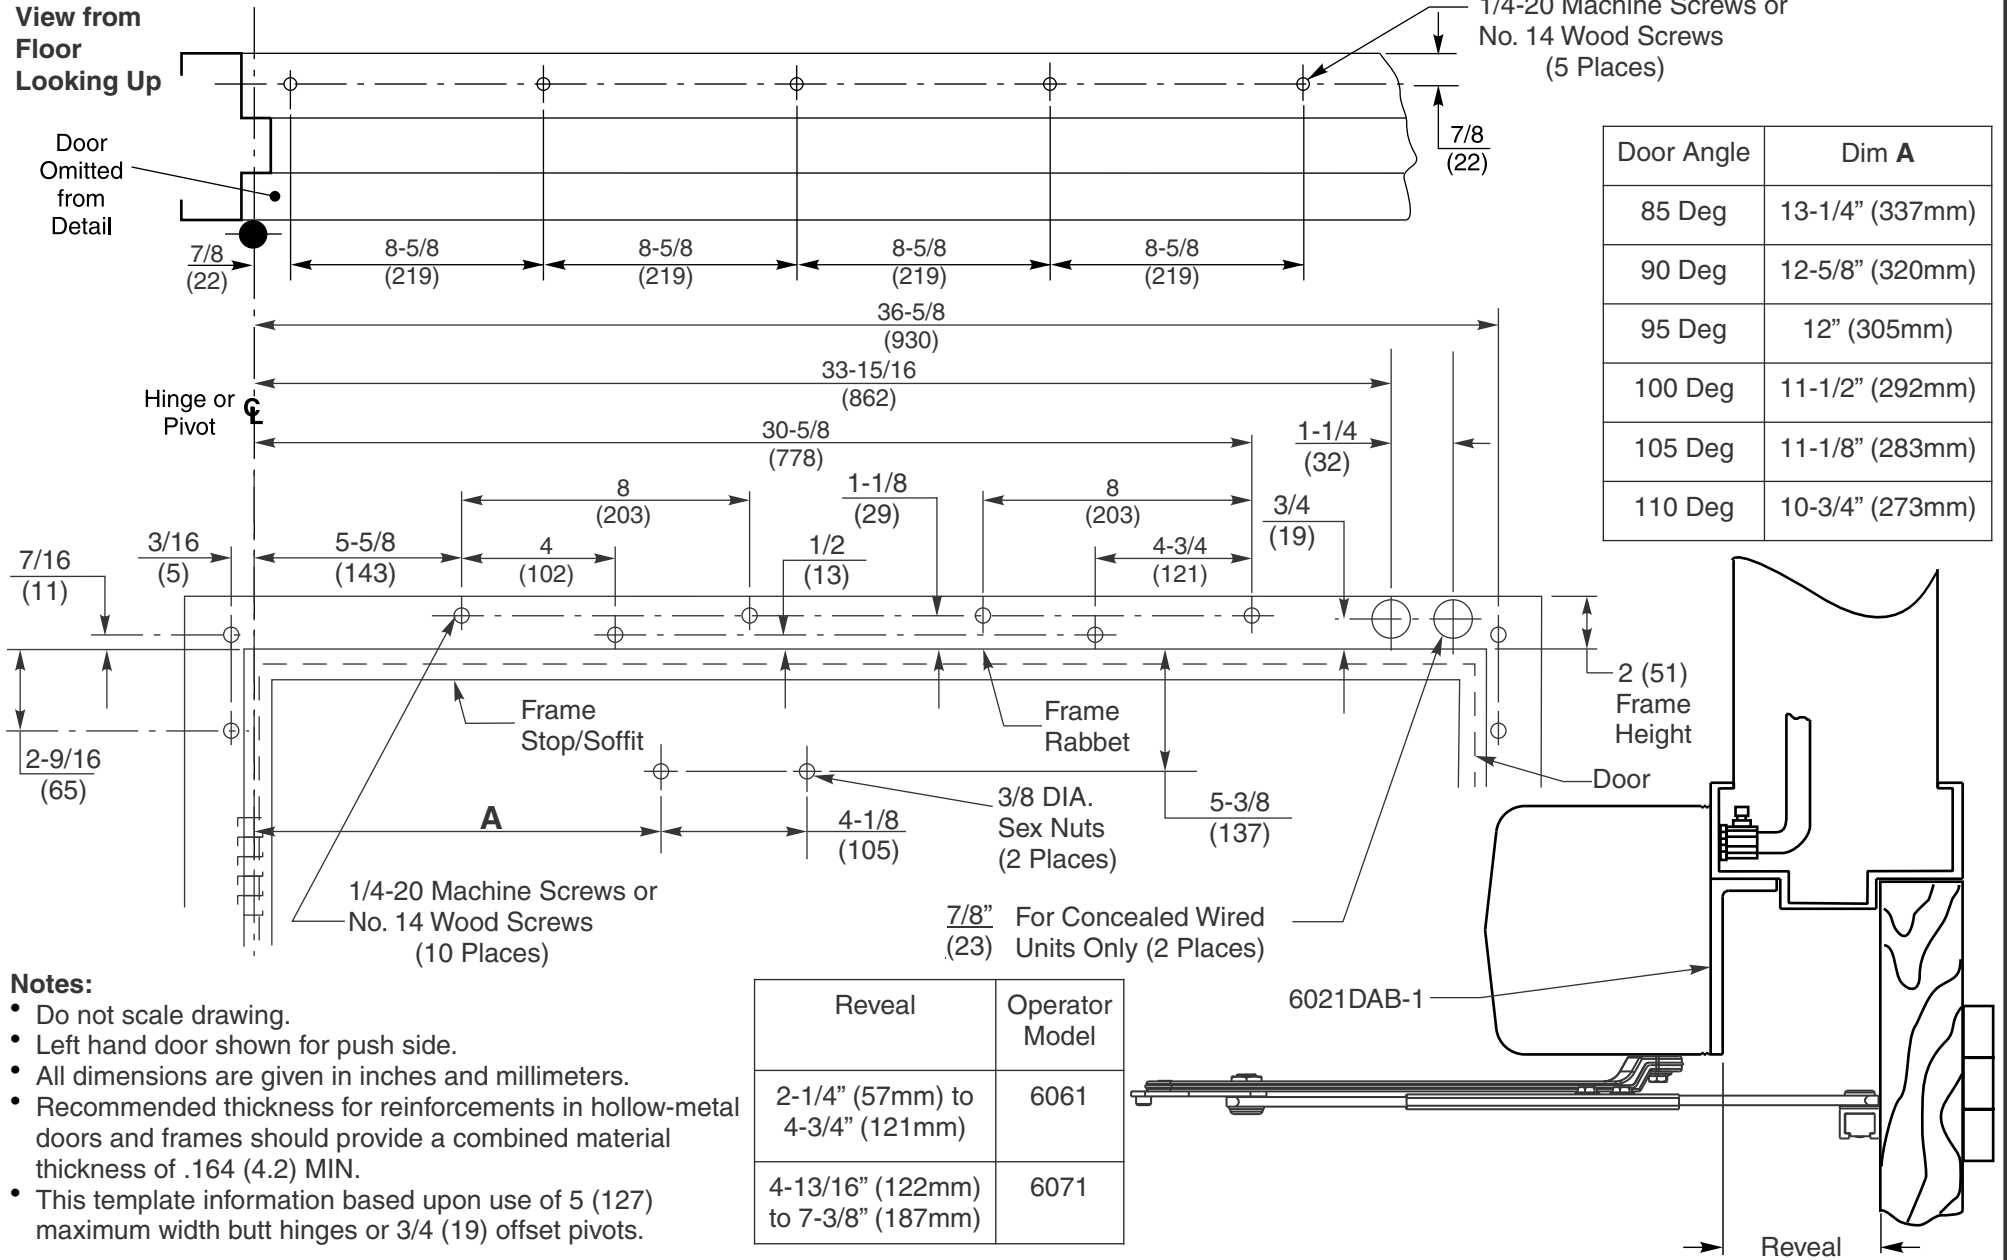

Notes:

- Do not scale drawing.
- Left hand door shown for push side.
- All dimensions are given in inches and millimeters.
- Recommended thickness for reinforcements in hollow-metal doors and frames should provide a combined material thickness of .164 (4.2) MIN.
- This template information based upon use of 5 (127) maximum width butt hinges or 3/4 (19) offset pivots.

**6061/6071 Series Operator Installation Template
for Drop Application using 6021DAB-1 Drop Angle Bracket
on 36" wide doors
For Reveal of 2-1/4" (57mm) to 7-3/8" (187mm)**

Norton®

ASSA ABLOY

www.nortondoortcontrols.com

TEMPLATE NUMBER	REV	DATE
80-7360-1012-020	1	07/19