



Series 7290MPI x 790 (infinite hold open range)
 Series 7290MPS x 790 (selective hold open range)
 Non-Hold-Open Models

ASSA ABLOY

Installation Instructions

*For wood doors 1- 3/4" to 2 - 1/4" (45-57mm) thick
 hung in a hollow metal frame*

**Fire Block for
 Overhead Concealed Closers
 Holder Releasing Device
 with Rigid Slide Arm**


CAUTION
 An incorrectly installed or improperly
 adjusted door closer can cause property
 damage or personal injury. These instructions
 should be followed to avoid the possibility
 of misapplication or misadjustment.

*Standard butt hinge
 Labeled 20 minute fire
 door openings*

Supplemental sheet for use with Installation Instructions and separate template.

Note:

1. Do not scale drawing
2. Hardware dimensions shown (for cutouts)
3. Dimensions are in inches.
4. This dimension must be taken from separate template provided.

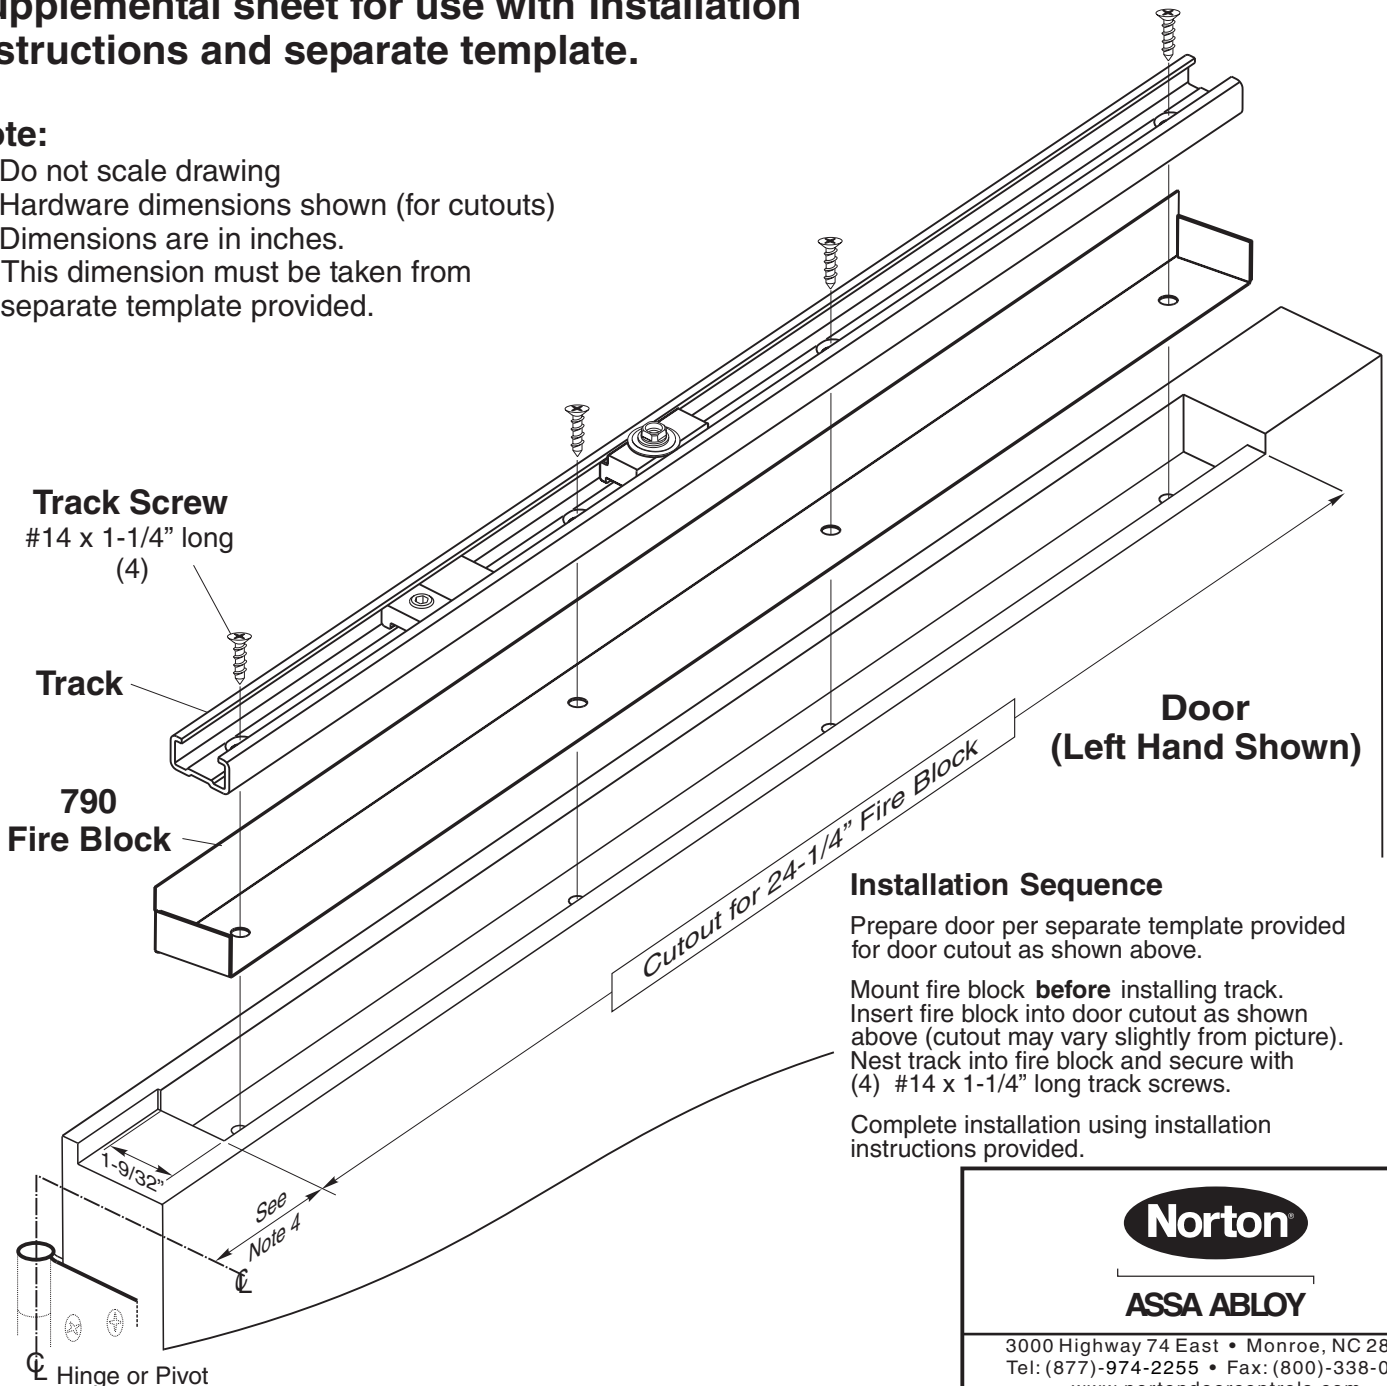

Norton
ASSA ABLOY

3000 Highway 74 East • Monroe, NC 28112
 Tel: (877)-974-2255 • Fax: (800)-338-0965
 www.nortondoortcontrols.com