


- Do Not Scale Drawing
- Right Hand Door Shown
- Dimensions Are Given In Inches  
(Millimeters)

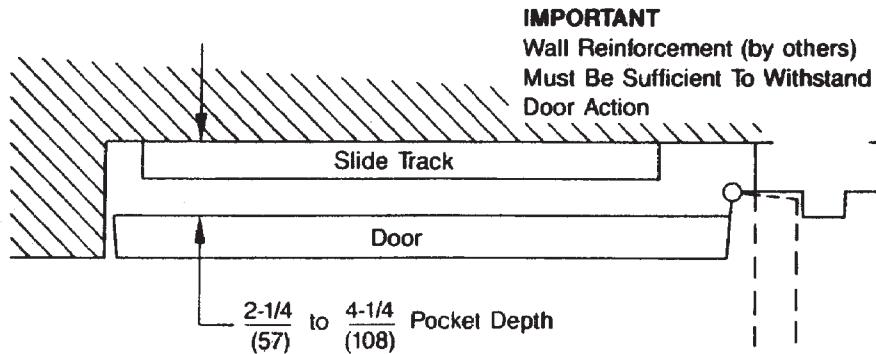

Closer Sizing Chart	
Door Width	Closer
Up to $\frac{42"}{1.07m}$	7706STP
$\frac{43"}{1.09m}$ to $\frac{48"}{1.22m}$	7706EP-STP

PREPARATION FOR FASTENERS		
TYPE OF FASTENER	DOOR OR FRAME	PREPARATION
#14 Type "A" Sheet Metal Screw	Wood	7/32" (5.5mm)
1/4-20 Machine Screw	Hollow Metal	#7(.201 dia.) or 5.10mm. drill-1/4-20 tap
SNB (Sex Nut & Bolt) (Optional)	Hollow Metal	9/32" (7.00mm) thru... 3/8" (9.50mm) door face Opposite to closer
	Aluminum or Wood	3/8" (9.50mm) thru...
TBGN (Thru Bolt & Grammel Nut) (Optional)	All	9/32" (7.00mm) thru... 3/8" (9.50mm) diameter 3/8" (10mm) deep, door Face opposite to closer

**7706STP or 7706EP-STP Series Closers**  
**Slide Track Closer for 90° Wall Pocket Installation**  
**For Pocket Depths 2-1/4" to 4-1/4" (57mm to 108mm)**  
**(See Chart for Closer Sizing)**



**ASSA ABLOY**

TEMPLATE NUMBER	REV	DATE
<b>7377-0505</b>	<b>3</b>	<b>12/21</b>