
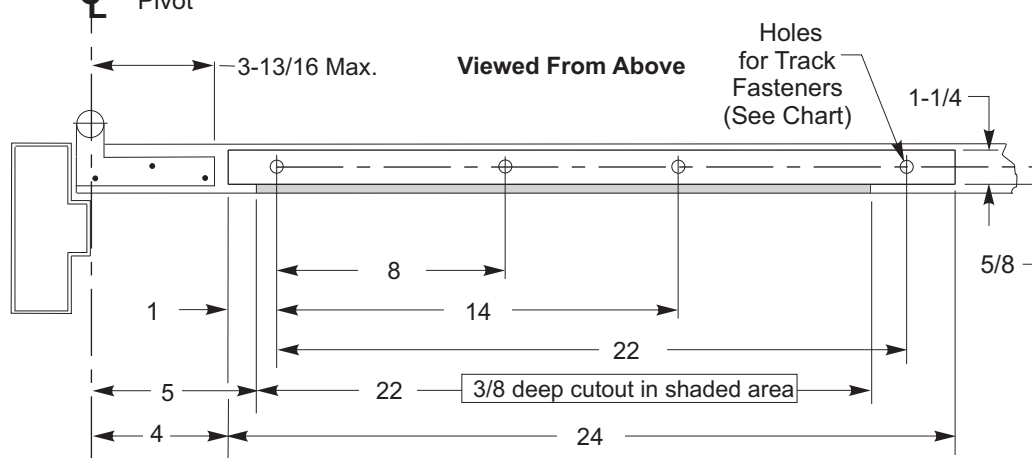


**Adjustable Hold Open**  
 85°-95°

Dead stop at 5° beyond hold open point.

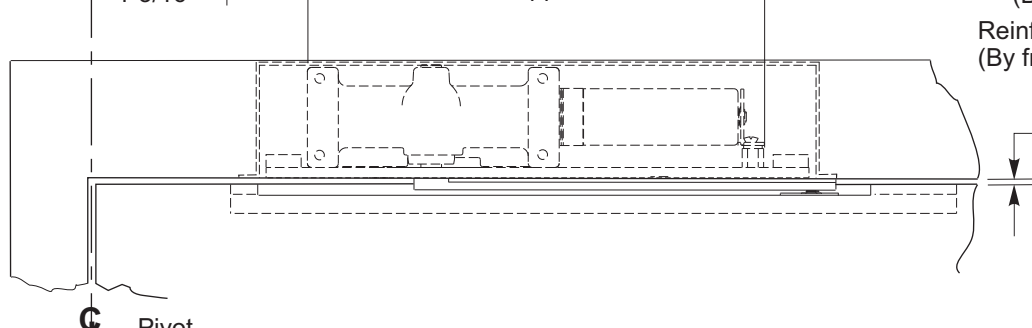

- NOTES:**
- Do not scale drawing.
  - Left hand door shown.
  - Hardware dimensions shown (not cutout).
  - Dimensions are in inches (see chart for metric conversion).
  - Minimum thickness recommended for reinforcements in hollow metal doors and frames: .1046" (2.66mm.) unless otherwise noted.
  - Track is 24 inches long.
  - For doors less than 30 inches wide, contact factory for modification requirements.

METRIC CONVERSION CHART	
Inches	mm.
1/8	3.2
1/4	6.4
3/8	9.5
5/8	15.9
1	25.4
1-3/16	30.1
1-1/4	31.8
1-3/4	44.5
2	50.8
2-1/4	57.2
3-3/4	95.3
3-13/16	96.8
4	101.6
5	127.0
8	203.2
14	355.6
15-3/4	400.0
16-7/16	417.5
22	558.8
24	609.6
30	762.0

Fastener	Use	Preparation
1/4-20 machine screw	metal frame and metal door	#7 (.201" dia.) or 5.10mm. drill 1/4-20 tap
#14 wood screw	wood door	7/32" or 5.5 mm. drill

**7900H-OP Series Door Closers**  
**For Use on Doors Hung on 3/4" Offset Pivots**  
**Hold Open Installation**



TEMPLATE NUMBER	REV	DATE
<b>7379-0256</b>	<b>3</b>	<b>12/21</b>