



Opening	Dimension "A"		Dimension "B"	
	inches	mm.	inches	mm.
To 120°	9-5/8	244	3-3/4	95
Over 120°	7-1/8	181	1-1/4	32

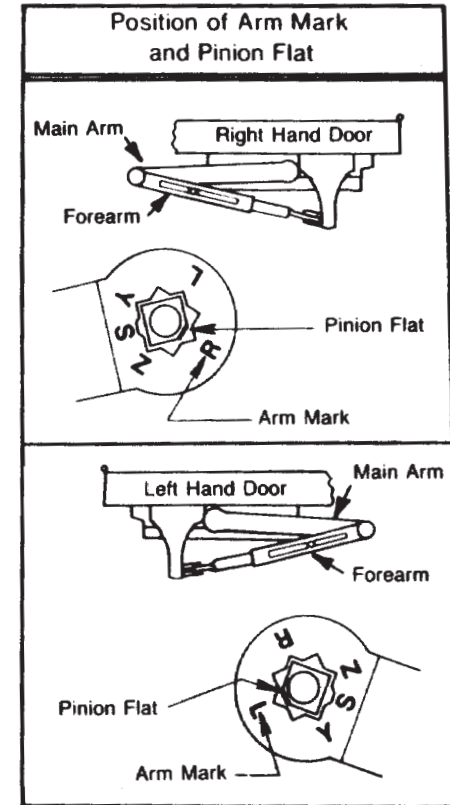

- Do not scale drawing.
- Left hand door shown.
- Dimensions are in inches (mm.).
- Hollow metal doors require channel or box type reinforcement when thru bolt mount is specified.
- Sex bolt required for wood or plastic faced fire door mounting.
- Minimum thickness recommended for reinforcements in hollow metal doors and frames: .1046" (2.66 mm.) unless otherwise noted.

P8000 Series Door Closer
Parallel Arm With 2018B For Rabbet Application With or Without 8148 Drop Plate
P8100, P8300, and P8500 Sizes 1 Thru 6

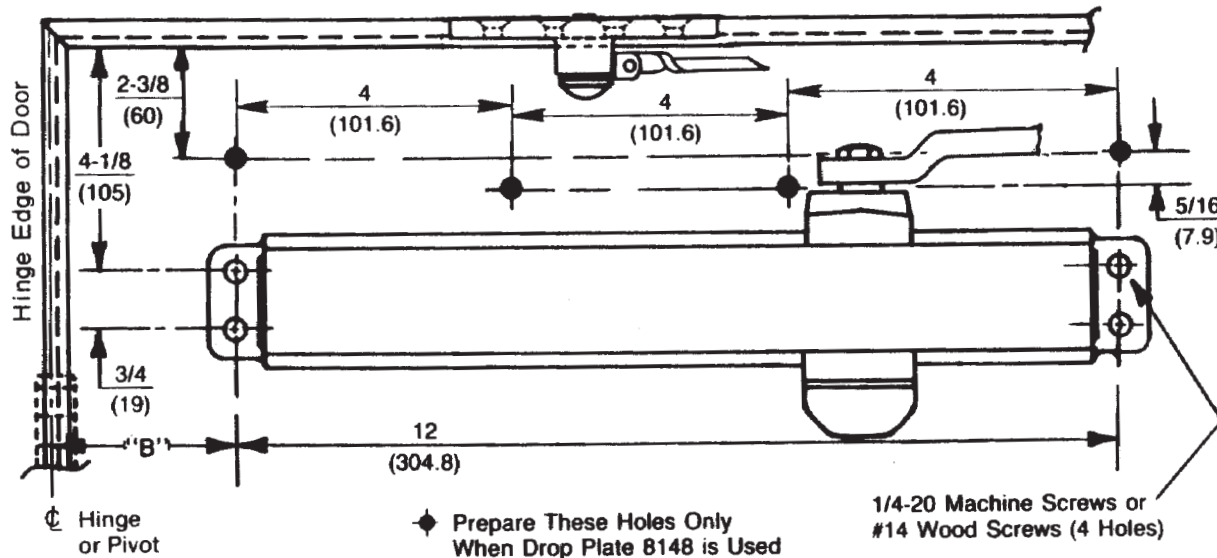

TEMPLATE NUMBER	REV	DATE
7380-0204	3	12/21