

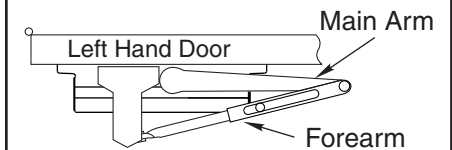



Position of Arm Mark and Pinion Flat

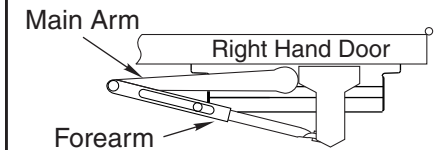

- Do not scale drawing.
- Left hand door shown.
- Dimensions are in inches (mm).
- Hollow metal doors require channel or box type reinforcement when thru bolt mount is specified.
- Sex bolt may be required for wood or plastic faced fire door mounting.
- Minimum thickness recommended for reinforcements in hollow metal doors and frames: .1046 (2.66mm) unless otherwise noted.

**P8100, P8300 or P8500 Series Door Closers x 7701-6A Arm Assembly**  
**For 180° Door Swing Using Wide Throw Hinges - 8" (200mm) Max.**  
**With or Without 8148, 8158 or 8548 Drop Plate**  
**Non Hold Open Parallel Arm Application**  
**Door Closer Sizes 1 thru 6**

Approved 2022-02-26



ASSA ABLOY

| TEMPLATE NUMBER | REV | DATE  |
|-----------------|-----|-------|
| 7380-0214       | 3   | 12/21 |