

729R

SFIC: Showcase, Ratchet Lock



For BEST style interchangeable core cylinders

ANSI/BHMA:
Complies with clause 6.3
(8.2~8.4) of ANSI/BHMA
A156.11 ANSI standards

SPECIFICATIONS

Retrofits: Best 3S

ANSI/BHMA: Complies with clause 6.3 (8.2~8.4) of ANSI/BHMA A156.11 ANSI standards

Use: Sliding glass or wood doors

Body: Zinc die cast

Strap: Steel

Finish: 26D

Packaged: Packed 10 per box

KEYING INFORMATION

Cores: Not included.

Accepts: Best, Arrow, Falcon, KSP, Schlage SFIC or equivalent small format interchangeable cores

Compatible electronic cylinders: Medeco Nexgen XT or VIDEX CyberLock SFIC cylinders

INCLUDED ACCESSORIES

729RS-1 strap for 3/16" to 1/4" material thickness

725-1 spacer to fit 6 or 7 pin cores

725-PA plastic thumbturn

OPTIONAL ACCESSORIES

Alternate straps: 729RS-2 strap for 3/8" material thickness, or 729RS-3 strap for up to 5/8" material thickness

SFIC cores: 206/207 Series



US26D Finish

INCLUDED ACCESSORIES



725-PA



725-1



WARNING: This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



**OLYMPUS
LOCK**
INC

729R

SFIC: Rim Latch Door & Drawer Cabinet Lock

ANSI/BHMA:
Complies with clause 6.3
(8.2~8.4) of ANSI/BHMA
A156.11 ANSI standards

OPTIONAL ACCESSORIES - See our website for a complete list of optional components.

206/207 Series

- 206 Series 6-pin SFIC cylinder
- 207 Series 7-pin SFIC cylinder



BEST compatible interchangeable core cylinders



AVAILABLE KEYWAYS


A	B	C	D	E	F	G	H	
J	K	L	M	Q	1C	1D	KMT300	

Alternate straps (available separately)


All straps are 6" in length.

- 729RS-2 strap for 3/8" material thickness
- 729RS-3 strap for up to 5/8" material thickness

729RS-2 strap for 3/8" material



729RS-3 adjustable strap for 3/8" to 5/8" material

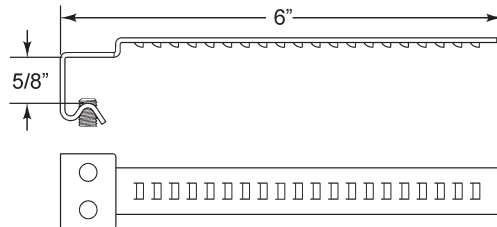

DIMENSIONS | TYPICAL INSTALLATION

