

# PD15REXKIT-ED

## INSTALLATION INSTRUCTIONS

The PD15REXKIT-ED is a field installable request to exit switch for AHT 8000/9000, PD15/16, Jackson 1285/1295, & Kawneer 1686 series exit devices.



### KIT INCLUDES

- A. REX switch
- B. 4 - Phillips screws
- C. 2- Sticky pad w/ zip tie
- D. REX sticker

### TOOLS REQUIRED

- Phillips screw driver

### SPECIFICATIONS


- Rating: .5A @24 VAC
- Configuration: Green - Common (C)  
Blue - Normally Open (NO)  
Gray - Normally Closed (NC)

### PD15 REX MATRIX


	Easy Order#	Mechanical unmodified	CAT Modified Solenoid	CAT Modified Motor	AHT/Jack/Kaw Solenoid	AHT/Jackson Motor
PD15REXKIT-ED	79148	✓	✓	✓	✓	✓

Mechanical = PD15/16, AHT 8000/9000, Kawneer 1686, Jackson 1285/1295

- Remove rear mounting bracket and slide REX bracket into existing groove in housing towards push pad.

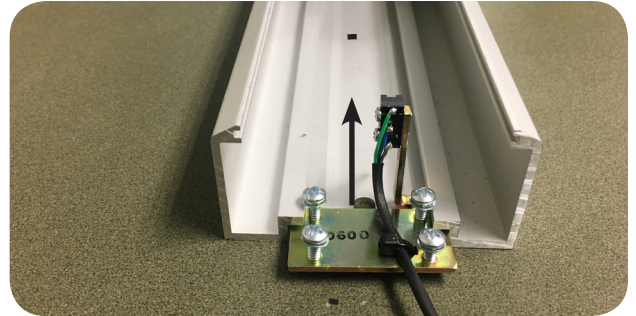

- Depress pushpad and slide until REX triggers on the pushpad, secure REX bracket by tightening all (4) screws.

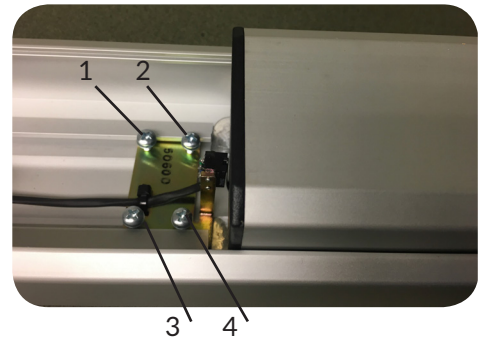

- Test placement by depressing pushpad to make sure switch activates.
- Add sticky pad and zip tie to secure REX wires and add wire configuration sticker.

