

2435 KIT

2435 Kit, completes with five heavy duty stainless steel faceplates, is designed for mortise and cylindrical locksets. It is reversible for left hand or right hand installation and operates at 12 and 24 VDC.

STANDARD FEATURES


- Heavy duty stainless steel construction
- Vertical adjustments allow for alignment with a wide variety of mortise locks with offset latches
- Dual voltage 12/24 VDC (VAC for intermittent use, not exceeding 10 seconds)
- Sliding keeper shim design for up to 1/8" (3 mm) adjustment for misaligned frames
- Endurance testing: 1,000,000 cycles tested

SPECIFICATION


VOLTAGE	12/24 VDC
CURRENT	250 mA/12 VDC, 150 mA/24 VDC
STATIC STRENGTH	1000 LB (454 KG)
DYNAMIC STRENGTH	33-ft-lbs. (4.56 m-kgs)
DIMENSION	3 5/16" (4 5/8") x 1 5/8" x 1 13/16"
Latch Throw	1" max with 1/8" door gap

Faceplates Dimensions

Deadbolt Latch Installation

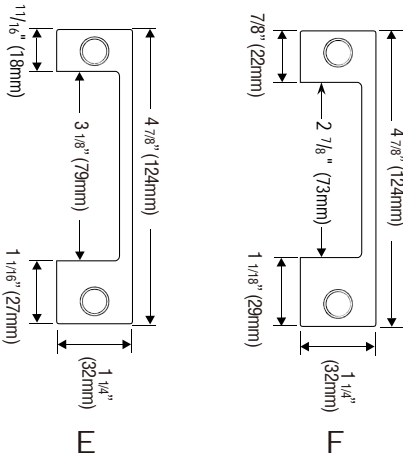


Latchbolt Installation

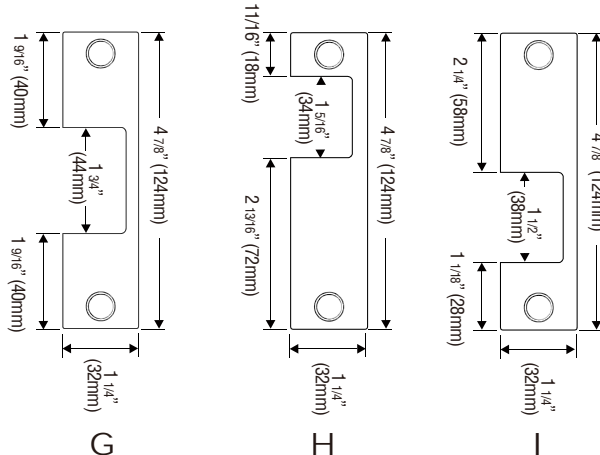

Changing Fail-Safe / Fail-Secure

2435 Kit is field reversible for fail-safe or fail-secure by changing the position of screws.

Fail-Safe (Power to Lock):

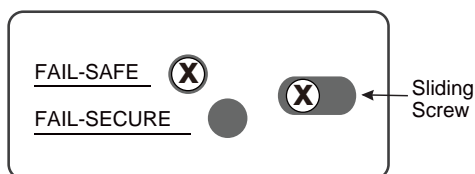

Fail-Secure (Power to Open):

