Rixson® is a registered trademark of Yale Security Inc., an ASSA ABLOY Group company. Copyright © 2001, 2009, Yale Security Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.

Hollow Metal Jamb Installation

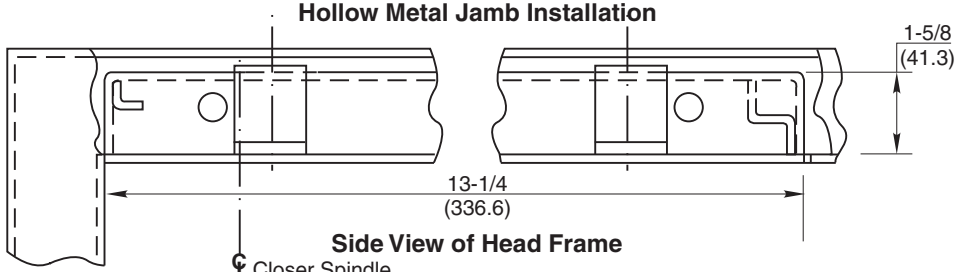

Side View of Head Frame

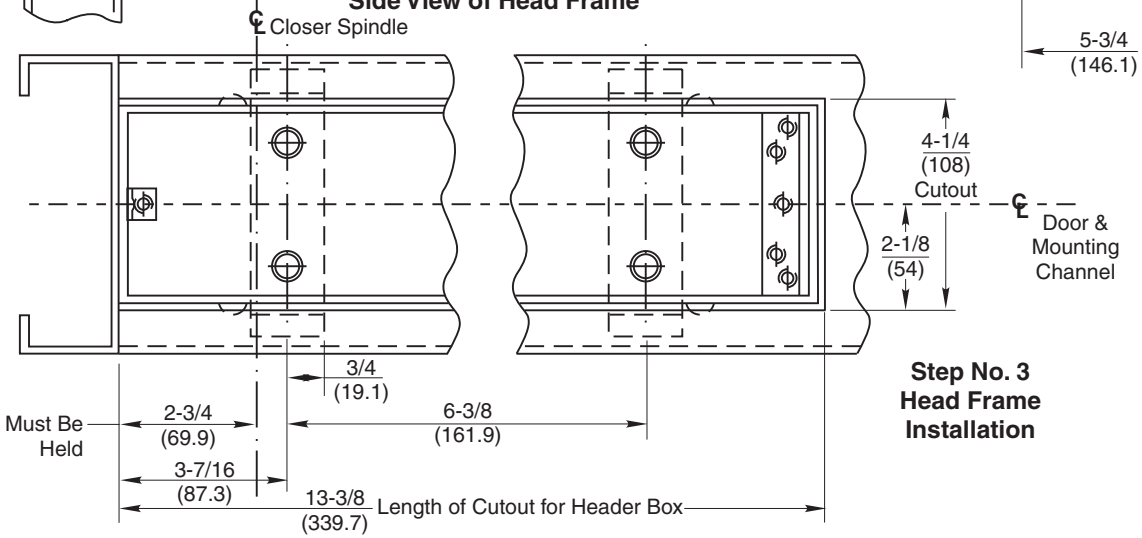

Step No. 3 Head Frame Installation

Under Side of Head Frame

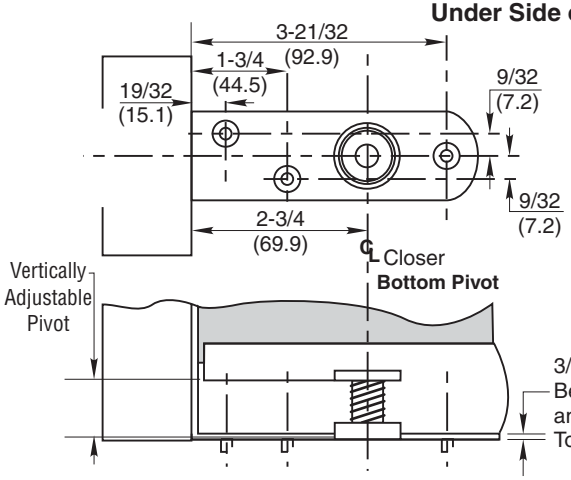

NOTES:

1. Do not scale drawing.
2. 2" (50.8) x 5-1/2" (139.7) minimum width head frame.
3. Single acting operation requires a door stop on the underside of frame.
4. Door radius recommended is 2-5/8" (66.7).
5. All dimensions given in inches (mm).

Step No. 1 Bracket (2 Reqd. by Others)

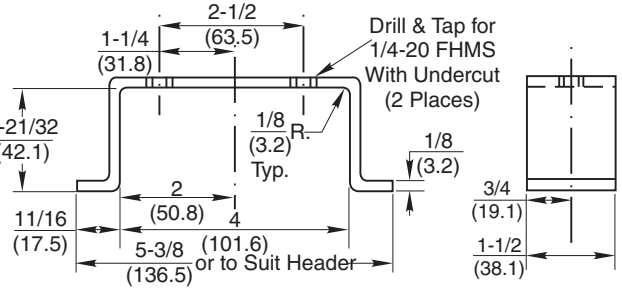



Top View

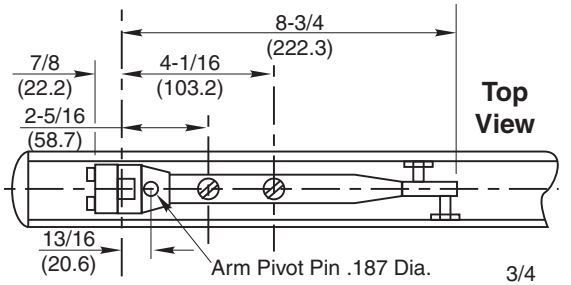

Side View

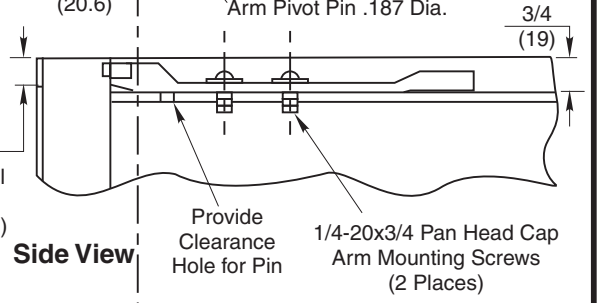

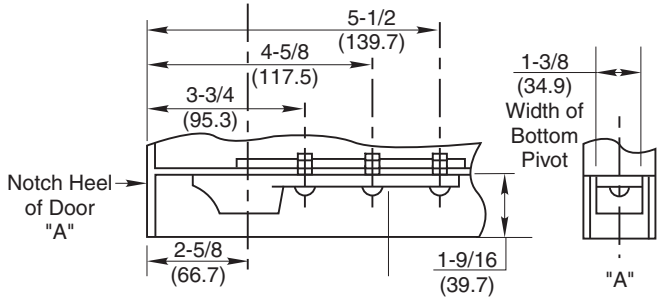

Side View (Bottom Pivot)

Step No. 2 Mounting Channel Assembly

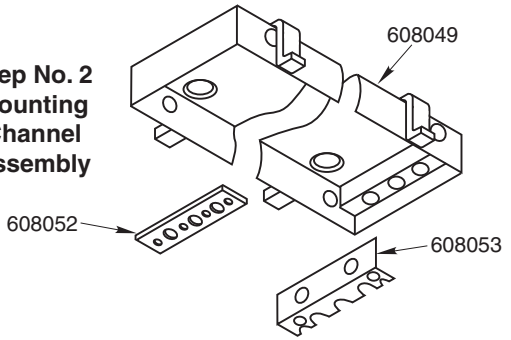

M608 Series
Overhead Concealed Door Closer
Center Pivoted for Metal Doors and Frames

RIXSON
ASSA ABLOY
www.rixson.com

TEMPLATE NUMBER	DATE
OC60435	05-09