




A removable frame stop must be used in combination with the closer for proper installation. Mounting holes for frame stop must span closer length. Stop must be removable to install closer and make proper adjustments.

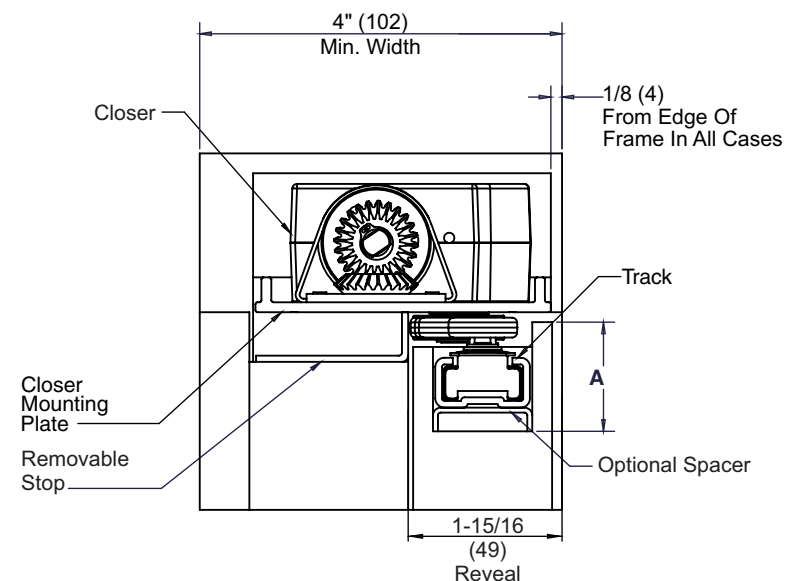

Notes:

1. For 180° opening, max. allowable butt hinge size is 5" x 5".
2. Min. stop thickness 1/2".
3. 1/8" door to soffit clearance required.
4. Reinforcing per ANSI/SDI-100 recommended for hollow metal doors and frames.
5. Auxiliary stop recommended.
6. Do not scale drawing.
7. Dimensions given in inches (mm).

Left Hand Door and Closer Shown
Right Hand Opposite

"A" Dimension	
Standard Application	1-1/16" (27)
Retrofit Track Option	1-3/8" (35)

Model 91 Overhead Concealed Closer Butt Hinge, Metal Frame

RIXSON

ASSA ABLOY

www.rixson.com

TEMPLATE NUMBER

OC60900

DATE _____

10-16