

# Architectural Door Accessories

## Rockwood Full Height LP3301 Order Form


The global leader in door opening solutions

Complete this form and email to: [orders.rockwood@assaabloy.com](mailto:orders.rockwood@assaabloy.com) / or fax to: 800.922.9212


### Customer Information

Company Name: \_\_\_\_\_ Date: \_\_\_\_\_  
 Account #: \_\_\_\_\_ Phone/Fax: \_\_\_\_\_ / \_\_\_\_\_  
 Email: \_\_\_\_\_ PO #: \_\_\_\_\_ Line #: \_\_\_\_\_


Full Height Bolt Up (FHU) Qty: \_\_\_\_\_

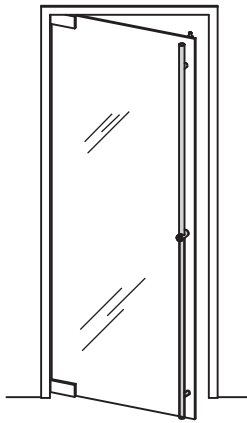

Full Height Bolt Down (FHD) Qty: \_\_\_\_\_



Full Height Bolts Both (FHB) Qty: \_\_\_\_\_

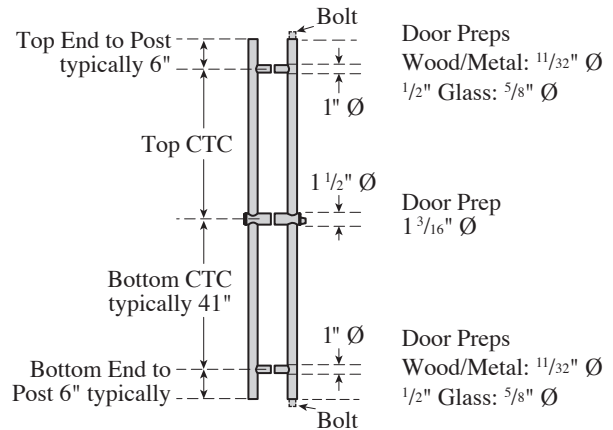

\*Bolts shown at top and bottom for visual purposes. Bolt(s) will be dependent on application chosen.

NOTE: Cylinder must be located 34"-48" above finished floor to meet ADA requirements. California ADA requires cylinder to be located 36"-46" above finished floor.

Finish: \_\_\_\_\_

Top CTC (from 10" to 80"): \_\_\_\_\_

Bottom CTC (from 10" to 80"): \_\_\_\_\_

Top End to Post (from 3" to 12" in 1/16" increments): \_\_\_\_\_

Bottom End to Post (from 3" to 12" in 1/16" increments): \_\_\_\_\_

Door Type:  Glass  Metal  Wood

Door Thickness: \_\_\_\_\_

Hole Size (for glass door application only): \_\_\_\_\_

Cylinder Type:  01-Stock Yale  02-SFIC Housing (standard)  03-SFIC Housing w/PCC  
 05-Customer Sending to Rockwood  07-Dummy Cylinder  09-7 PIN SFIC HSG w/Yale Core

Thumbturn Type:  ADA  Standard

**NOT TO SCALE**

300 Main Street  
 Rockwood, Pennsylvania 15557  
 P: 800.458.2424 | F: 800.922.9212  
[www.assaabloydooraccessories.us](http://www.assaabloydooraccessories.us) | [orders.rockwood@assaabloy.com](mailto:orders.rockwood@assaabloy.com)

Copyright © 2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.